
Scale base

HD

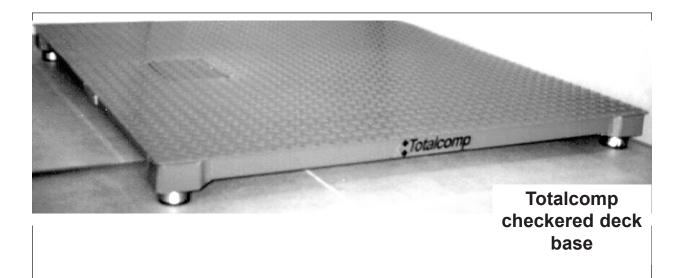

Channeled construction and high capacities make this heavy duty floor scale base perfect for rugged applications

- Channeled construction
- Nickel plated load cells
- Legal for Trade, NTEP
- Checkered deck construction

- Powder coat finish
- Optional ramps
- Capacities 1,000 10,000 lb
- Platform sizes from 2'x2' to 7'x7'

email: sales@totalcomp.com



Specifications

HD

The Totalcomp HD scale base is a rugged and sturdy with channel construction, Checkered safety tread deck. Painted steel. Comes with 15 ft of shielded load cell cable to connect to the indicator. NTEP 16-016 III, 5,000 div Legal for Trade

Part Number	Size	Capacity	Load cell	Weight	Stock
T2x2-1K-HD	2' x 2' x4.75"	1,000 lb	500 lb	95 lb	2080
T2x2-2K-HD	2' x 2' x4.75"	2,000 lb	1,000 lb	95 lb	2081
T2x2-3K-HD	2' x 2' x4.75"	3,000 lb	1,500 lb	95 lb	2082
T2x2-5K-HD	2' x 2' x4.75"	5,000 lb	2,500 lb	95 lb	2083
T3x3-1K-HD	3' x 3' x4.75"	1,000 lb	500 lb	136 lb	7859
T3x3-2K-HD	3' x 3' x4.75"	2,000 lb	1,000 lb	136 lb	3418
T3x3-3K-HD	3' x 3' x4.75"	3,000 lb	1,500 lb	136 lb	4371
T3x3-5K-HD	3' x 3' x4.75"	5,000 lb	2,500 lb	136 lb	3419
T4x4-5K-HD	4' x 4' x4.75"	5,000 lb	2,500 lb	225 lb	3433
T4x4-10K-HD	4' x 4' x4.75"	10,000 lb	5,000 lb	225 lb	3434
T4x5-5K-HD	4' x 5' x4.75"	5,000 lb	2,500 lb	315 lb	3435
T4x5-10K-HD	4' x 5' x4.75"	10,000 lb	5,000 lb	315 lb	3436
T4x6-5K-HD	4' x 6' x4.75"	5,000 lb	2,500 lb	350 lb	3437
T4x6-10K-HD	4' x 6' x4.75"	10,000 lb	5,000 lb	350 lb	3438
T4x8-10K-HD	4' x 8' x4.75"	10,000 lb	5,000 lb	400 lb	2084
T5x5-5K-HD	5' x 5' x4.75"	5,000 lb	2,500 lb	345 lb	3440
T5x5-10K-HD	5' x 5' x4.75"	10,000 lb	5,000 lb	345 lb	3441
T5x7-10K-HD	5' x 7' x4.75"	10,000 lb	5,000 lb	395 lb	3443
T5x8-10K-HD	5' x 8' x4.75"	10,000 lb	5,000 lb	445 lb	2085
T6x6-10K-HD	6' x 6' x4.75"	10,000 lb	5,000 lb	445 lb	3445
T7x7-10K-HD	7' x 7' x4.75"	10,000 lb	5,000 lb	525 lb	2086

Load cell outputCableFinishOptional3 mv/v FS14 ft 4 wirePowder coatRamps

Totalcomp Limited Warranty

Totalcomp warrants this product to be free of defects in materials and/or workmanship and suitable for the purpose intended as outlined in this sheet. This warranty is effective and shall cover the purchaser for one year from the date of shipment from our plant. If this product is found to be defective by our inspection in accordance with the above listed criteria, we will replace or repair it at our expense. For warranty service, please obtain a return authorization number from us and return the item, shipping prepaid, with a written description of the problem. We will respond promptly with the results of our evaluation.



email: sales@totalcomp.com