GS1042



GS1042 - General Sensor

- ✓ Capacities 15-100kg
- ✓ Moisture proof
- Anodized aluminum construction
- ✓ 2 mv/v, 0.02% total error

- ✓ Interchangeable with Toledo model 774
- ✓ Replacement for Tedea Model 1040
- √ 9 ft 6 cond cable




Specifications

GS1042

General Sensor

Interchangeable with Toledo model 774. Replacement for Tedea Model 1040/1042. Mounting screws are 1/4-20 UNC(coarse) with 3/4" spacing on both top and bottom. These cells have a unique humidity resistant protective coating assures long term stability even under harsh environment and extreme temperatures. 2 mv/v, 0.02% total error, 9 ft 6 cond cable, 415/350 ohm, anodized aluminum.

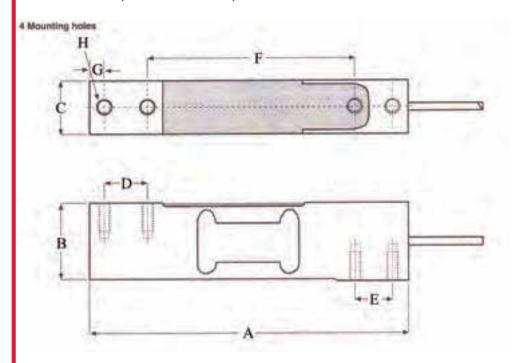

Color Code

Green	+Excitation
Black	-Excitation
White	-Signal
Red	+Signal
Blue	+Sense
Brown	-Sense

Dimensions in inches

Capacity	Α	В	С	D	Е	F	G	Н
1kg-20kg	5.90	1.57	0.79	0.75	0.75	3.94	0.25	1/4-20 UNC
50kg-1000kg	5.90	1.57	1.00	0.75	0.75	3.94	0.25	1/4-20 UNC

TOTALCOMP LIMITED WARRANTY

Totalcomp warrants this product to be free of defects in materials and/or workmanship and suitable for the purpose(s) intended as outlined on this sheet. This warranty is effective and shall cover the purchaser for one year from the date of shipment from our plant. If this product is found to be defective by our inspection in accordance with the above listed criteria, we will replace or repair in at our expense. For warranty service, please obtine a return autorization number from us and return the item, shipping prepaid, with a writen description of the problem. We will rspond promptly with the results of our evaluation.



99 Reagent Lane Fair Lawn, NJ 07410 Fax (201) 797-2287 Toll Free Fax (888) 797 2288 Phone (201) 797-2718 Toll Free Phone (800) 631-0347 Email sales@totalcomp.com Website www.totalcomp.com