


Load Cell Cable

Top quality load cell cable by the foot or by the roll!



- | | | |
|--|--|---|
| <ul style="list-style-type: none">● Standard cable● PVC jacket, gray Polyvinyl Chloride● 22 AWG American Wire Gauge copper conductors● 4 or 6 wire● Mylar shield and drain wire | <ul style="list-style-type: none">● Armor cable● Stainless steel braid Rodent resistant● 22 AWG American Wire Gauge copper conductors● 4 or 6 wire● Braided shield and drain wire | <ul style="list-style-type: none">● High performance● Polyurethane jacket for abrasion resistance● Teflon insulation for best resistance● 22 AWG American Wire Gauge copper conductors● 4 or 6 wire● Braided shield and drain wire |
|--|--|---|

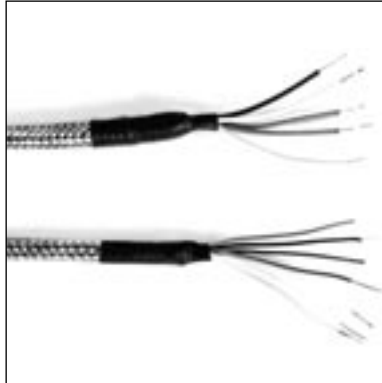

Totalcomp

Scales & Components

13-01 Pollitt Drive Ext, Fair Lawn NJ 07410
Phone 201-797-2718 Fax 201-797-2287

email: sales@totalcomp.com

Specifications

Cable

Totalcomp load cell cable is for use with strain gauge load cells.

4 wire or 6 wire cables are available depending whether the load cells use remote sense.

Two extra wires are required for remote sense.

Three styles of cable are available.

1. High performance for the most demanding applications.
2. Armor braided cable when there are animals that chew thru the jacket of the cable.
3. Most will use the standard PVC jacketed cable.

<i>Part Number</i>	<i>AWG</i>	<i>Jacket</i>	<i>Shield</i>	<i>Length</i>	<i>SKU</i>
Easy install PVC					
4 wire PVC cable	22	PVC	Mylar and drain	1-499 feet	190
4 wire PVC cable	22	PVC	Mylar and drain	500 ft roll	241
4 wire PVC cable	22	PVC	Mylar and drain	1,000 ft roll	242
6 wire PVC cable	22	PVC	Mylar and drain	1-499 feet	191
6 wire PVC cable	22	PVC	Mylar and drain	500 ft roll	244
6 wire PVC cable	22	PVC	Mylar and drain	1,000 ft roll	245
Armor Rodent Resistant					
4 wire cable	22	Stainless steel braid	Braided and drain	1-499 feet	1073
4 wire cable	22	Stainless steel braid	Braided and drain	500 ft roll	1074
4 wire cable	22	Stainless steel braid	Braided and drain	1-499 feet	1665
4 wire cable	22	Stainless steel braid	Braided and drain	500 ft roll	1666
High performance					
4 wire High performance cable	22	Polyurethane	Braided and drain	1-499 feet	1904
4 wire High performance cable	22	Polyurethane	Braided and drain	500 ft roll	1905
4 wire High performance cable	22	Polyurethane	Braided and drain	1,000 ft roll	1906
6 wire High performance cable	22	Polyurethane	Braided and drain	1-499 feet	1907
6 wire High performance cable	22	Polyurethane	Braided and drain	500 ft roll	1908
6 wire High performance cable	22	Polyurethane	Braided and drain	1,000 ft roll	1909

Totalcomp Limited Warranty

Totalcomp warrants this product to be free of defects in materials and/or workmanship and suitable for the purpose intended as outlined in this sheet. This warranty is effective and shall cover the purchaser for one year from the date of shipment from our plant. If this product is found to be defective by our inspection in accordance with the above listed criteria, we will replace or repair it at our expense. For warranty service, please obtain a return authorization number from us and return the item, shipping prepaid, with a written description of the problem. We will respond promptly with the results of our evaluation.



Totalcomp Scales & Components

13-01 Pollitt Drive Ext, Fair Lawn NJ 07410

Phone 201-797-2718 Fax 201-797-2287

email: sales@totalcomp.com