


LOAD CELL CABLES

Top Quality Load Cell Cable by the foot or by the roll!

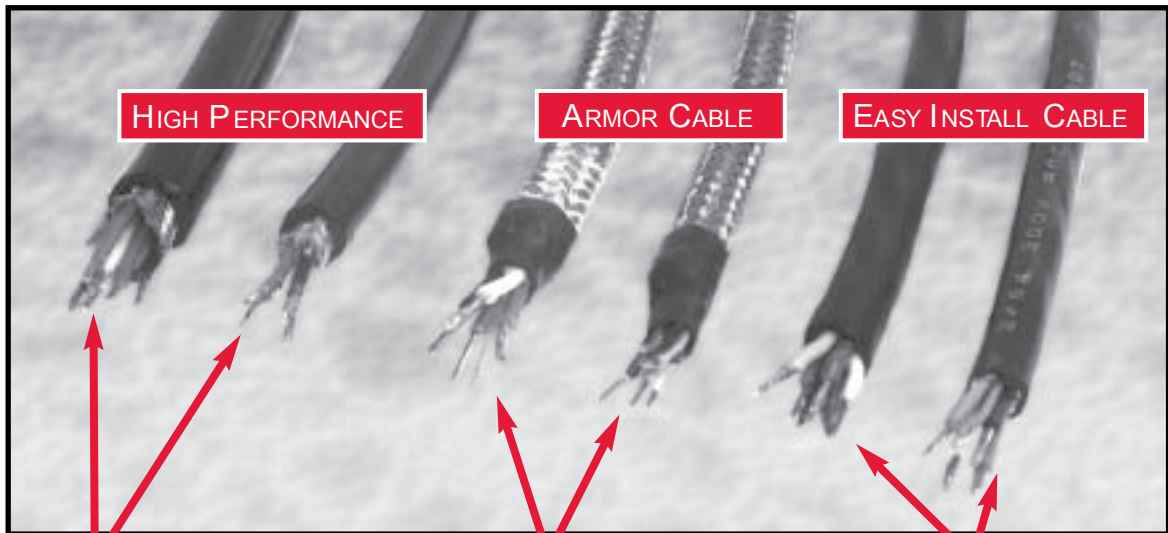

- ✓ **High performance abrasion resistant cables.**
- ✓ **Best insulation resistance.**
- ✓ **4 or 6 conductor 20 gage stranded tinned copper wiring.**
- ✓ **Individually teflon-insulated, nylon-wrapped conductors.**
- ✓ **Tinned copper sheilding with abrasion-resistant polyurethane jacket.**

- ✓ **Abrasion resistant tinned copper braid shielding.**
- ✓ **4 or 6 conductor.**
- ✓ **20 or 24 gage (AWG) stranded tinned copper wiring with vinyl insulation.**
- ✓ **Stainless steel braided armor outside.**

- ✓ **Standard cable - easy installation.**
- ✓ **4 or 6 conductor.**
- ✓ **Aluminum shield w/drain wire provides 100% shield coverage.**
- ✓ **20 gage (AWG) stranded tinned copper wiring with vinyl insulation.**



Totalcomp[®] Scales & Components

SPECIFICATIONS

HIGH PERFORMANCE

STOCK #	DESCRIPTION
4 Conductor cable	
1904	1 - 499 feet
1905	500 ft. roll
1906	1000 ft. roll
6 Conductor cable	
1907	1 - 499 feet
1908	500 ft. roll
1909	1000 ft. roll

ARMOR

STOCK #	DESCRIPTION
4 Conductor cable	
1073	1 - 499 feet
1074	500 ft. roll
6 Conductor cable	
1665	1 - 499 feet
1666	500 ft. roll

EASY INSTALL

STOCK #	DESCRIPTION
4 Conductor cable	
190	1 - 499 feet
241	500 ft. roll
242	1000 ft. roll
6 Conductor cable	
191	1 - 499 feet
244	500 ft. roll
245	1000 ft. roll

Cables are available in 20 or 24 gage 4 or 6 cond, or 24 gage 6 cond.

	4 Cond. -20 gage	4 Cond.-24 gage	6 Cond. -24 gage
Wire	90% Tinned Copper Braid Shield	90% Tinned Copper Braid Shield	90% Tinned Copper Braid Shield
Insulation	Polyethylene	PVC-nylon	PVC
Outside	Stainless Steel	Stainless Steel	Stainless Steel
Jacket	Black Polyurethane	Grey Polyurethane	Grey PVC
OD	0.295 inches	0.190 inches	0.220 inches
Lengths	specify	specify	specify

TOTALCOMP LIMITED WARRANTY

Totalcomp warrants this product to be free of defects in materials and/or workmanship and suitable for the purpose(s) intended as outlined on this sheet. This warranty is effective and shall cover the purchaser for one year from the date of shipment from our plant. If this product is found to be defective by our inspection in accordance with the above listed criteria, we will replace or repair it at our expense. For warranty service, please obtain a return authorization number from us and return the item, shipping prepaid, with a written description of the problem. We will respond promptly with the results of our evaluation.



Totalcomp®

Scales & Components

99 Reagent Lane
Fair Lawn, NJ 07410
Fax (201) 797-2287
Toll Free Fax (888) 797-2288
Phone (201) 797-2718
Toll Free Phone (800) 631-0347
Email sales@totalcomp.com
Website www.totalcomp.com