


# VERSADECK FLOOR SCALE

**BASES**



**TOTALCOMP  
Versadeck Polyethylene  
floor scale base**

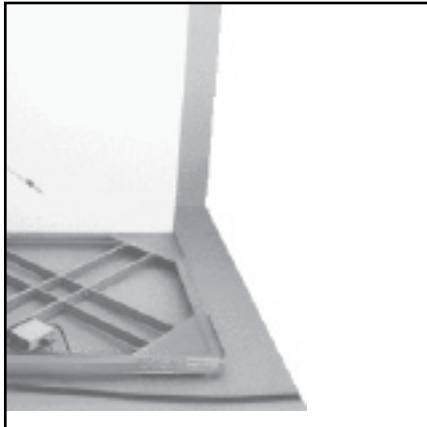

## **Versadeck Floor Scales have 1" Removable Polyethylene Tops for Easy Washdown.**

- ✓ **Washdown safe.**
- ✓ **Polyethylene top.**
- ✓ **Stainless Steel construction.**
- ✓ **Low profile design.**
- ✓ **Capacities from 1k to 10k lbs.**
- ✓ **Available with optional Stainless Steel ramps.**



**Totalcomp**<sup>®</sup> Scales & Components

# SPECIFICATIONS VERSADECK FLOOR SCALE

## VERSADECK POLYETHYLENE FLOOR SCALE BASE

The Versadeck polyethylene floor scale base has a removable 1" thick polyethylene Butcher Block top. They are constructed from Stainless Steel for washability and protection from harsh environments. This low profile base has a 1" removable Polyethylene top.

Part Number	Size	Capacity	Shipping Weight
TV-3030-1-LT	30" x 30" x 4"	1,000 lb	105 lb
TV-3030-2-LT	30" x 30" x 4"	2,000 lb	105 lb
TV-33-1-LT	3' x 3' x 4"	1,000 lb	140 lb
TV-33-2-LT	3' x 3' x 4"	2,000 lb	140 lb
TV-44-5-LT	4' x 4' x 4"	5,000 lb	210 lb
TV-44-10-LT	4' x 4' x 4"	10,000 lb	210 lb
TV-45-5-LT	4' x 5' x 4"	5,000 lb	300 lb
TV-45-10-LT	4' x 5' x 4"	10,000 lb	300 lb
TV-45-5-LT	4' x 6' x 4"	5,000 lb	325 lb
TV-45-10-LT	4' x 6' x 4"	10,000 lb	325 lb
TV-55-5-LT	5' x 5' x 4"	5,000 lb	380 lb
TV-55-10-LT	5' x 5' x 4"	10,000 lb	380 lb
TV-57-5-LT	5' x 7' x 4"	5,000 lb	465 lb
TV-57-10-LT	5' x 7' x 4"	10,000 lb	555 lb
<b>Stainless Steel Ramps (width x length)</b>			
TR-3030-10R	30" x 30"	10,000 lb	95 lb
TR-33-10R	3' x 3'	10,000 lb	125 lb
TR-44-10R	4' x 4'	10,000 lb	220 lb
TR-54-10R	5' x 4'	10,000 lb	270 lb

### Performance

**Full Scale Output**  
3.00 mV/V  
**Combined Error**  
±0.025% FS  
**Nonlinearity**  
±0.03% FS  
**Hysteresis**  
±0.03%  
**Creep**  
±0.03% FS in 1 hour  
**Non-Repeatability**  
±0.02% FS  
**Zero Balance**  
±1.0% FS

### Overload, Safe

150% FS  
**Overload, Ultimate**  
300% FS

### Electrical

**Bridge Resistance**  
Input 380 ohms  
Output 350 ohms  
**Excitation Voltage**  
10VDC (20VDC Max)  
**Insulation Resistance**  
5KMohms@50VDC

### Temperature

**Compensated Range**  
-10°C to +40°C  
**Temperature Operating Range**  
-20°C to +60°C  
**Effect on Zero Balance**  
0.002% FS/deg F  
**Effect on FS Output**  
0.002% FS/deg F

### Mechanical

**Material**  
Stainless Steel type 304  
Stainless load cells  
Polyethylene top  
1" thick, removable  
**Sealing**  
Washdown Safe

### Wiring

**Junction Box**  
Screw terminals  
NEMA 4X  
**Cable Length & Type**  
20 foot, 4 conductor  
**Cable Color Code**  
+ Excitation .....Red  
- Excitation .....Black  
+ Output .....Green  
- Output .....White  
Shield .....Yellow

### TOTALCOMP LIMITED WARRANTY

Totalcomp warrants this product to be free of defects in materials and/or workmanship and suitable for the purpose(s) intended as outlined on this sheet. This warranty is effective and shall cover the purchaser for one year from the date of shipment from our plant. If this product is found to be defective by our inspection in accordance with the above listed criteria, we will replace or repair it at our expense. For warranty service, please obtain a return authorization number from us and return the item, shipping prepaid, with a written description of the problem. We will respond promptly with the results of our evaluation.



# Totalcomp®

## Scales & Components

**99 Reagent Lane**  
**Fair Lawn, NJ 07410**  
**Fax (201) 797-2287**  
**Toll Free Fax (888) 797-2288**  
**Phone (201) 797-2718**  
**Toll Free Phone (800) 631-0347**  
**Email sales@totalcomp.com**  
**Website www.totalcomp.com**