

# GS1240-SS



## GS1240-SS - General Sensor

- ✓ Capacities 50-250kg
- ✓ Stainless steel construction
- ✓ Single point 400 x 400mm platform
- ✓ Interchange for LOCOSC 7160 load cell
- ✓ IP67 protection
- ✓ Available with metric and UNC threads



**Totalcomp**<sup>®</sup> Scales & Components


99 Reagent Lane \* Fair Lawn, New Jersey 07410  
Fax: 201-797-2287 \* Toll Free Fax: 888-797-2288 \* Phone: 201-797-2718 \* Toll Free Phone: 800-631-0347  
Email: sales@totalcomp.com \* Website: www.totalcomp.com

# Specifications

## General Sensor

### GS1240-SS

Interchange for LOCOSC 7160 load cell. Stainless steel, 1/4-20 UNC mounting holes. 2 mv/v, 0.02% total error, 380/350 ohms, 1.5 m 6 cond cable, stainless steel, IP67.

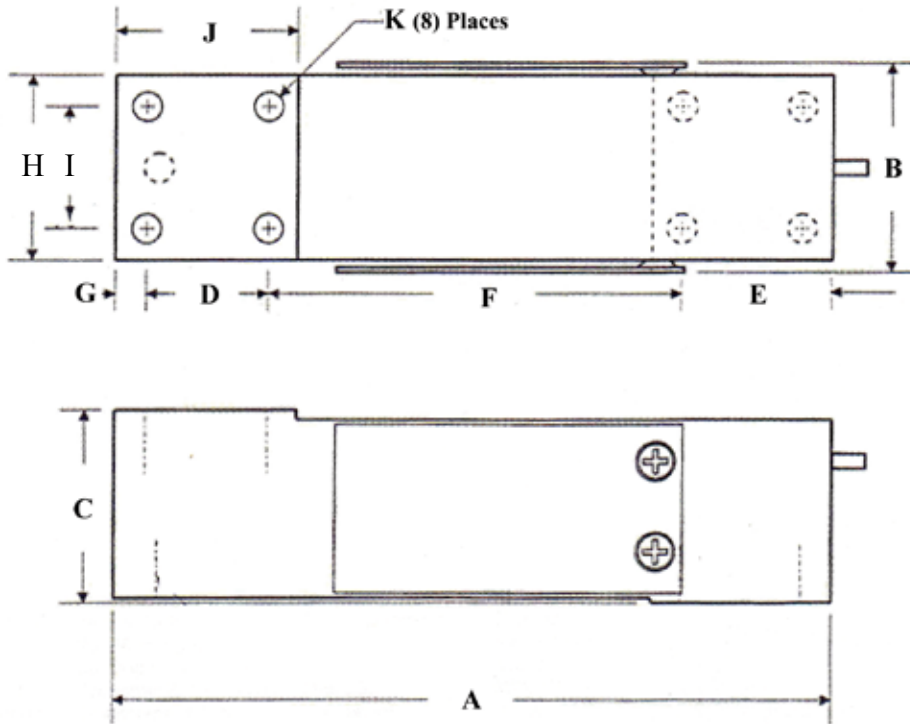

#### Dimensions in inches

Capacity	A	B	C	D	E	F	G	H	I	J	K
50kg-250kg	5.91	1.71	1.57	1.00	1.00	3.41	0.25	1.50	1.00	1.50	1/4-20

#### TOTALCOMP LIMITED WARRANTY

**Totalcomp** warrants this product to be free of defects in materials and/or workmanship and suitable for the purpose(s) intended as outlined on this sheet. This warranty is effective and shall cover the purchaser for one year from the date of shipment from our plant. If this product is found to be defective by our inspection in accordance with the above listed criteria, we will replace or repair in at our expense. For warranty service, please obtain a return authorization number from us and return the item, shipping prepaid, with a written description of the problem. We will respond promptly with the results of our evaluation.



**Scales & Components**

99 Reagent Lane  
 Fair Lawn, NJ 07410  
 Fax (201) 797-2287  
 Toll Free Fax (888) 797 2288  
 Phone (201) 797-2718  
 Toll Free Phone (800) 631-0347  
 Email [sales@totalcomp.com](mailto:sales@totalcomp.com)  
 Website [www.totalcomp.com](http://www.totalcomp.com)