


HD-SS

Scale Base

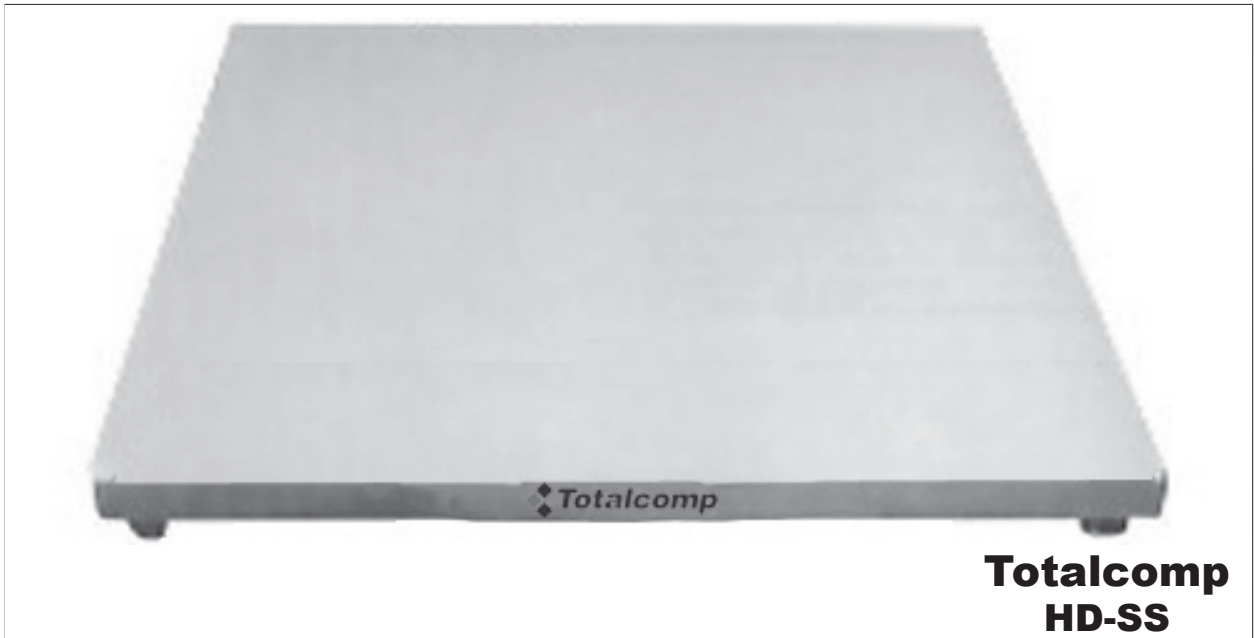

Stainless Steel Construction and High Capacities make this Heavy Duty Floor Scale base perfect for rugged applications.

- ✓ *Channeled construction.*
- ✓ *Washdown-safe.*
- ✓ *Stainless steel deck, load cells and j-box (NEMA 4X).*
- ✓ *Optional ramps.*
- ✓ *NTEP Approved.*
- ✓ *Capacities from 1,000 to 20,000 lbs.*
- ✓ *Smooth deck construction.*
- ✓ *Platform sizes from 2' x 2' to 5' x 7'.*



Totalcomp[®] Scales & Components

Totalcomp HD-SS Smooth Deck Construction Heavy Duty Stainless Steel Scale Base

The *Totalcomp* HD-SS Smooth Deck Construction Heavy Duty Stainless Steel Floor Scales are made from 304 stainless steel. This high capacity sturdy scale base features channeled construction for heavy usage. NTEP approved and completely washdown safe, this base includes stainless steel hermetically sealed load cells and NEMA 4X stainless steel junction box.

Part Number	Size	Capacity	Weight
T2x2-1K-SS	2' x 2' x 3"	1,000 lb	80 lb
T2x2-2K-SS	2' x 2' x 3"	2,000 lb	80 lb
T30x30-1K-SS	30" x 30" x 3"	1,000 lb	140 lb
T30x30-2K-SS	30" x 30" x 3"	2,000 lb	140 lb
T3x3-2K-SS	3' x 3' x 3"	2,000 lb	200 lb
T3x3-5K-SS	3' x 3' x 3"	5,000 lb	120 lb
T4x4-5K-SS	4' x 4' x 3"	5,000 lb	190 lb
T4x4-10K-SS	4' x 4' x 3"	10,000 lb	190 lb
T4x5-5K-SS	4' x 5' x 3"	5,000 lb	380 lb
T4x5-10K-SS	4' x 5' x 3"	10,000 lb	380 lb
T4x6-5K-SS	4' x 6' x 5"	5,000 lb	430 lb
T4x6-10K-SS	4' x 6' x 3"	10,000 lb	430 lb
T5x5-5K-SS	5' x 5' x 3"	5,000 lb	455 lb
T5x5-10K-SS	5' x 5' x 3"	10,000 lb	405 lb
T5x7-5K-SS	5' x 7' x 3"	5,000 lb	690 lb
T5x7-10K-SS	5' x 7' x 3"	10,000 lb	690 lb
T5x7-20K-SS*	5' x 7' x 5"	20,000 lb	1,630 lb

*Not NTEP

Construction Material
304 Stainless Steel

Load Cell Output
3 mv/v FS

Excitation
10 VDC/AC std. 20 VDC/AC max

Cable
15 foot, 4 conductor

Operating Temperature
+14 F to 122 F (-10 C to + 50 C)

Available Options
Stainless Steel Ramps
Hold Down Bracket
Indicator Column

TOTALCOMP LIMITED WARRANTY

Totalcomp warrants this product to be free of defects in materials and/or workmanship and suitable for the purpose(s) intended as outlined on this sheet. This warranty is effective and shall cover the purchaser for one year from the date of shipment from our plant. If this product is found to be defective by our inspection in accordance with the above listed criteria, we will replace or repair it at our expense. For warranty service, please obtain a return authorization number from us and return the item, shipping prepaid, with a written description of the problem. We will respond promptly with the results of our evaluation.



Totalcomp[®]

Scales & Components

99 Reagent Lane
Fair Lawn, NJ 07410

Fax (201) 797-2287

Toll Free Fax (888) 797-2288

Phone (201) 797-2718

Toll Free Phone (800) 631-0347

Email sales@totalcomp.com

Website www.totalcomp.com