# 2026

Issue date 15Sep2026

# Scales & Balances

Totalcomp

*The weigh you want... today*

# the weigh you want... *today!*

Dear Customer:

This catalog has been prepared especially for the professional in the weighing industry. I think that you will find it informative and helpful.

We pride ourselves on answering the phone on the first ring and shipping your order the same day that you place it. This is due to our huge inventory.

You can depend on our price being the best in the industry. If you have a need for a large quantity we can give you a better price.

Thank you for being our customer. We look forward to many successful years with you.

Best Personal Regards
Rudolph J. Kolaci
President


www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

## Mission
Serve, Supply, & Inform You with Totalcomp***etence***.

## Vision
Embrace Change While Maintaining Values.

## Values
*Honest* in all of our dealings.
*Helpful* to our customers & each other.
*Happy* in both home and office.
*Healthy* in all aspects of our lives.

To see current dealer pricing please go to ***www.Totalcomp.com*** and create an account.

After dealer approval, you will be able to order online as an authorized Totalcomp reseller.

Please feel free to call us at 800-631-0347 should you have any issues successfully registering.





13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

Totalcomp®
Scales & Balances

www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

# Compact

**PS**
**Compact Scale**

OHAUS®

## PS Compact scale

Unique pan design, durable ABS housing slides back to engage the load cell and expose the display and buttons for operation. Weighing units for g, oz, ozt, dwt. 0.3" LCD display. Text weight unit prompts with stability and overload indicators. Auto shut off to preserve battery. Cover protects display and keys and prevents load cell damage in transport. Smaller than most pocket scales, allows a comfortable fit in your pocket. Piano style mechanical buttons provide positive dependable operation. Includes calibration software using 100g weight for PS121 and 200g weight for PS251. Calibration weights are not included. Two CR2032 lithium batteries included. 1 year warranty.

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| PS121 | 120g x 0.1g | 2.8" x 2.5" | 1 lb | 2329 | $ 114.00 |
| PS251 | 250g x 0.1g | 2.8" x 2.5" | 1 lb | 2330 | 146.00 |



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp®
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

OHAUS®

## CX Compact scale

Compass offers a battery life of up to 1,000 continuous hours, allowing for uninterrupted operation. Featuring a slim, stackable and light-weight design, two-button operation. The Compass CX's large backlit display increases readability in dim lighting conditions.

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| CX221 | 220 x 0.1 g | 5” x 5.6” | 2 lb | 2876 | $ 246.00 |
| CX621 | 620 x 0.1 g | 5” x 5.6” | 2 lb | 2877 | 254.00 |
| CX1201 | 1,200 x 0.1 g | 5” x 5.6” | 2 lb | 2878 | 270.00 |
| CX2200 | 2,200 x 1.0 g | 5” x 5.6” | 2 lb | 2879 | 246.00 |
| CX5200 | 5,200 x 1.0 g | 5” x 5.6” | 2 lb | 2880 | 290.00 |
| **Models followed by the letter P include a postal chart** | | | | | |
| CX221P | 220 x 0.1 g | 5” x 5.6” | 2 lb | 2881 | 265.00 |
| CX2200P | 2,200 x 1.0 g | 5” x 5.6” | 2 lb | 2882 | 266.00 |
| CX5200P | 5,200 x 1.0 g | 5” x 5.6” | 2 lb | 2883 | 290.00 |
| **Culinary Scale** | | | | | |
| CX5200F | 5,200 x 1.0 g | 5” x 5.6” | 2 lb | 2884 | 333.00 |
| **Options** | | | | | |
| 30467763 Carrying Case | | | 2 lb | 2874 | 105.00 |
| 30330714 Adaptor 5v 1A US plug | | | 1 lb | 2740 | 42.00 |
| 12102565 Carat bowl XS aluminum | | | 1 lb | 2885 | 37.00 |
| 30020842 Carat bowl XS Gold | | | 1 lb | 1141 | 56.00 |

**CX Compact SCale**

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

# Compact

**CR**
**Compact scale**

OHAUS®

## CR Compass compact scale

Compass offers basic weighing functionality and competitive performanc., Features such as a slim, stackable design, and an enlarged weighing platform,perfect for a variety of portable weighing applications. Stack up to 4 scales.

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| CR221 | 220 x 0.1 g | 5” x 5.2” | 2 lb | 2870 | $ 177.00 |
| CR621 | 620 x 0.1 g | 5” x 5.2” | 2 lb | 2871 | 182.00 |
| CR2200 | 2,200 x 1.0 g | 5” x 5.2” | 2 lb | 2872 | 177.00 |
| CR5200 | 5,200 x 1.0 g | 5” x 5.2” | 2 lb | 2873 | 243.00 |
| **Options** | | | | | |
| 30467763 Carrying Case | | | 2 lb | 2874 | 105.00 |
| 30467987 Adaptor w/plugs(EU,US,UK,AU,KR) | | | 1 lb | 2875 | 65.00 |

**MH-200**
**Pocket scale**

Totalcomp

## MH Pocket scale

The best pocket scale on the market, extreme accuracy for an incredibly low price. Competitive units sell for $100 with a capacity of 100g x 0.01g. While this unit sells for $79.99 with a capacity of 200g x 0.01g. Accurate weight readings in a fraction of a second. Zero’s out in half the time of other units. Lightweight and portable. Can be stored in your pocket or backpack for easy transport. Perfect for jewelry, herbs, or anything you need to weigh up to 200g. (2) AAA batteries, included.

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| MH-200 | 200g x 0.01 g | 1.9” x 2.2” | 0.24 lb | 5294 | $ 9.99 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287



13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

A&D WEIGHING DIVISION

## HL Compact Scale

Use in a wide range of applications including office, warehouse, laboratory and industry. Keys for ON/OFF, UNITS, RE-ZERO. Liquid crystal display(LCD) can be selected to various weighing modes which can include g, lb oz. Self contained, battery operated by (6) AA batteries or an optional AC adapter 120 VAC, 50/60 Hz, 1.5 watts. Auto shut off after 5 minutes. 7.8"W x 5.51"D x 1.75"H
NTEP Legal for Trade (select models)

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| **Stainless Steel Full Washdown IP65 NEMA-4X** | | | | | |
| HL-300WP | 300 x 0.1g | 5" x 5" | 3 lb | 6617 | 555.00 |
| HL-1000WP | 1,000 x 0.5g | 5" x 5" | 3 lb | 6618 | 555.00 |
| HL-3000WP | 3,000 x 1g | 5" x 5" | 3 lb | 6619 | 585.00 |
| HL-3000WPN * | 3,000 x 1g | 5" x 5" | 3 lb | 6620 | 595.00 |
| HL-3000LWP | 3,000 x 1g | 5.4" x 6.8" | 4 lb | 6621 | 585.00 |
| HL-3000LWPN * | 3,000 x 1g | 5.4" x 6.8" | 4 lb | 6622 | 585.00 |

* N suffix does not have lb/oz mode and is NTEP

**Service Parts**

| | | | | |
|---|---|---|---|---|
| 04:3006434 SS pan 5" x 5" | 1 lb | 6676 | 24.38 |
| 07:4014219 adjustable foot | 1 lb | 6677 | 10.60 |

**HL-300WP**
**Stainless Steel Washdown**
**Compact Scale**

A&D WEIGHING DIVISION

## HLi Ninja Compact Scale

Portable, battery operated. Simple, easy to operate. Clear 0.53" 7 segment LCD display. Keys are: ON/OFF, UNITS, O/T/RE-ZERO. Units: g, oz, tl. HL-200i has additional units of g. Indicators are: low batt, weight stability, scale overload. 1,000 hours of battery life. Auto power off. 2 year warranty. Includes (4) AA batteries, optional AC adapter. 5.1"W x 7.6"D x 2"H

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| HL-200i | 200 x 0.1g | 5.1" dia | 2 lb | 5360 | $ 145.00 |
| HL-2000i | 2,000 x 1g | 5.1" dia | 2 lb | 5361 | 145.00 |

**Options**

| | | | | |
|---|---|---|---|---|
| TB:662 AC adapter 120 VAC | 1 lb | 1305 | 50.00 |
| FV-06 AC adapter 240VAC | 1 lb | 1306 | 65.00 |

**HL-200i**
**Compact Scale**

Prices are subject to change without notice. Please call for current prices.

Other items are available from the manufacturers, please call for prices.

# Bench

**HT-500**
**Bench Scale**

A&D WEIGHING DIVISION

## HT Compact Bench Scale

Engineered with simplicity in mind. Low profile and lightweight. Designed with portability and proctection. Unique to this scale are 3 included color bars that allow the user to categorize the scale by user or function. Choose one of the 3 color bars (red, green, orange) to personalize your scale. Clearly visible, 13.5mm high digital LCD display. Multiple units of measure for: g, oz, Troy oz, lb, lb-oz, N, tael, tola. Auto power off function to preserve battery life. 450 hour battery life (4AA batteries included). Standard plastic carrying case included that are stackable for easy storage. It is even possible to weigh on the scale as it rests in the case, no need to remove it. The case also comes with penholders for added convenience. Security slot in the rear of the scale can accommodate an anti-theft device. 7.68"W x 5.35"D x 1.73"H

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| HT-120 | 120 x 0.01g | 2.75" x 5.12" | 3 lb | 4228 | $ 345.00 |
| HT-300 | 310 x 0.1g | 5.20" x 5.12" | 3 lb | 4278 | 215.00 |
| HT-500 | 510 x 0.1g | 5.20" x 5.12" | 3 lb | 4279 | 215.00 |
| HT-3000 | 3,100 x 1g | 5.20" x 5.12" | 3 lb | 4280 | 215.00 |
| HT-5000 | 5,100 x 1g | 5.20" x 5.12" | 3 lb | 4281 | 215.00 |
| **Options** | | | | | |
| HT-10 Stainless steel pan | | 5.20" x 5.12" | 2 lb | 4290 | 40.00 |
| TB:662 AC adapter 120 VAC | | | 1 lb | 1305 | 50.00 |

**SJ-2000HS**
**Bench Scale**

A&D WEIGHING DIVISION

## SJ Bench Scale

Full digital calibration, large, removable stainless steel pan. Easy to read 1" 7 segment LCD display. Less than one second response. Keys for ON/OFF, RE-ZERO, UNITS. Weighing units are: g, oz, lb-oz, lb. 800 hour battery life. Battery level indicator. Automatic power off. Optional AC adapter (not included). 10.4"W x 9.8"D x 4.1"H.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| SJ-1000HS | 1,000 x 0.5g | 230 x 190mm | 4 lb | 4093 | $ 345.00 |
| SJ-2000HS | 2,000 x 1g | 230 x 190mm | 4 lb | 4096 | 345.00 |
| SJ-5000HS | 5,000 x 2g | 230 x 190mm | 4 lb | 4097 | 345.00 |
| SJ-5001HS | 5,000 x 1g | 230 x 190mm | 4 lb | 4036 | 360.00 |
| SJ-12KHS | 12,000 x 5g | 230 x 190mm | 4 lb | 4099 | 345.00 |
| SJ-20KHS | 20,000 x 10g | 230 x 190mm | 4 lb | 4094 | 365.00 |
| SJ-30KHS | 30,000 x 20g | 230 x 190mm | 4 lb | 4095 | 365.00 |
| **Options** | | | | | |
| TB:662 AC adapter 120 VAC | | | 1 lb | 1305 | 50.00 |
| **Service Parts** | | | | | |
| 07:4018232A foot for SJ old version | | | 1 lb | 5798 | 10.60 |
| 707:4018232 foot for SJ w/rubber insert | | | 1 lb | 5883 | 10.60 |
| 07:3008539 battery cover for SJ | | | 0.03 lb | 5886 | 10.60 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

A&D WEIGHING DIVISION

## EK-i Bench Scale

1/30,000 resolution and a complete range of features from a scale portable enough to carry in one hand. Gram, oz(avoir), oz(troy), lb, grain, carat, momme, tael, pennyweight, counting function, Percentage Function. Includes RS232C interface to communicate with computers and printers. Includes AC adapter. 115VAC, 50/60 Hz, 2.5VA, 7.5"W x 8.6"D x 2.6"H.
NTEP Legal for Trade 04-019 Class III & II

**EK-12Ki Bench Scale**

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| EK-120i* | 120 x 0.01g | 4.3"dia | 4 lb | 5647 | $ 665.00 |
| EK-200i* | 200 x 0.01g | 4.3"dia | 4 lb | 5648 | 715.00 |
| EK-300*i | 300 x 0.01g | 4.3"dia | 4 lb | 5649 | 745.00 |
| EK-410i* | 400 x 0.01g | 4.3"dia | 4 lb | 5226 | 835.00 |
| EK-610i* | 600 x 0.01g | 4.3"dia | 4 lb | 5227 | 985.00 |
| EK-600i | 600 x 0.1g | 5.2" x 6.7" | 5 lb | 5650 | 665.00 |
| EK-1200i | 1,200 x 0.1g | 5.2" x 6.7" | 5 lb | 5651 | 630.00 |
| EK-2000i* | 2,000 x 0.1g | 5.2" x 6.7" | 5 lb | 5652 | 745.00 |
| EK-3000i* | 3,000 x 0.1g | 5.2" x 6.7" | 5 lb | 5653 | 785.00 |
| EK-4100i* | 4,000 x 0.1g | 5.2" x 6.7" | 5 lb | 5228 | 955.00 |
| EK-6100i* | 6,000 x 0.1g | 5.2" x 6.7" | 5 lb | 5229 | 1,140.00 |
| EK-6000i | 6,000 x 1g | 5.2" x 6.7" | 5 lb | 5654 | 745.00 |
| EK-12Ki | 12,000 x 1g | 5.2" x 6.7" | 5 lb | 5655 | 915.00 |

* Not NTEP

**Options**

| | | | | |
|---|---|---|---|---|
| EKW-04i Comparator/Relay output/Buzzer | 1 lb | 5656 | 220.00 |
| EKW-07i Underhook for EK-6000i & 12Ki | 1 lb | 5657 | 70.00 |
| EKW-09i Rechargeable NiCd battery pack | 4 lb | 5658 | 280.00 |
| AX: 3005824-5S Protective in use cover | 1 lb | 5231 | 13.78 |
| EJ-12 Carry case for EW/EK-i | 2 lb | 7555 | 80.00 |
| AD-100-2 Anti theft device | 1 lb | 1849 | 105.00 |

**Service Parts**

| | | | |
|---|---|---|---|
| TB:662 AC adapter 120VAC | 1 lb | 1305 | 50.00 |
| 06:4011084B-2 foot EK EW EJ | 1 lb | 6176 | 10.60 |
| 04:4007526 pan 5.2"x6.7" | 1 lb | 5614 | 46.64 |
| 07: A46041A adjustable foot EKA EKG EWG EWH | 1 lb | 6184 | 16.28 |
| 07:4000316 display filter EK EW | 0.02 lb | 6311 | 10.60 |
| 08:3005577 keysheet EKI | 0.02 lb | 6312 | 29.68 |

A&D WEIGHING DIVISION

## EK (Old) Bench Scale

Old Series parts only.

| Part Number | Weight | SKU | List |
|---|---|---|---|
| **Old Version Service Parts** | | | |
| 01:A33711-2A keysheet EK-1200A | 1 lb | 1503 | $ 28.00 |
| 01:A33744 keysheet for EK-12KA | 1 lb | 1956 | 31.00 |
| PZ:690 Pushbutton assy for EK/EW Series | 1 lb | 18 | 39.00 |
| AX:00A20559A protective dust cover for EK/EW 120/1200 | 1 lb | 1674 | 12.00 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.

# Bench



## Totalcomp

### T29 Washdown Bench Scale

**T29**
**Washdown Bench Scale**

Stainless steel housing with steel case, locks out water, dust and dirt. Portable. Washdown with breathable knob design. Designed to withstand a variety of harsh conditions found in commercial and industrial facilities (tighten knob for complete seal). Large 25mm LCD display with white LED backlight make this scale easy to read. Keys for ON/OFF, TARE, ZERO. Indicators for Zero, Stable, Net, Battery, kg, lb, charging LED light. Adjustable feet and front bubble level makes it easy to level this scale. 6V/3.2Ah rechargeable battery included. Battery provides up to 70 hours of continuous use (without backlight). 12V/500mA AC adapter included. Operating temperature -10 C to +40 C. IP67. 9.5"W x 11.75"D x 5"H.

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| T29-6 lb | 6 x 0.001 lb | 7.5" x 9.0" | 10 lb | 7982 | $ 525.75 |
| T29-24 lb | 24 x 0.005 lb | 7.5" x 9.0" | 10 lb | 7984 | 525.75 |
| **Options** | | | | | |
| AC Adapter 12VDC | | | 1 lb | 6362 | 34.84 |
| **Service Parts** | | | | | |
| Main board for T29 | | | 1 lb | 7592 | 252.89 |
| 110200050 battery for T29 6v/3.2a | | | 1.42 lb | 7366 | 27.83 |

## A&D WEIGHING DIVISION

### EW-i Bench Scale

**EW-1500i**
**Bench Scale**

The EW-i Series scales offer attractive triple ranges at an even more economical price. Weighing modes include gram(g), decimal ounce(oz), decimal pound(lb), troy ounce(ozt), pennyweight(dwt), carat(ct), Momme(mm), Grain Unit(GU), tael(tl), percentage and counting functions. Includes RS-232C interface for connecting computers and printers. Includes AC adapter, 115 VAC 50/60 Hz, 2.5 VA, 7.5"W x 8.6"D x 2.2"H.
NTEP Legal for Trade 04-019 Class III

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| EW-150i * | 30g x 0.01g<br>60g x 0.02g<br>150g x 0.05g | 4.3" dia | 4 lb | 5644 | $ 560.00 |
| EW-1500i | 300g x 0.1g<br>600g x 0.2g<br>1,500g x 0.5g | 5.2" x 6.7" | 5 lb | 5645 | 560.00 |
| EW-12Ki | 3,000g x 1g<br>6,000g x 2g<br>12,000g x 5g | 5.2" x 6.7" | 5 lb | 5646 | 560.00 |

* Not NTEP

| | | | |
|---|---|---|---|
| **Options** | | | |
| EKW-04i Comparator/Relay output/Buzzer | 1 lb | 5656 | 220.00 |
| EKW-07i Underhook for EK-6000i & 12Ki | 1 lb | 5657 | 70.00 |
| EKW-09i Rechargeable NiCd battery pack | 4 lb | 5658 | 280.00 |
| AX: 3005824-5S Protective in use cover | 1 lb | 5231 | 13.78 |
| EJ-12 106 Carry case for EW/EK-i | 2 lb | 7555 | 80.00 |
| AD-100-2 Anti theft device | 1 lb | 1849 | 105.00 |
| **Service Parts** | | | |
| TB:662 AC adapter 120VAC | 1 lb | 1305 | 50.00 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287



13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

A&D WEIGHING DIVISION

## SK-WPF Water Proof Bench Scale

Stainless steel, rugged, high impact housing. Detachable stainless steel weighing pan. Large & clear LCD display 25mm high. Portable with (6) D size batteries (not included). Approx. 600 hours (manganese type), 1,200 hours (alkaline). Indicators for Stable. Net, Zero and Low battery. Keys for ON/OFF, ZERO, TARE. Auto power off function. SK-Z is LB w/decimal oz, fractional oz, decimal lb. Optional AC adapter (not included).
10.5"W x 11"D x 5.75"H.
NTEP Legal for Trade 98-086 Class III,
NSF pending

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| SK-1000WPF | 1,000 x 0.5g | 232 x 192mm | 8 lb | 2936 | $ 575.00 |
| SK-2000WPF | 2,000 x 1g | 232 x 192mm | 8 lb | 2937 | 595.00 |
| SK-5000WPF | 5,000 x 2g | 232 x 192mm | 8 lb | 2938 | 595.00 |
| SK-5001WPF | 5,000 x 1g | 232 x 192mm | 8 lb | 2939 | 595.00 |
| SK-10KWPF | 10kg x 0.005kg | 232 x 192mm | 8 lb | 2940 | 575.00 |
| SK-20KWPF | 20kg x 0.01kg | 232 x 192mm | 10 lb | 2941 | 605.00 |
| **Options** | | | | | |
| TB:662 AC adapter 120 VAC | | | 1 lb | 1305 | 50.00 |
| FV-06 AC adapter 220 VAC | | | 1 lb | 1306 | 65.00 |
| **Service Parts** | | | | | |
| 08:3005664A Keypad overlay for SK2000WPF | | | 1.lb | 3028 | 12.72 |
| 07:2000638 battery cover SKWPF | | | 1 lb | 2935 | 21.20 |
| PZ:4334 main board SKWPF | | | 1 lb | 2947 | 145.22 |
| 07:4011266A adjustable foot | | | 0.05 lb | 2986 | 10.60 |
| **Load cells** | | | | | |
| LC:121-2000WP for SK1000WPF,SK2000WPF | | | 1.lb | 2888 | 130.38 |
| LC:121-10KWP for SK5000WPF,SK5001WPF, and SK10KWPF | | | 1.lb | 2889 | 130.38 |
| LC:121-20KWP for SK20KWPF | | | 1.lb | 2890 | 130.38 |

**SK-WP Bench Scale**

A&D WEIGHING DIVISION

## FV + FW Portable Bench/Floor Scale

Service parts only.
HV: NTEP Legal for Trade 96-186 III 3,100 div Canadian SWA# AM-5093

| Part Number | Weight | SKU | List |
|---|---|---|---|
| **Service parts (Old Units FV & FW)** | | | |
| 01A Wall mounting kit for display pod(FV/FW) | 1 lb | 1268 | $ 45.00 |
| 02 Display pod extension cable 5m | 1 lb | 1302 | 145.95 |
| 09:A34157-7 Keysheet unit for FV | 1 lb | 1495 | 97.65 |
| 06:A33710-1A rubber cushion small for FV | 1 lb | 1462 | 17.85 |
| 06:A33710-2A rubber cushion large for FV | 1 lb | 1463 | 21.00 |

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

# Bench



A&D WEIGHING DIVISION

## EJ Bench Scale

**EJ-200**

Ten different capacities cover a broad range of applications for your user requirements. Easy to read, 16mm high LCD display with amber backlight allows for easy viewing in the worst conditions. Fast, 1 second response time. Keys for: ON/OFF, SAMPLE, PRINT, OT/RE-ZERO, PRINT. Weighing units are: grams, ounces, pounds, troy ounces, carats, momme, pennyweight, grains, newtons, tael. Counting mode with Automatic Counting Accuracy Improvement (ACAI). Percent weighing. Specific gravity function. Over-Under. Stackable ( up to 3 high) for easy storage and retrieval. 5 year warranty.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| EJ-54D2 | 22g x 0.0002g<br>52g x 0.001g | 1.96” | 3 lb | 7670 | $ 875.00 |
| EJ-123 | 120g x 0.001g | 4.3” | 4 lb | 7626 | 630.00 |
| EJ-303 | 300g x 0.001g | 4.3” | 4 lb | 7624 | 720.00 |
| EJ-120 | 120g x 0.01g | 4.3” | 4 lb | 7540 | 350.00 |
| EJ-200 | 200g x 0.01g | 4.3” | 4 lb | 7541 | 455.00 |
| EJ-300 | 300g x 0.01g | 4.3” | 4 lb | 7542 | 520.00 |
| EJ-410 | 410g x 0.01g | 4.3” | 4 lb | 7543 | 585.00 |
| EJ-610 | 610g x 0.01g | 4.3” | 4 lb | 7544 | 675.00 |
| EJ-1202 | 1,200g x 0.01g | 5” x 5.5” | 6 lb | 7671 | 740.00 |
| EJ-3002 | 3,100g x 0.01g | 5” x 5.5” | 6 lb | 7672 | 795.00 |
| EJ-1500 | 1500g x 0.1g | 5” x 5.5” | 6 lb | 7545 | 370.00 |
| EJ-2000 | 2100g x 0.1g | 5” x 5.5” | 6 lb | 7546 | 435.00 |
| EJ-3000 | 3100g x 0.1g | 5” x 5.5” | 6 lb | 7547 | 535.00 |
| EJ-4100 | 4100g x 0.1g | 5” x 5.5” | 6 lb | 7548 | 585.00 |
| EJ-6100 | 6100g x 0.1g | 5” x 5.5” | 6 lb | 7549 | 675.00 |
| **Options** | | | | | |
| EJ-02C USB interface w/ cable | | | 1 lb | 7550 | 125.00 |
| EJ-03C RS232 interface w/ cable | | | 1 lb | 7551 | 110.00 |
| EJ-07 Underhook for EJ 3K, 4.1K, 6.1K | | | 1 lb | 7552 | 90.00 |
| EJ-08 Underhook for EJ 1500 and 2000 | | | 1 lb | 7553 | 90.00 |
| EJ-11 Breeze break | | | 1 lb | 7554 | 90.00 |
| EJ-12 Carry case | | | 1 lb | 7555 | 80.00 |
| EJ-13 Density determination kit | | | 1 lb | 7556 | 110.00 |
| **Service Parts** | | | | | |
| TB:662 adapter 120 VAC | | | 1 lb | 1305 | 50.00 |
| 06:4011084B-2 foot EK EW EJ | | | 1 lb | 6176 | 10.60 |

**EJ-2000**

A&D WEIGHING DIVISION

## EK-G Bench Scale



**EK-120G**
**Service Parts only**

Service Parts only for A&D EK-G.

| Part Number | Weight | SKU | List |
|---|---|---|---|
| **Service parts** | | | |
| TB:102 AC adapter 120 VAC for EW/EK | 1 lb | 986 | $ 48.00 |
| TB:119 AC adapter 220 VAC for EW/EK | 1 lb | 674 | 65.00 |
| 08:3000113 Keysheet for EK-G | 1 lb | 3138 | 29.40 |
| SK:SKHHAK Pushbutton switch individual | 1 lb | 3139 | 10.60 |
| 07:3001151 Protective covers for EW/EK | 1 lb | 3140 | 15.75 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287



13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

A&D WEIGHING DIVISION

## SK Bench Scale

1/2,000 resolution, solid & reliable design, splash proof (driptight), large & clear LCD display 25mm high, large stainless steel pan. Portable with (6) D size batteries (not included). Indicators for Stable. Net, Zero and Low battery. Keys for ON/OFF, ZERO, TARE. Auto power off function. SK-Z is LB w/decimal oz, fractional oz, decimal lb. Optional AC adapter (not included). 244mm x 232mm x 137mm.
USDA Approved
NTEP Legal for Trade 98-086 Class III, CSA

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| **Dual Display** | | | | | |
| SK-5000D | 11 lb x 0.005 lb | 230 x 190mm | 9 lb | 5541 | 330.00 |
| **Options** | | | | | |
| TB:662 AC adapter 120 VAC | | | 1 lb | 1305 | 50.00 |
| FV-06 AC adapter 220 VAC | | | 1 lb | 1306 | 6500 |
| **Service Parts** | | | | | |
| PZ:3006 main board for SK (specify capacity) | | | 1 lb | 3251 | 105.00 |
| 07:4003338 plastic foot | | | 1 lb | 3269 | 10.50 |
| 08:4003781 keysheet | | | 1 lb | 3270 | 6.30 |

**SK-5001***
**Bench Scale**

A&D WEIGHING DIVISION

## SJ Bench Scale

Bright and Multi-Colored 5-Step LED Comparator Lights Externally mounted load cell to realize fast stabilization (0.5 seconds), IP67 Dust and Waterproof Construction, Large LCD digits (26 mm height) with white backlight that provides excellent visibility in dim light, Unparalleled, 5000-hour continuous operation with normal batteries, Key lock function to prevent operators from making unwanted changes to the scale settings, Auto power OFF function to avoid wasting power when the scale is inactive for a set period (5 to 60 minutes) of time, Four selectable weighing resolutions: 1/3,000,1/6,000 (or 1/7,500), 1/12,000 (or 1/15,000), and 1/30,000 Multiple weighing units: gram, kilogram, pound, ounce, troy ounce, pound-ounce, tael (Singapore/HK jewelry/Taiwan), tola, and Newton Counting mode to count a number of small pieces of the same weight instantly and precisely, Scratch-free and hygienic stainless steel (SUS304) weighing pan, Removable, transparent pan support with overhanging panels to shield the load cell Waterproof and anti-corrosive load cell with integrated overload protection mechanism, Counting mode function, Auto power OFF function, Battery life indicator

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| SJ-3000WP | 6 lb x 0.001 lb | 9 lb | 2059 | 655.00 |
| SJ-6000WP | 13 lb x 0.002 lb | 9 lb | 2060 | 655.00 |
| SJ-15KWP | 33 lb x 0.005 lb | 9 lb | 2061 | 695.00 |
| SJ-30KWP | 66 lb x 0.01 lb | 9 lb | 2062 | 670.00 |
| **Service Parts** | | | | |
| Plastic pan SJ-WP | | 0.26 lb | 2164 | 21.20 |
| 1072002653A battery cover for SJ-WP | | 0.03 lb | 5887 | 15.90 |

**SJ-WP**

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.

# Bench

**ABW Aqua**
**Washdown bench**

## ABW Aqua washdown bench

ABW washdown scales are IP67 rated and feature a large **stainless steel** weighing pan and solid ABS housing. They are protected for water immersion up to one meter deep. The Aqua is suitable for applications that require frequent and repetitive cleaning. Dual displays are front facing and rear facing LED displays 0.8" high. Check weighing has LED color changing indicators which will show if the weight is HI LOW or OK compared to preset limits. Percentage weighing and parts counting function are available for the operator to use. Keys for Power ON/OFF, ZERO, TARE, UNITS. Power is supplied using the included AC adapter or the built in rechargeable battery with 55 hours of continual use. 10"W x 11.4"D x 4.1"H. IP67

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| ABW4 | 9 x 0.001 lb | 9.6" x 7.1" | 5.5 lb | 1963 | $ 500.00 |
| ABW8 | 15 x 0.002 lb | 9.6" x 7.1" | 5.5 lb | 1964 | 500.00 |
| ABW16 | 32 x 0.005 lb | 9.6" x 7.1" | 5.5 lb | 1965 | 500.00 |
| ABW32 | 70 x 0.01 lb | 9.6" x 7.1" | 5.5 lb | 1966 | 500.00 |

**LBX**
**Bench/Floor Scale**

## LBX Component Bench Scale

With inuitive operation, Latitude compact bench scales deliver excellent value for quick, basic weighing, checkweighing, and counting needs. Latitude compact bench scales deliver an excellent value for weighing, checkweighing, percentage weighing, and counting. With easy operation, Latitude is ideal for production, warehouse, or field use, as it is powered by the included AC adapter or internal rechargeable battery. The battery operates for 240 hours, so there are no worries about losing power. For added flexibility and convenience, Latitude can be charged using any USB power source, such as the USB connection in a vehicle or external USB power banks.

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| LBX 3 | 6 x 0.001 lb | 9.6" x 7.1" | 6 lb | 517 | $ 305.00 |
| LBX 6 | 12 x 0.002 lb | 9.6" x 7.1" | 6 lb | 518 | 305.00 |
| LBX 12 | 25 x 0.005 lb | 9.6" x 7.1" | 6 lb | 519 | 305.00 |
| LBX 30 | 65 x 0.01 lb | 9.6" x 7.1" | 16 lb | 520 | 305.00 |

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp®
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

CAS CORPORATION

## ED Bench Scale

Multi function scale, battery operated. LCD display with backlight. Dual range for improved accuracy. Counting and percentage, accumulation. Comparison HI/OK/LO with alarm beeps. lb/oz/kg/g switchable with front panel key. Soft touch keys for ON/OFF, ZERO, TARE, MODE, PRINT, SAMPLE, *, SET. Indicators for ZERO, NET, STABLE, LOW BATTERY. 170 hour operating time with rechargeable battery, included. Battery saver mode with auto off. A/C adapter, included. 120 VAC. **Stainless Steel** platform size 12" x 8.75". Overall size 13"W x 13"D x 4.2"H. RS232 output for printer.
NTEP Legal for Trade 09-072

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| ED-6LB | 3x0.001 lb/6x 0.002 lb | 13 lb | 988 | $ 325.00 |
| ED-15LB | 6x0.002 lb/15x0.005 lb | 13 lb | 989 | 325.00 |
| ED-30LB | 15x0.005 lb/30x0.01 lb | 13 lb | 990 | 406.00 |
| ED-60LB | 30x0.01 lb/60x0.02 lb | 13 lb | 991 | 325.00 |
| **Options** | | | | |
| TM-U295 Ticket Printer w/power supply | | 8 lb | 2225 | 770.00 |

**ED**
**Bench Scale**

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

# Bench

**SW-10RS**
**POS Interface**

## CAS CORPORATION

### SW-RS POS Interface Bench Scale

Compact, use where space is limited. Stainless steel platter. Large easy to read 1", 5 digit LCD display. Customer rear display. Soft touch tactile keyboard. Keys for ZERO, TARE, UNIT, POWER. Indicators for Stable, Zero, Net, Batt. Lg, g, kg, switchable. RS-232 interface. DC 9V. AC adapter included. Auto power off. 1 year warranty.
10.23"W x 11.29"D x 5.39"H
NTEP Legal for Trade 99-002 III 2,500 div

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| SW-10RS | 10 x 0.005 lb | 9.05" x 7.48" | 10 lb | 2696 | $ 486.00 |
| SW-20RS | 20 x 0.01 lb | 9.05" x 7.48" | 10 lb | 2697 | 486.00 |
| **Options** | | | | | |
| WS13 Serial cable | | | 1 lb | 2215 | 18.00 |
| **Service Parts** | | | | | |
| ZS11 Battey Cover | | | 0.25 lb | 7616 | 11.00 |
| TS13 SS tray for SW-10, SW-20, SW-50 | | | 0.57 lb | 7628 | 42.80 |

**SW-20Z**
**Bench scale**

## CAS CORPORATION

### SW-Z Bench Scale

The SW-Z features lb:oz displayed as fractions or decimals. 5 digit, 1 inch high LCD display. Keys for ON/OFF, TARE, UNIT, ZERO. Indicators for Stable, Zero, Net, Battery. Dual range technology. (6) D size batteries not included. AC adapter included.
10.2"W x 11.3"D x 5.4"H.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| SW-5Z | 5 x 0.002 lb | 9.05" x 7.48" | 10 lb | 6349 | $ 249.00 |
| SW-10Z | 10 x 0.005 lb | 9.05" x 7.48" | 10 lb | 6351 | 249.00 |
| SW-20Z | 20 x 0.01 lb | 9.05" x 7.48" | 10 lb | 6352 | 249.00 |
| SW-50Z | 50 x 0.02 lb | 9.05" x 7.48" | 10 lb | 6353 | 249.00 |
| **Service Parts** | | | | | |
| ZS25 battery | | | 2 lb | 7508 | 48.00 |
| TS14 SS tray for SW-5 | | | 0.57 lb | 7413 | 42.80 |
| TS13 SS tray for SW-10, SW-20, SW-50 | | | 0.57 lb | 7628 | 42.80 |
| TS11 platter, plastic (all capacities) | | | 0.43 lb | 7668 | 29.00 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.


www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp®
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

CAS CORPORATION

## SW Bench Scale

Digital scale, **Stainless Steel** platform, battery operated, lb/kg/g/oz switchable with front panel key. Soft touch keys for ON/OFF, ZERO, TARE, UNIT. Large 1" LCD display. Indicators for ZERO, NET, STABLE, LOW BATTERY. 1,000 hour operating time with (6) D alkaline batteries (not included). Includes A/C adapter 120 VAC, 50/60 Hz, 0.25 watts. Overall size 10.23"W x 11.29"D x 5.39"H.
NTEP Legal for Trade 99-002 III 2,500 div

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| SW-5 | 5 lb x 0.002 lb | 9.05" x 7.48" | 10 lb | 1791 | $ 249.00 |
| SW-10 | 10 lb x 0.005 lb | 9.05" x 7.48" | 10 lb | 1792 | 249.00 |
| SW-20 | 20 lb x 0.01 lb | 9.05" x 7.48" | 10 lb | 1793 | 249.00 |
| SW-50 | 50 lb x 0.02 lb | 9.05" x 7.48" | 10 lb | 1794 | 249.00 |
| **Options** | | | | | |
| AC adapter 120 VAC for SW | | | 1 lb | 1731 | 42.85 |
| CS11 In use cover for SW-10, SW-20, SW-50 | | | 1 lb | 1740 | 19.00 |
| **Service Parts** | | | | | |
| LS11 load cell SW-5 | 2kg | | 1 lb | 124 | 88.00 |
| LS12 load cell SW-10 | 5kg | | 1 lb | 125 | 88.00 |
| LS13 load cell SW-20 | 10kg | | 1 lb | 126 | 88.00 |
| LS14 load cell SW-50 | 20kg | | 1 lb | 127 | 88.00 |
| KS11 keypad for SW | | | 0.04 lb | 212 | 15.00 |
| ZS11 battery cover | | | 0.25 lb | 7616 | 11.00 |
| PS13 main board for SW | | | 0.26 lb | 7655 | 97.14 |
| TS14 SS tray for SW-5 | | | 0.57 lb | 7413 | 42.80 |
| TS13 SS tray for SW-10, SW-20, SW-50 | | | 0.57 lb | 7628 | 42.80 |
| TS11 platter, plastic (all capacities) | | | 0.43 lb | 7668 | 29.00 |

**SW-20**
**Bench Scale**

CAS CORPORATION

## SW-1W Washdown Bench Scale

The SW-1W is protected from water, dirt and other external agents (IP66). 5 digit, 1 inch high LCD display. Weighing units in: lb, oz, kg, g. Keys for ON/OFF, TARE, UNIT, ZERO. Indicators for Stable, Zero, Net, Battery. Dual range technology. (6) D size batteries not included. AC adapter included.
NTEP Legal for Trade 99-002 III 2,500 div

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| SW-1W10DD | 10 x 0.005 lb | 9.75"x7.75" | 10 lb | 6340 | $ 361.00 |
| SW-1W20DD | 20 x 0.01 lb | 9.75"x7.75" | 10 lb | 6341 | 361.00 |
| SW-1W50DD | 50 x 0.02 lb | 9.75"x7.75" | 10 lb | 6342 | 361.00 |
| **Service Parts** | | | | | |
| ZS11 battery cover | | | 1 lb | 7616 | 11.00 |
| TS13 SS tray for SW-1W (all capacities) | | | 0.57 lb | 7628 | 42.80 |
| TS11 platter, plastic (all capacities) | | | 0.43 lb | 7668 | 29.00 |

**SW-W**
**Washdown Bench Scale**

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.

# Bench

**Ranger 3000**
**Compact Bench Scale**

OHAUS®

## Ranger 3000 Compact Bench Scale

Ranger 3000 has an ABS housing and a stainless steel platform. Compact basic bench scale with large bright backlit LCD display. Checkweighing LED with 3 colors for over/under/ok. Applications for: weighing, Percent Weighing, Parts Counting, Checkweighing, Checkcounting, Checkpercent, Accumulation, Dynamic Weighing/Display Hold, Weigh below (hook included). Weighing units: lb/kg/g/oz/lb:oz Communication port included RS232, USB or Ethernet available as an option. Powered by AC adapter and batterty (included) 210 hours of battery life with continuous use.
NTEP Legal for Trade 13-022A1
Canada AM-5907C

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| R31P1502 | 3 x 0.0001 lb | 8.9” x 11.8” | 12 lb | 8016 | $ 1,026.00 |
| R31P3 | 6 x 0.0002 lb | 8.9” x 11.8” | 12 lb | 8017 | 1,026.00 |
| R31P6 | 15 x 0.0005 lb | 8.9” x 11.8” | 12 lb | 8018 | 1,026.00 |
| R31P15 | 30 x 0.001 lb | 8.9” x 11.8” | 12 lb | 8019 | 1,026.00 |
| R31P30 | 60 x 0.002 lb | 8.9” x 11.8” | 12 lb | 8020 | 1,026.00 |
| **Options** | | | | | |
| 30037447 Ethernet kit | | | 1 lb | 7968 | 245.00 |
| 30037448 RS232 kit | | | 1 lb | 7969 | 245.00 |
| 30037449 USB kit | | | 1 lb | 3819 | 245.00 |
| 30064203 SF40A Dot Matrix printer, includes RS232 cable | | | 2 lb | 1754 | 1,552.00 |
| 80500525 Cable to IBM 9 pin serial | | | 1 lb | 3047 | 304.00 |
| 80850080 WinWedge software | | | 1 lb | 2436 | 837.00 |
| **Service Parts** | | | | | |
| 71168359 battery pack | | | 3 lb | 6506 | 114.00 |
| 7220232 line cord | | | 1 lb | 6507 | 39.00 |
| 30656204 in use cover for R31P | | | 1 lb | 6522 | 56.00 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.


www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

OHAUS®

## SPX STX Scout Portable Bench Scale

Setting new standards in laboratory and industrial weighing. Bright Backlit LCD. Keys for: ZERO/PRINT/UNITS/FUNCTION/MODE/TARE/MENU. Weighing Units for: g, kg, ct, N, oz, ozt, dwt, lb, ln:oz, grn. Application modes: Weighing, Parts Counting, Percent Weighing, Check Weighing, Totalization, Display Hold. Draft shield. Weigh below hook. Lockswitch. Security slot. Connectivity. RS232, USB host, USB device, Ethernet. AC adapter (included) or (4) AA batteries (not included). 11.8" x 9.8" x 4.1" (SPX123/SPX223) 11.8" x 9.8" x 3.4" (SPX222, 422, 622, 1202, 2202, 421, 621, 2201, 6201, 8200). 2 year warranty.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| **Push Button** | | | | | |
| SPX123 | 120 x 0.001g | 3.7" | 4 lb | 8173 | $ 1,036.00 |
| SPX223 | 220 x 0.001g | 3.7" | 4 lb | 8174 | 1,157.00 |
| SPX222 | 220 x 0.01g | 4.7" | 4 lb | 8175 | 752.00 |
| SPX422 | 420 x 0.01g | 4.7" | 4 lb | 8176 | 1,056.00 |
| SPX622 | 620 x 0.01g | 4.7" | 4 lb | 8177 | 1,238.00 |
| SPX1202 | 1,200 x 0.01g | 6.7" x 5.5" | 4 lb | 8178 | 1,412.00 |
| SPX2202 | 2,200 x 0.01g | 6.7" x 5.5" | 4 lb | 8179 | 1,588.00 |
| SPX421 | 420 x 0.1g | 4.7" | 4 lb | 8180 | 416.00 |
| SPX621 | 620 x 0.1g | 6.7" x 5.5" | 4 lb | 8181 | 615.00 |
| SPX2201 | 2,200 x 0.1g | 6.7" x 5.5" | 4 lb | 8182 | 788.00 |
| SPX6201 | 6,200 x 0.1g | 6.7" x 5.5" | 4 lb | 8183 | 1,285.00 |
| SPX8200 | 8,200 x 1g | 6.7" x 5.5" | 4 lb | 8184 | 643.00 |
| **Touch Screen** | | | | | |
| STX123 | 120 x 0.001g | 3.7" | 4 lb | 8185 | 1,176.00 |
| STX223 | 220 x 0.001g | 3.7" | 4 lb | 8186 | 1,318.00 |
| STX222 | 220 x 0.01g | 4.7" | 4 lb | 8187 | 867.00 |
| STX422 | 420 x 0.01g | 4.7" | 4 lb | 8188 | 1,211.00 |
| STX622 | 620 x 0.01g | 4.7" | 4 lb | 8189 | 1,419.00 |
| STX1202 | 1,200 x 0.01g | 6.7" x 5.5" | 4 lb | 8190 | 1,621.00 |
| STX2202 | 2,200 x 0.01g | 6.7" x 5.5" | 4 lb | 8191 | 1,809.00 |
| STX421 | 420 x 0.1g | 4.7" | 4 lb | 8192 | 491.00 |
| STX621 | 620 x 0.1g | 6.7" x 5.5" | 4 lb | 8193 | 734.00 |
| STX2201 | 2,200 x 0.1g | 6.7" x 5.5" | 4 lb | 8194 | 928.00 |
| STX6201 | 6,200 x 0.1g | 6.7" x 5.5" | 4 lb | 8195 | 1,467.00 |
| STX8200 | 8,200 x 1g | 6.7" x 5.5" | 4 lb | 8196 | 761.00 |
| **Options** | | | | | |
| 30269021 carry case | | | 1 lb | 1988 | 206.00 |
| 30268988 stacking kit storage cover | | | 1 lb | 1969 | 38.00 |
| **Service Parts** | | | | | |
| 30330714 AC adapter w/plug SPX/STX | | | 1 lb | 2740 | 42.00 |
| 30268984 USB device interface | | | 1 lb | 5325 | 185.00 |
| 30268982 RS232 | | | 1 lb | 1675 | 262.00 |
| 30301950 foot adjustable, pack(4) | | | 1 lb | 1034 | 36.00 |
| 71160346 function label SP202 | | | 1 lb | 6059 | 41.00 |
| 83033644 SP pan support, rect pan set of (4) | | | 0.03 lb | 6014 | 58.00 |

**SPX**
**Push Button**
**Portable Bench Scale**

**STX**
**Touch Screen**
**Portable Bench Scale**

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

# Bench

**Ranger 4000 Bench Scale**

## Ranger 4000 Bench Scale

Portable with die-cast metal housing with slip-resistant rubber feet and a recharagable lead acid battery that can provide power for up to 100 hours. A bright LED display makes the scale usable even in dim conditions. SmarText software makes scale setup and use very simple. Standard RS232 with optional Ethernet, second RS232 and USB offers additional data transfer capabilities and allows connection to multiple peripherals. Stabilization time of just one second. 12.4"Wx12.9"Lx4.8"H.
NTEP Legal for Trade 13-022 III 3,000 div

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| R41ME3 | 6 x 0.0002 lb | 8.9 x 11.8" | 17 lb | 1742 | $ 1,466.00 |
| R41ME6 | 15 x 0.0005 lb | 8.9 x 11.8" | 17 lb | 1743 | 1,466.00 |
| R41ME15 | 30 x 0.001 lb | 8.9 x 11.8" | 17 lb | 1744 | 1,466.00 |
| R41ME30 | 60 x 0.002 lb | 8.9 x 11.8" | 17 lb | 1745 | 1,466.00 |
| **Options** | | | | | |
| 30037447 Ethernet kit | | | 1 lb | 7968 | 245.00 |
| 30037448 RS232 kit | | | 1 lb | 7969 | 245.00 |
| 30037449 USB kit | | | 1 lb | 3819 | 245.00 |
| 30064203 SF40A Dot Matrix printer, includes RS232 cable | | | 2 lb | 1754 | 1,552.00 |
| 80500525 Cable to IBM 9 pin serial | | | 1 lb | 3047 | 304.00 |
| 80850080 WinWedge software | | | 1 lb | 2436 | 837.00 |

**7000 Compact Bench Scale**

## Ranger 7000 Compact Bench Scale

Ranger 7000 has a die-cast sealed metal indicator and housing, ensuring it's accurate and long term operation in even the most demanding industrial environments. Stainless steel platform. 4.3" TFT graphic LCD. 8 function, 5 quick, 12 alphanumeric membrane keys. SmarText 2.0 software. Advanced application modes for a variety of complex applications which minimize the need for manual calculations. Applications for: Weighing, Density Determination, Filling, Differential Weighing, Parts Counting, Dynamic Weighing, Formulation, Check Weighing/Counting, Percent Weighing. Weighing units are: kg, g, lb, oz, lb:oz. Weigh hook below. Easily export data through RS232 or USB device port. Additional connectivity options include a second RS232 or Ethernet, and USB host port for bar code scanner or flash drive. Remote base kit, 2 in/4 out digital I/O kit. 100-240 VAC 50/60 Hz Universal Power Supply.
NTEP Legal for Trade 14-033 II and III
Canada AM 5940

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| R71MD3 | 6 x 0.0001 lb | 11" x 11" x 4.5" | 28 lb | 7960 | $ 2,924.00 |
| R71MD6 | 15 x 0.0002 lb | 11" x 11" x 4.5" | 28 lb | 7961 | 2,924.00 |
| R71MD15 | 30 x 0.0005 lb | 14.8" x 12.2" x 1.9" | 29 lb | 7962 | 2,924.00 |
| R71MD35 | 70 x 0.001 lb | 14.8" x 12.2" x 1.9" | 29 lb | 7963 | 2,924.00 |
| R71MD60 | 150 x 0,002 lb | 14.8" x 12.2" x 1.9" | 29 lb | 7343 | 2,924.00 |
| R71MHD3 | 6 x 0.00002 lb | 11" x 11" x 4.5" | 28 lb | 7964 | 4,640.00 |
| R71MHD6 | 15 x 0.00005 lb | 11" x 11" x 4.5" | 28 lb | 7965 | 5,152.00 |
| R71MHD15 | 30 x 0.0002 lb | 14.8" x 12.2" x 1.9" | 29 lb | 7966 | 6,815.00 |
| R71MHD35 | 70 x 0.002 lb | 14.8" x 12.2" x 1.9" | 29 lb | 7967 | 8,212.00 |
| **Options** | | | | | |
| 30037447 Ethernet kit | | | 1 lb | 7968 | 245.00 |
| 30037448 RS232 kit | | | 1 lb | 7969 | 245.00 |
| 30095408 Column kit painted | | | 5 lb | 7970 | 245.00 |
| 30097590 PCBA kit 2nd platform | | | 1 lb | 7971 | 246.00 |
| 30097591 Discrete I/O Kit 2in/4 out | | | 1 lb | 7972 | 245.00 |
| 30101495 Cable extension, 9 meter | | | 2 lb | 7973 | 172.00 |
| **Service Parts** | | | | | |
| 30041267 AC linecord Ranger 7000 | | | 1 lb | 4963 | 72.00 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.


www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

OHAUS®

## Valor 1000 Bench Scale

Service parts only.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| **Service Parts** | | | | | |
| 46001812 AC adapter Valor 1000 | | | 1 lb | 4974 | $ 98.00 |
| 80252845 function label keypad | | | 1 lb | 4883 | 36.00 |
| 30035606 Feet Kit | | | 1 lb | 4838 | 37.00 |
| 71172939 foot(4) | | | 1 lb | 4895 | 49.00 |
| 71172940 pan support cap(4) | | | 1 lb | 4896 | 63.00 |

**Valor 1000**
**Bench Scale**

# Bench

**Valor 2000**
**Bench Scale**

## Valor 2000 Bench Scale

Valor 2000 has a ABS housing with a stainless steel platform. Also available with a stainless steel top housing. Compact water resistant bench scale with a red LED 0.8" high dual display and a polycarbonate knife proof keypad. Applications: Weighing and checkweighing. Weighing units g, kg, lb, lb:oz. Powered by AC adapter and internal battery.with 50 hours of battery life for continuous use.
10.1"W x 11.3"D x 4.9"H.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| **Stainless Steel w/checkweighing** | | | | | |
| V22XWE1501T | 3 x 0.0005 lb | 7.5" x 9.5" | 11 lb | 8311 | $ 829.00 |
| V22XWE3T | 6 x 0.001 lb | 7.5" x 9.5" | 11 lb | 8312 | 829.00 |
| V22XWE6T | 15 x 0.002 lb | 7.5" x 9.5" | 11 lb | 8313 | 829.00 |
| V22XWE15T | 30 x 0.005 lb | 7.5" x 9.5" | 11 lb | 8314 | 829.00 |
| V22XWE30T | 60 x 0.01 lb | 7.5" x 9.5" | 11 lb | 8315 | 829.00 |
| **ABS** housing w/stainless steel pan | | | | | |
| V22PWE1501T | 3 x 0.0005 lb | 7.5" x 9.5" | 9 lb | 8316 | 727.00 |
| V22PWE3T | 6 x 0.001 lb | 7.5" x 9.5" | 9 lb | 8317 | 727.00 |
| V22PWE6T | 15 x 0.002 lb | 7.5" x 9.5" | 9 lb | 8318 | 727.00 |
| V22PWE15T | 30 x 0.005 lb | 7.5" x 9.5" | 9 lb | 8319 | 727.00 |
| V22PWE30T | 60 x 0.01 lb | 7.5" x 9.5" | 9 lb | 8320 | 727.00 |

**Valor 3000**
**Bench Scale**

## Valor 3000 Xtreme Bench Scale

T304 stainless steel housing. Chemical resistant, durable and easy to clean, technically advanced overload protection rated at 10x capacity. Quadrastance design, adjustable rubber feet ensures firm contact with bench top. SmarText user interface, bright backlit LCD. Weighing modes are: lb, dec/oz, lb:oz, fractional oz, g, kg, fl/oz. User selectable and lockable. AC adapter included or (4) C batteries (not included), NSF listed warranty 120 VAC, USDA approved, supports HACCP systems. NEMA 4X/IP65 water resistant models. 2 year warranty. 8.5"W x 7.3"D x 3".H
NTEP Legal for Trade 08-008 III 3,000 div

| Part Number | Capacity | Pan | NTEP | Weight | SKU | List |
|---|---|---|---|---|---|---|
| V31XH202 compact | 200 x 0.01g | 4.7" dia | ----- | 5 lb | 4761 | $ 1,186.00 |
| V31XH402 compact | 400 x 0.01g | 5.8" x 6.2" | ----- | 5 lb | 5465 | 1,650.00 |
| V31X501compact | 500 x 0.1g | 4.7" dia | ----- | 5 lb | 5464 | 918.00 |
| V31XH2 compact | 2,000 x 0.1g | 5.8" x 6.2" | ----- | 5 lb | 4762 | 1,186.00 |
| V31X3 compact | 3,000 x 1g | 5.8" x 6.2" | ----- | 5 lb | 4763 | 806.00 |
| V31XH4 compact | 4,000 x 0.1g | 5.8" x 6.2" | ----- | 5 lb | 5466 | 1,650.00 |
| V31X3N compact * | 3,000 x 0.5g | 5.8" x 6.2" | 3,000x1g | 5 lb | 4897 | 928.00 |
| V31X6 compact | 6,000 x 1g | 5.8" x 6.2" | ----- | 5 lb | 4764 | 806.00 |
| V31X6N compact * | 6,000 x 1g | 5.8" x 6.2" | 6,000x2g | 5 lb | 4898 | 923.00 |
| **Washdown** | | | | | | |
| V31XW301 washdown | 300 x 0.1g | 5.8" x 6.2" | ----- | 5 lb | 4765 | 923.00 |
| V31XW3 * washdown | 3,000 x 0.5g | 5.8" x 6.2" | 3,000x1g | 5 lb | 4766 | 923.00 |
| V31XW6 * washdown | 6,000 x 1g | 5.8" x 6.2" | 6,000x2g | 5 lb | 4767 | 923.00 |
| *** NTEP Legal for Trade** | | | | | | |
| **Options** | | | | | | |
| 80250400 Stainless steel scoop | | | | 2 lb | 2025 | 118.00 |
| **Service Parts** | | | | | | |
| 46001803 AC adapter Valor 3000 | | | | 1 lb | 4992 | 96.00 |
| 72203363 load cell 10kg V31 | | | | 1 lb | 4891 | 260.00 |
| 72203452 seal kit load cell for V31 | | | | 0.23 lb | 4993 | 36.00 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

OHAUS®

## Valor 4000 Bench Scale

Easy to clean, easy to transport. 6 digit, 7 segment 0.8" large dual red LED display. Keys for ON/OFF/ZERO, M+/UNITS, FUNCTION/MODE, TARE/MENU. Applications for Weighing, Percent Weighing, Checkweighing, Accumulation. Touchless sensor for Tare function. Fixed weighing pan. Overload and underload indicators. Less than 0.5s stabilization time. Low battery indicator. Level bubble. Power jack auto enclosed design. Rechargeable battery. AC adapter. IPX8. 2 year warranty. 16.1"W x 14.6"D x 8.7"H.
NTEP Legal for Trade 13-056 III 3,000 div
Canada AM-5906C

**Valor 4000 Bench Scale**

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| **V41PW:** ABS housing with 304 Stainless Steel platform. | | | | | |
| V41PWE1501T | 1.5 kg x 0.5 g | 7.5" x 9.5" | 4 lb | 7974 | $ 782.00 |
| V41PWE3T | 3 kg x 1 g | 7.5" x 9.5" | 4 lb | 7975 | 782.00 |
| V41PWE6T | 6 kg x 2 g | 7.5" x 9.5" | 4 lb | 7976 | 782.00 |
| V41PWE15T | 15 kg x 5 g | 7.5" x 9.5" | 4 lb | 7977 | 782.00 |
| **V41XW:** Stainless Steel housing and platform. | | | | | |
| V41XWE1501T | 1.5 kg x 0.5 g | 7.5" x 9.5" | 10 lb | 7978 | 918.00 |
| V41XWE3T | 3 kg x 1 g | 7.5" x 9.5" | 10 lb | 7979 | 918.00 |
| V41XWE6T | 6 kg x 2 g | 7.5" x 9.5" | 10 lb | 7980 | 918.00 |
| V41XWE15T | 15 kg x 5 g | 7.5" x 9.5" | 10 lb | 7981 | 918.00 |
| **Service Parts** | | | | | |
| 46001802 AC adapter 120 VAC w/o prong set | | | 1 lb | 716 | 98.00 |
| 46001780 Prong set, International | | | 1 lb | 714 | 36.00 |
| 46001776 Prong set, US only | | | 1 lb | 6226 | 36.00 |
| 30272114 SP Mech 4 way module | | | 1 lb | 7590 | 43.00 |
| 30028582 function label | | | 1 lb | 7153 | 37.00 |

OHAUS®

## Valor 7000 Bench Scale

**Stainless steel**, removable weighing platform. ABS housing. Touchless sensors located in the front and rear allow you to do all of your weighing without ever touching the scale. Dual backlit displays; 1.5" front and 1" rear display are both equipped with an LCD backlight for added clarity. Keys for ON/ZERO/OFF, PRINT/UNITS, FUNCTION/MODE, M+/MENU, TARE. Weighing units for lb, oz, lb:oz, g. Application modes for Weighing, Check Weighing, Check Percent, Percent Weighing, Accumulation. Rapid stabilization. Non-slip grip. Carry handle. Rechargeable lead acid battery that can provide power for more than 210 hours between charges. IP43. 2 year warranty. 15.6"W x 17.6"D x 7.7"H.
NTEP Legal for Trade 13-022 III 3,000 div
Canada AM-5907C

**Valor 7000 Bench Scale**

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| V71P1502T | 3 x 0.0001 lb | 11.8" x 8.9" | 12 lb | 3814 | $ 1,072.00 |
| V71P3T | 6 x 0.0002 lb | 11.8" x 8.9" | 12 lb | 3815 | 1,072.00 |
| V71P6T | 15 x 0.0005 lb | 11.8" x 8.9" | 12 lb | 3816 | 1,072.00 |
| V71P15T | 30 x 0.001 lb | 11.8" x 8.9" | 12 lb | 3817 | 1,072.00 |
| V71P30T | 60 x 0.001 lb | 11.8" x 8.9" | 12 lb | 3818 | 1,072.00 |
| **Options** | | | | | |
| 30037447 Ethernet kit | | | 1 lb | 7968 | 245.00 |
| 30037448 RS232 kit | | | 1 lb | 7969 | 245.00 |
| 30037449 USB kit | | | 1 lb | 3819 | 245.00 |
| 30064203 SF40A Dot Matrix printer, includes RS232 cabl e | | | 2 lb | 1754 | 1,552.00 |
| **Service Parts** | | | | | |
| 30037417 Platter | | | 1 lb | 7598 | 67.00 |
| 30037421 Foot, pack(4) | | | 1 lb | 7713 | 37.00 |

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

# Bench

**BCS40**
**Portable Brief Case scale**

## Totalcomp

### BCS Brief Case Scale

9” x 9” cast platform with indicator in a briefcase. Weighing units: lb, kg, lb-oz, g. Large high contrast LCD display. Low battery indicator. Keys for ON/OFF, TARE, UNITS. (1) 9V battery (included). Case dimensions 11”L x 13”W x 2.5”H.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| BCS-40 briefcase | 40 kg x 10 g<br>88 lb x 0.02 lb | 9 lb | 6015 | $ 220.00 |
| BCS-80 briefcase | 80 kg x 20 g<br>176 lb x 0.05 lb | 9 lb | 6016 | 287.82 |

**TVD**
**Bench Scale**

## VISIONTECH SHOP

### TVD Bench Multifunction Scale

Simple one touch weigh and count functions. 0.9 inch LCD display with backlight. Indicator has rugged ABS housing. Applications for Weighing, Counting, Check Weighing, Percent weighing and Accumulation. Keys for ZERO/ON/OFF, TARE, UNIT, PRINT/HOLD. Units: lb, ounce, kg, grams. 9 volt battery operated with power adapter included. Standard USB interface can be connected to computer for receiving weight data. Overall 12.6” W x 13.7” D x 3.96” H.
NTEP Legal for Trade

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| TVD-6 | 6 lb x 0.001 lb<br>3 kg x 0.0005 kg<br>96 oz x 0.02 oz | 9 x 12” | 11 lb | 951 | $ 381.25 |
| TVD-12 | 12 lb x 0.002 lb<br>6 kg x 0.001 kg<br>192 oz x 0.05 oz | 9 x 12” | 11 lb | 952 | 381.25 |
| TVD-30 | 30 lb x 0.005 lb<br>12 kg x 0.002 kg<br>480 oz x 0.1 oz | 9 x 12” | 11 lb | 953 | 381.25 |
| TVD-60 | 60 lb x 0.01 lb<br>30 kg x 0.005 kg<br>960 oz x 0.2 oz | 9 x 12” | 11 lb | 954 | 381.25 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287



13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

A&D WEIGHING DIVISION

## HV Bench Scale

Waterproof and dustproof, IP-65 rating. Stainless stell construction.. Triple range on HV series. Comparator function for high and low set points with HI/OK/LO on display. GLP/GMP/ISO Compliant. CP models include built-in printer. The 10-digit alphanumeric keypad simplifies setting comparator limits.
NTEP Legal for Trade 90-064A2

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| **Multi Capacity Bench Scale** | | | | | |
| HV-15KC | 6 x 0.002 lb<br>15 x 0.005 lb<br>30 x 0.001 lb | 9.8”x9.8” | 13 lb | 2571 | $ 1,190.00 |
| HV-60KC | 30 x 0.01 lb<br>60 x 0.02 lb<br>150 x 0.05 lb | 13.0”x16.7” | 24 lb | 2572 | 1,190.00 |
| HV-200KC | 150 x 0.05 lb<br>300 x 0.1 lb<br>500 x 0.2 lb | 15.4”x20.9” | 37 lb | 2573 | 1,500.00 |
| **Printer built into indicator** | | | | | |
| HV-15KCP | 6 x 0.002 lb<br>15 x 0.005 lb<br>30 x 0.01 lb | 9.8”x9.8” | 13 lb | 2578 | 1,825.00 |
| HV-60KCP | 30 x 0.01 lb<br>60 x 0.02 lb<br>150 x 0.05 lb | 13.0”x16.7” | 24 lb | 2579 | 1,905.00 |
| HV-200KCP | 150 x 0.05 lb<br>300 x 0.1 lb<br>500 x 0.2 lb | 15.4”x20.9” | 37 lb | 2580 | 2,080.00 |
| **High Resolution Single Range** | | | | | |
| HW-10KC | 20 x 0.002 lb | 9.8”x9.8” | 13 lb | 2574 | 1,305.00 |
| HW-60KC | 150 x 0.01 lb | 13.0”x16.7” | 24 lb | 2575 | 1,405.00 |
| HW-100KC | 200 x 0.02 lb | 15.4”x20.9” | 37 lb | 2576 | 1,475.00 |
| HW-200KC | 500 x 0.05 lb | 15.4”x20.9” | 37 lb | 2577 | 1,585.00 |
| **Printer built into indicator** | | | | | |
| HW-10KCP | 20 x 0.02 lb | 9.8”x9.8” | 13 lb | 2581 | 1,975.00 |
| HW-60KCP | 150 x 0.01 lb | 13.0”x16.7” | 24 lb | 2582 | 2,115.00 |
| HW-100KCP | 200 x 0.02 lb | 15.4”x20.9” | 37 lb | 2583 | 2,235.00 |
| HW-200KCP | 500 x 0.05 lb | 15.4”x20.9” | 37 lb | 2584 | 2,315.00 |
| **Service parts** | | | | | |
| ED:HT4096A-TI LCD display HVG HWG AD-4406 | | | 1 lb | 1303 | 51.45 |

**HV-15KC**

## LC:127 A&D

Replacement for HV HWG
1 mv/v, 350/350 ohms, 1.5m 4 cond cable, anodized aluminum.

| Part Number | Scale | Capacity | Weight | SKU | List |
|---|---|---|---|---|---|
| LC:127-60K | HV-60KWP | 2 kg | 2 lb | 6063 | $ 276.66 |

**LC:1271**

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.

# Bench



A&D WEIGHING DIVISION

**HW-10KGV**
**Bench/Floor**

## HW-G Bench Scale

Reliable and rugged. Outstanding price performance. Indicator head tilts and rotates on the column to adjust for the best viewing angle. Standard RS232 interface. Counting and % function. M+ function for totaling weighing data. Front panel keys for ON/OFF, ZERO, TARE, F, SET, SAMPLE, MODE, PRINT. HV models have automatic triple range. VFD (Vacuum Fluorescent Display) work on AC adapter only. Sealed to IP65.
NTEP Legal for Trade 00-088 III 3,000 div (HV series)
Canadian W&M approval AM-5404 on HV-V and HV-L.

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| **VFD Vacuum Fluorescent Display** | | | | | |
| HW-10KGV | 20 x 0.002 lb | 9.8” x 9.8” | 16 lb | 4462 | $ 885.00 |
| **Options** | | | | | |
| TB:662 AC adapter 120 VAC | | | 1 lb | 1305 | 50.00 |
| FV-06 AC adapter 220 VAC | | | 1 lb | 1306 | 65.00 |
| **Service Parts** | | | | | |
| PZ:2755-LCD Main board w/display for HV-GL | | | 1 lb | 3125 | 219.00 |
| PZ:3414 main board HV-GV HW-GV | | | 1 lb | 5964 | 367.82 |
| 10:DH-26-1-AD Battery Holder for HV HW | | | 1 lb | 3128 | 15.90 |
| AX:00A34062 Plastic cover for display pod HV HW | | | 1 lb | 1307 | 15.75 |

**LC:4102**

## LC:4102 & LC:4103 A&D

Replacement for A&D Model HV & HW (FV & FW) (AP & APX)
1 mv/v, 400/350 ohms, 1.5m (4102)/2m (4103) 4 cond cable, anodized aluminum, IP67

| Part Number | Scale | Capacity | Weight | SKU | List |
|---|---|---|---|---|---|
| **Load cells for HV** | | | | | |
| LC:4102-K030 | HV-30KA2 | 30 kg | 2 lb | 341 | $ 320.25 |
| LC:4102-K060 | HV-60KA2 | 60 kg | 2 lb | 342 | 330.75 |
| LC:4103-K060 | HV-60KA1 | 60 kg | 3 lb | 343 | 388.50 |
| LC:4103-K150 | HV-120KA1 | 150 kg | 4 lb | 345 | 399.00 |
| **Load cells for HW** | | | | | |
| LC:4102-K010 | HW-10KA2 | 10 kg | 2 lb | 339 | 346.50 |
| LC:4102-K015 | HW-15KA2 | 15 kg | 2 lb | 340 | 346.50 |
| LC:4102-K030 | HW-30KA2 | 30 kg | 2 lb | 341 | 320.25 |
| LC:4102-K060 | HW-60KA2 | 60 kg | 2 lb | 342 | 330.75 |
| LC:4103-K100 | HW-100KA1 | 100 kg | 3 lb | 344 | 410.00 |
| LC:4103-K150 | HW-150KA1 | 150 kg | 4 lb | 345 | 399.00 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

A&D WEIGHING DIVISION

## HV-WP Washdown SS Bench Scale

Waterproof and dustproof, NEMA 4 IP-65 rating. Stainless steel construction. Triple range on HV series. Preset tare values can be digitally stored. Comparator function for high and low set points with HI/OK/LO on display. Optional comparator output sounds buzzer. High visibility VFD Vacuum fluorescent Display. Displays weight in lb, kg or piece count. Front panel keys for ZERO, TARE, SET, RANGE, MODE, PRINT, ON/OFF. Drip proof design for easy cleaning with water. 120 VAC.
Canadian approval AM-5404 (HV series)
NTEP Legal for Trade 00-088 III 3,000 div (HV series)

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| HV-200KWP | 150 x 0.05 lb<br>300 x 0.1 lb<br>500 x 0.2 lb | 15.4" x 20.9" | 42 lb | 4497 | $ 1,695.75 |
| **Options** | | | | | |
| HVWP-03 RS232, Comp/Setpoint output(relays & audio) | | | 1 lb | 4502 | 199.50 |
| HVWP-04 RS422/485, Comparator/Setpoint output(relays) | | | 1 lb | 4503 | 183.75 |
| **Service Parts** | | | | | |
| PZ:3414 main board HV-WD HW-WP | | | 1 lb | 5964 | 367.82 |
| 707:A21456 swivel head bracket | | | 1 lb | 1992 | 112.36 |
| PZ:3415 power relay board | | | 1 lb | 1402 | 58.30 |

**HV-15KWP**
**Bench/Floor**

## HV-G HW-G Bench/Floor Scale-Service Parts

Sevice Parts for HV-G HW-G

| Part Number | Weight | SKU | List |
|---|---|---|---|
| **Service Parts** | | | |
| LC:126-15K load cell SB15K10 | 2 lb | 4938 | 217.30 |
| LC:128-220K load cell HVG HWG HVWP HWWP | 2 lb | 4724 | 322.24 |
| 03:1000077A pole base large | 1.68 lb | 4781 | 55.12 |
| 10:A46050-2 swivel head bracket cap | 1 lb | 4754 | 10.50 |
| 07:1000097A upper case | 1 lb | 4755 | 15.90 |
| 07:1000098 lower case | 1 lb | 4757 | 22.26 |
| 07:2000417 battery cover | 1 lb | 4758 | 10.60 |
| 07:1000099 battery case | 1 lb | 4759 | 10.60 |
| 07:3003185 battery holder | 1 lb | 4760 | 10.60 |
| 07:3003186 HV-G/HW-G rear cover | 1 lb | 1399 | 10.60 |
| 08:4007481-4B HV-GL Display filter | 1 lb | 1297 | 14.84 |
| 08:4007463 HV-GL keysheet | 1 lb | 1298 | 21.20 |
| 08:3003337-9 HV-60KG capacity label (Non-NTEP) | 1 lb | 1299 | 10.60 |
| 08:4007465 HV-60KGL model label | 1 lb | 1300 | 10.60 |
| PZ:3413 HV-GL/HW-GL main board w/display | 1 lb | 1301 | 334.96 |

**HV-200KWP**
**Bench/Floor**

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

# Bench

**FG-K**
**Bench/Floor**
**w/ column**

**FG-K**
**Bench/Floor**
**w/o column**

A&D WEIGHING DIVISION

## FG Bench scale

Self contained, battery operated (6)AA batteries (not included) and AC adapter (included). Approximately 100 hours with alkaline type cells. Full capacity push button tare. Switch selectable pound or kilogram display. All models can be wall or tower mounted. Rugged, durable and portable. 120 VAC, 50/60 Hz, 1.5 watts. Accuracy +/-1 div. 1 Year warranty.
Canadian Weights & Measures AM-4995
USDA Approved
NTEP Legal for Trade 93-063 III 3,000 div.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| **No Column** | | | | | |
| FG-30KBMN | 60 x 0.02 lb | 11.8” x 15” | 27 lb | 3587 | $ 805.00 |
| FG-60KBMN | 150 x 0.05 lb | 11.8” x 15” | 27 lb | 3588 | 815.00 |
| FG-150KBMN | 300 x 0.1 lb | 11.8” x 15” | 27 lb | 3589 | 875.00 |
| **With Column** | | | | | |
| FG-30KAMN | 60 x 0.02 lb | 11.8” x 15” | 31 lb | 5826 | 840.00 |
| FG-60KAMN | 150 x 0.05 lb | 11.8” x 15” | 31 lb | 5827 | 865.00 |
| FG-150KAMN | 300 x 0.1 lb | 11.8” x 15” | 31 lb | 5828 | 975.00 |
| FG-60KALN | 150 x 0.05 lb | 15.4” x 20.9” | 43 lb | 5829 | 965.00 |
| FG-150KALN | 300 x 0.1 lb | 15.4” x 20.9” | 43 lb | 5830 | 1,050.00 |
| FG-200KALN | 400 x 0.1 lb | 15.4” x 20.9” | 43 lb | 932 | 1,125.00 |
| **Options** | | | | | |
| FG-23 RS232 FG-N | | | 1 lb | 3592 | 95.00 |
| FG-24 Comparator / Setpoints relay outputs | | | 4 lb | 3593 | 125.00 |
| FG-25 Display wall mount bracket for FG-N | | | 1 lb | 3590 | 106.00 |
| FG-26 Carrying handle for FG-N | | | 1 lb | 3595 | 145.00 |
| **Service Parts (for new style FGN)** | | | | | |
| 07:1000369A lower display case FGK | | | 1 lb | 502 | 25.44 |
| 07:1000368 upper display case FGK | | | 1 lb | 503 | 21.20 |
| PZ:4340 main board w/ display | | | 1 lb | 504 | 352.98 |
| 07:3007527A plastic display cover | | | 1 lb | 505 | 24.38 |
| 08:2000992A keysheet | | | 1 lb | 508 | 21.20 |
| 07:3007273 leveling foot | | | 1 lb | 509 | 22.26 |
| 02:4015536 column FGKAL | | | 2 lb | 506 | 93.28 |
| 1024015534 column FGKAM | | | 2 lb | 507 | 71.02 |
| 707:A21500 swivel head bracket | | | 1 lb | 514 | 89.04 |
| 07:A21456 indicator support FG HV HW | | | 5 lb | 780 | 15.96 |
| 07:3007280A battery cover FGK | | | 1 lb | 795 | 10.60 |
| LC:150-30K load cell KBM,KAM,KAL | | | 1.04 lb | 766 | 322.24 |
| LC:150-60K load cell KBM,KAM,KAL | | | 1.04 lb | 764 | 322.24 |
| TB:662 AC adapter 120 VAC | | | 1 lb | 1305 | 50.00 |
| FV-06 AC adapter 240VAC | | | 1 lb | 1306 | 65.00 |
| **Service Parts (for old style w/o suffix N)** | | | | | |
| 01:B30082A keysheet for FG S/N prefix H | | | 1 lb | 2775 | 19.00 |
| 07:B49929 leveling foot for FG | | | 1 lb | 6180 | 14.84 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.


www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

A&D WEIGHING DIVISION

## SE Washdown Scale

Washdown construction for easy cleaning. Mild steel construction. Stainless steel weighing pan. IP68 dust and water proof. Waterproof and corrosion resistant load cell. Supersized LCD of 39 mm character height. Multiple weighing units for kg, lb, oz, pcs. 4500 hours of battery life. Stabilization of 1 second. Quick USB interface or RS232C+ comparator relay output available as options. 2 year warranty.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| SE-30KAM | 66 x 0.01 lb | 11.8” x 15” | 32 lb | 5484 | $ 1,295.00 |
| SE-60KAM | 130 x 0.02 lb | 11.8” x 15” | 32 lb | 5485 | 1,305.00 |
| SE-150KAM | 330 x 0.05 lb | 11.8” x 15” | 32 lb | 5487 | 1,425.00 |
| SE-60KAL | 130 x 0.02 lb | 15.4” x 20.9” | 46 lb | 5488 | 1,317.75 |
| SE-150KAL | 330 x 0.05 lb | 15.4” x 20.9” | 46 lb | 5489 | 1,455.00 |

**Options**

| | | | | |
|---|---|---|---|---|
| SCE-02 Quick USB Interface | 1 lb | 3486 | 205.00 |
| SCE-03 RS232C interface + comparator | 1 lb | 3488 | 245.00 |

Note: SCE-02 and SCE-03 cannot be used at the same time. With either options installed the scale is not IP68 compliant.

**SE**
**Washdown Scale**
**Mild steel**

A&D WEIGHING DIVISION

## SC Washdown Scale

Washdown construction for easy cleaning. Stainless steel construction. Stainless steel weighing pan. IP68 dust and water proof. Waterproof and corrosion resistant load cell. Supersized LCD of 39 mm character height. Multiple weighing units for kg, lb, oz, pcs. 4500 hours of battery life. Stabilization of 1 second. Quick USB interface or RS232C+ comparator relay output available as options. 2 year warranty.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| SC-30KAM | 66 x 0.01 lb | 11.8” x 15” | 34 lb | 3490 | $ 1,915.00 |
| SC-60KAM | 130 x 0.02 lb | 11.8” x 15” | 34 lb | 3491 | 1,990.00 |
| SC-150KAM | 330 x 0.05 lb | 11.8” x 15” | 34 lb | 3493 | 2,020.00 |
| SC-60KAL | 130 x 0.02 lb | 15.4” x 20.9” | 45 lb | 3494 | 2,070.00 |
| SC-150KAL | 330 x 0.05 lb | 15.4” x 20.9” | 45 lb | 3495 | 2,100.00 |

**Options**

| | | | |
|---|---|---|---|
| SCE-02 Quick USB Interface | 1 lb | 3486 | 205.00 |
| SCE-03 RS232C interface + comparator | 1 lb | 3488 | 245.00 |

Note: SCE-02 and SCE-03 cannot be used at the same time. With either options installed the scale is not IP68 compliant.

**SC**
**Washdown Scale**
**Stainless steel**

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

# Bench

**SW**
**Washdown Scale**

A&D WEIGHING DIVISION

## SW High Pressure Washdown Scale

Stainless steel. IP69k, the highest level of dust and water proofing. Streamlined construction for easy cleaning of food processing residues. Capactive keys for light touch operation. Bright, multicolored LED display with 5 level comparator lamps. Rugged and adjustable indicator bracket. Ultimate protection against condensation.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| SW-6KS | 13 x 0.001 lb | 9.8" x 9.8" | 25 lb | 7579 | $ 2,355.00 |
| SW-15KS | 33 x 0.002 lb | 9.8" x 9.8" | 25 lb | 7580 | 2,380.00 |
| SW-15KM | 33 x 0.002 lb | 11.8" x 15" | 39 lb | 7581 | 2,770.00 |
| SW-30KM | 66 x 0.005 lb | 11.8" x 15" | 39 lb | 7582 | 2,770.00 |
| SW-60KM | 130 x 0.01 lb | 11.8" x 15" | 39 lb | 7583 | 2,930.00 |
| SW-150KM | 330 x 0.02 lb | 11.8" x 15" | 39 lb | 7584 | 3,045.00 |
| SW-60KL | 130 x 0.01 lb | 15.4" x 20.9" | 49 lb | 7585 | 3,135.00 |
| SW-150KL | 330 x 0.02 lb | 15.4" x 20.9" | 49 lb | 7586 | 3,270.00 |
| **Options** | | | | | |
| SW-03 RS232C Plus comparator relay | | | 1 lb | 7587 | 235.00 |
| SW-04 RS422/485 output for SW | | | 1 lb | 7588 | 170.00 |
| SW-11 Wall mount bracket | | | 2 lb | 7589 | 130.00 |
| HC-06i Rechargeable battery pack | | | 4 lb | 6786 | 65.00 |

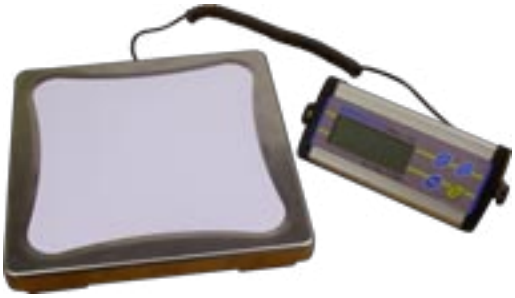

**CPWplus 6**
**Bench/Floor Scale**

ADAM

## CPW plus 6 Bench Scale

Rugged construction. The CPWplus series offers an extensive range of models and configurations to accommodate a variety of applications. Desktop or wall mountable indicator. 1 " backlit LCD display. Color coded buttons with positive click feel, and simple, quick operation. Keys are: ON/OFF, PRINT/HOLD, UNIT, TARE/ZERO. Weighing units are: lb, kg, oz, lb/oz. Bi-directional RS232 interface allows connection to printers or computers. Using standard commands users can request gross, net and tare weights be sent automatically. Optional Adam data collection software collects scale data and can produce charts and statistics, or export raw data to Microsoft Excel or Word for further analysis. Alkaline battery or AC operation. (6) AA batteries not included.

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| CPWplus 6 | 13 x 0.005 lb | 11.8" x 11.8" | 10 lb | 7434 | $ 255.00 |
| CPWplus 15 | 33 x 0.01 lb | 11.8" x 11.8" | 10 lb | 7435 | 270.00 |
| CPWplus 35 | 75 x 0.02 lb | 11.8" x 11.8" | 10 lb | 7436 | 270.00 |
| CPWplus 75 | 165 x 0.05 lb | 11.8" x 11.8" | 10 lb | 7437 | 270.00 |
| CPWplus 150 | 330 x 0.1lb | 11.8" x 11.8" | 10 lb | 7438 | 290.00 |
| CPWplus 200 | 440 x 0.1 lb | 11.8" x 11.8" | 10 lb | 7439 | 315.00 |
| **Options** | | | | | |
| 700100099 Hard carrying case | | | 8 lb | 7440 | 117.00 |
| Quick disconnect connector cable | | | 1 lb | 6517 | 38.00 |
| **Service Parts** | | | | | |
| 700400024 AC adapter | | | 1 lb | 7042 | 53.30 |
| 02409160 adapter 120 vac | | | 1 lb | 252 | 53.33 |

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287



13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

Totalcomp

## TEI Bench/Floor Scale

The TEI is a versatile bench top scale recommended for light industrial weighing, home, office, mail room, shipping and receiving applications. 6.5 digit, 1" high LCD with backlight display. With a generous 12" x 14" stainless steel platter and aluminum subframe it is rugged and durable with adjustable feet. TEI indicator has aluminum alloy housing. Keys for: Hold/Set-up, Print/Function, Acc/Total, Unit/Data, Tare/Preset, Zero/On/Off. Weighing units for: Standard Weighing, Check Weighing, Peak Hold, Percent. Selectable Weighing units for: lb/kg/lb:oz. TEI indicator is programmable for Over/Under, Check Weighing with Sound Alarm, Digital Filtering to meet different working environments. Includes a full duplex RS232 output. Data format 8N1, 701; 7E1, . Protocol: 8 selections. Baud rate 300-19200 bps selectable. TEI scale is powered by 4 (AA) batteries (not included). USB power plug or AC adapter included. Indicator mounts on table or wall with moveable bracket. TEI indicator has a 9' long coil cord with quick disconnect from indicator to base. Indicator can be used as a remote display, using the RS232 port. AC adapter, 6VDC/500mA included.

**TEI**
**Bench/Floor Scale**

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| TEI-10 | 10kg x 0.001kg | 12" x 14" | 15 lb | 5741 | $ 464.00 |
| TEI-20 | 20kg x 0.002kg | 12" x 14" | 15 lb | 5742 | 464.00 |
| **Service Parts** | | | | | |
| DHC002 conn 7 pin, indicator | | | 1 lb | 7595 | 19.30 |
| DHC001 conn 7 socket, load cell | | | 1 lb | 7596 | 19.30 |
| TEI-50 indicator w/ bracket | | | 4 lb | 5737 | 240.00 |
| Keysheet TEI-10 | | | 1 lb | 6168 | 17.00 |
| Keysheet TEI-20 | | | 1 lb | 6169 | 17.00 |
| Keysheet TEI-50 S/N below 10070178 | | | 1 lb | 6170 | 17.00 |
| Keysheet TEI-50 S/N above 18120001 | | | 1 lb | 6191 | 17.00 |
| Keysheet TEI-100 | | | 1 lb | 6171 | 17.00 |
| Adapter 120 VAC | | | 1 lb | 6172 | 29.00 |

DETECTO
A Division of Cardinal Scale Manufacturing Co.

## Low Profile Bench Scale

Large 1" LCD display. Lb/kg conversion. Battery power. Auto shutoff. Push button tare. Indicator mounts on table or wall. Keys for LB/KG, TARE/HOLD, ON, OFF. Painted steel construction. Powered by (6) "AA" alkaline batteries or 120 VAC adapter (included) 50/60 Hz.

**DR400**
**Low profile**
**Bench/Floor Scale**

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| DR150 low profile | 150 x 0.2 lb | 12" x 12" | 15 lb | 6002 | $ 220.00 |
| DR400 low profile | 400 x 0.5 lb | 12" x 12" | 15 lb | 6003 | 240.00 |

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

# Bench

**C11P9**
**Bench/Floor Scale**

OHAUS®

## Catapult 1000 Bench Scale

Reliable and precise performance in an affordable, compact design. ABS plastic housing and pan. Unparalleled Ohaus durability. Three capacities, from 20 lb to 165 lb. Reading in pounds and kilograms. Weighing and dynamic weighing modes. Overload protection for tough environments where capacity is exceeded regularly. Ultra portable design. Easy to transport and hold with it's light weight, battery operation and built in handles. Auto shut off mode. Rubber non-slip feet. Digital external calibration. AC powered (included) or (3) C batteries (not included). 1 year warranty.

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| C11P9 | 20 x 0.01 lb | 12.4" x 11" | 7 lb | 6906 | $ 345.00 |
| **Options** | | | | | |
| 80251248 Stainless steel cover | | 12.4" x 11" | 1 lb | 6909 | 88.00 |
| 80250400 Stainless steel scoop | | | 2 lb | 2025 | 118.00 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

OHAUS®

## ES Bench Scale

Self contained, battery operated. Low profile, rugged, durable and portable. Weighing units are kg, lb, oz, and lb:oz. Display is 1" high LCD. Unique 3-way mounting bracket allows the indicator to be mounted to the base , above the scale platform or on any vertical surface. Full capacity push button tare. **Stainless steel** platforms. Frame is painted steel. Power from 9VDC AC adapter (included) or (6) AA batteries (not included). Battery life is 120 hours or 30 hours continuous use. Battery saving auto off timer will turn unit off after 5 minutes of inactivity. Industrial weighing (not legal for trade). Accuracy +/-1 div. 1 Year warranty.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| ES30R | 66 lb x 0.05 lb<br>30 kg x 0.01 kg | 12.2"x10.8"x1.5" | 10 lb | 2905 | $ 1,081.00 |
| ES100L | 220 lb x 0.1 lb<br>100 kg x 0.05 kg | 20.5"x15.7"x3" | 36 lb | 2908 | 1,175.00 |
| ES200L | 440 lb x 0.2 lb<br>200 kg x 0.1 kg | 20.5"x15.7"x3" | 37 lb | 2909 | 1,175.00 |
| **Service Parts** | | | | | |
| 46001724 AC adapter 120VAC to 12VDC, 500ma w/o prong set | | | 1 lb | 6164 | 80.00 |
| 46001776 Prong set, US only | | | 1 lb | 6226 | 36.00 |
| 46001780 Prong set, International | | | 1 lb | 714 | 36.00 |
| 71148237 cable w/connector ES | | | 1 lb | 6712 | 47.00 |
| 71138841 display ES200L | | | 1 lb | 2587 | 817.00 |

**ES100L**
**Bench/Floor**

**ES30R**
**w/mounting bracket (included)**

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

# Bench

**D31XW30VR**
**Bench/Floor**

OHAUS®

## Defender 3000 Xtreme Bench Scale

The solution to your weighing applications that require dependability within an affordable budget. Ideal for general weighing and simple counting applications in wet or damp environments. 304 stainless steel pan and frame. Simple, rugged, tubular frame base design. 6 digit, 7 segment backlit LCD display. Keys are: ZERO/ON/OFF, PRINT/UNITS, FUNCTON/MODE, TARE/MENU. Weighing units are: lb, oz, lb/oz, kg, g. Parts counting mode with selectable sample sizes, last sample size and average piece weight data. Indicator features a **stainless steel** housing with NEMA 4X / IP65 protection. Flexible mounting capabilities. Hardware configuration lockout switch Built in bidirectional RS232C with manual/continuous/interval printing. Internal adapter with 100 hour internal rechargeable lead acid battery included. 2 year warranty.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| **26.8" column** | | | | | |
| D32XW60VL | 150 x 0.02 lb | 16.5" x 21.6" x 5.4" | 67 lb | 5495 | $ 2,308.00 |
| | | | | | |
| **Options** | | | | | |
| CBM-910 Impact printer 42 column | | | 5 lb | 7426 | 395.00 |
| 80250400 Stainless Steel scoop | | | 2 lb | 2025 | 118.00 |

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

OHAUS®

## Defender 3000 Bench Scale

Large bright backlit LCD display. In checkweighing mode display changes color (yellow/green//red). Tough industrial scale has a 304 stainless steel platform, powder coated steel tubular frame, column and aluminum load cell. Indicator has an ABS housing and powder coated steel mounting bracket. Keys are: ZERO/ON/OFF, PRINT/UNITS, FUNCTON/MODE, TARE/MENU. Weighing units are: lb, oz, lb/oz, kg, g. Auto off. Parts counting mode with selectable sample sizes, last sample size and average piece weight. Bi-directional RS 232C for manual, continuous and interval printing. 9 VDC 500mA, AC adapter. 2 year warranty.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| **13.8" column** | | | | | |
| i-D33P15B1R1 | 30 x 0.005 lb | 12" x 14" x 4.8" | 29.5 lb | 956 | $ 1,175.00 |
| i-D33P30B1R1 | 60 x 0.01 lb | 12" x 14" x 4.8" | 29.5 lb | 957 | 1,175.00 |
| i-D33P60B1R1 | 150 x 0.02 lb | 12" x 14" x 4.8" | 29.5 lb | 958 | 1,175.00 |
| **26.8" column** | | | | | |
| i-D33P75B1L2 | 150 x 0.02 lb | 16.5" x 21.7" x 5.9" | 46.2 lb | 959 | 1,425.00 |
| i-D33P150B1L2 | 300 x 0.05 lb | 16.5" x 21.7" x 5.9" | 46.2 lb | 960 | 1,425.00 |
| i-D33P150B1X2 | 300 x 0.05 lb | 19.7" x 25.6" x 5.9" | 67.3 lb | 961 | 1,543.00 |
| i-D33P300B1X2 | 600 x 0.1 lb | 19.7" x 25.6" x 5.9" | 67.3 lb | 962 | 1,543.00 |
| **38.6" column** | | | | | |
| i-D33P300B1V3 | 600 x 0.1 lb | 23.6" x 31.5" x 6.1" | 109 lb | 963 | 1,663.00 |
| i-D33P600B1V3 | 1,200 x 0.2 lb | 23.6" x 31.5" x 6.1" | 109 lb | 964 | 1,663.00 |
| **Front mount indicator** | | | | | |
| i-D33P15B1R5 | 30 x 0.005 lb | 12" x 14" x 4.8" | 26.5 lb | 2274 | 1,001.00 |
| i-D33P30B1R5 | 60 x 0.01 lb | 12" x 14" x 4.8" | 26.5 lb | 2275 | 1,001.00 |
| i-D33P75B1R5 | 150 x 0.02 lb | 12" x 14" x 4.8" | 26.5 lb | 2276 | 1,001.00 |
| i-D33P75B1L5 | 150 x 0.02 lb | 16.5" x 21.7" x 5.9" | 43.2 lb | 2277 | 1,156.00 |
| i-D33P150B1L5 | 300 x 0.05 lb | 16.5" x 21.7" x 5.9" | 43.2 lb | 2278 | 1,156.00 |
| i-D33P150B1X5 | 300 x 0.05 lb | 19.7" x 25.6" x 5.9" | 64.3 lb | 2279 | 1,489.00 |
| i-D33P300B1X5 | 600 x 0.1 lb | 19.7" x 25.6" x 5.9" | 64.3 lb | 2280 | 1,489.00 |
| **Options** | | | | | |
| 30699120 USB device interface kit | | | 1 lb | 3118 | 148.00 |
| 30429666 ethernet interface kit | | | 1 lb | 3119 | 262.00 |
| 80500525 cable RS232 IBM 9 pin male to female | | | 1 lb | 3047 | 304.00 |
| 30064203 printer, impact SF40A, AM | | | 2 lb | 1754 | 1,552.00 |
| 30699122 rechargeable battery kit i-DT33P | | | 4 lb | 3121 | 74.00 |
| 30699121 dust cover set(5) i-DT33 | | | 1 lb | 3122 | 74.00 |
| 30616409 wheel kit, stainless steel, up to 300 lb | | | 12 lb | 3123 | 262.00 |
| 30372146 wheel kit, Defender series | | | 8 lb | 3124 | 211.00 |
| **Service Parts** | | | | | |
| 30648433 indicator i-DT33P | | | 4 lb | 3116 | 489.00 |

**D33P15B1R1**
**Column mount**
**Bench/Floor**

**D33P15B1R5**
**Front mount**
**Bench/Floor**

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

# Bench

**D3XW15B1R1**
**Column mount**
**Bench/Floor**

**D33XW15B1R5**
**Front mount**
**Bench/Floor**

OHAUS®

## Defender 3000 Hybrid Bench Scale

Large bright backlit LCD display. In checkweighing mode display changes color (yellow/green//red). Tough industrial scale has a 304 stainless steel platform, powder coated steel tubular frame, column and aluminum load cell. Indicator has an stainless steel housing and mounting bracket. Keys are: ZERO/ON/OFF, PRINT/UNITS, FUNCTON/MODE, TARE/MENU. Weighing units are: lb, oz, lb/oz, kg, g. Auto off. Parts counting mode with selectable sample sizes, last sample size and average piece weight. Bi-directional RS 232C for manual, continuous and interval printing. 9 VDC 500mA, AC adapter. 2 year warranty.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| **13.8" column** | | | | | |
| i-D33XW15B1R1 | 30 x 0.005 lb | 12" x 14" x 4.8" | 33.4 lb | 2777 | $ 1,312.00 |
| i-D33XW30B1R1 | 60 x 0.01 lb | 12" x 14" x 4.8" | 33.4 lb | 2778 | 1,312.00 |
| i-D33XW60B1R1 | 150 x 0.02 lb | 12" x 14" x 4.8" | 33.4 lb | 2779 | 1,312.00 |
| **26.8" column** | | | | | |
| i-D33XW75B1L2 | 150 x 0.02 lb | 16.5" x 21.7" x 5.9" | 48.9 lb | 2780 | 1,543.00 |
| i-D33XW150B1L2 | 300 x 0.05 lb | 16.5" x 21.7" x 5.9" | 48.9 lb | 2781 | 1,543.00 |
| i-D33XW150B1X2 | 300 x 0.05 lb | 19.7" x 25.6" x 5.9" | 67.3 lb | 2782 | 1,663.00 |
| i-D33XW300B1X2 | 600 x 0.1 lb | 19.7" x 25.6" x 5.9" | 67.3 lb | 2783 | 1,663.00 |
| **38.6" column** | | | | | |
| i-D33XW300B1V3 | 1,200 x 0.1 lb | 23.6" x 31.5" x 6.1" | 109 lb | 2784 | 1,782.00 |
| i-D33XW600B1V3 | 1,200 x 0.2 lb | 23.6" x 31.5" x 6.1" | 109 lb | 2785 | 1,782.00 |
| **Front mount indicator** | | | | | |
| i-D33XW15B1R5 | 30 x 0.005 lb | 12" x 14" x 4.8" | 26.5 lb | 3291 | 1,253.00 |
| i-D33XW30B1R5 | 60 x 0.01 lb | 12" x 14" x 4.8" | 26.5 lb | 3292 | 1,253.00 |
| i-D33XW75B1R5 | 150 x 0.02 lb | 12" x 14" x 4.8" | 26.5 lb | 3293 | 1,253.00 |
| i-D33XW75B1L5 | 150 x 0.02 lb | 16.5" x 21.7" x 5.9" | 43.2 lb | 3294 | 1,489.00 |
| i-D33XW150B1L5 | 300 x 0.05 lb | 16.5" x 21.7" x 5.9" | 43.2 lb | 3295 | 1,489.00 |
| i-D33XW150B1X5 | 300 x 0.05 lb | 19.7" x 25.6" x 5.9" | 64.3 lb | 3296 | 1,610.00 |
| i-D33XW300B1X5 | 600 x 0.1 lb | 19.7" x 25.6" x 5.9" | 64.3 lb | 3297 | 1,610.00 |
| **Options** | | | | | |
| 30699120 USB device interface kit | | | 1 lb | 3118 | 148.00 |
| 30429666 ethernet interface kit | | | 1 lb | 3119 | 262.00 |
| 30064203 printer, impact SF40A, AM | | | 2 lb | 1754 | 1,552.00 |
| 30699121 dust cover set(5) i-DT33 | | | 1 lb | 3122 | 74.00 |
| 30616409 wheel kit, stainless steel, up to 300 lb | | | 12 lb | 3123 | 262.00 |
| 30372146 wheel kit, Defender series | | | 8 lb | 3124 | 211.00 |
| **Service Parts** | | | | | |
| 30699120 indicator i-DT33XW | | | 9 lb | 2472 | 627.00 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.


www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp®
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

OHAUS®

## Defender 3000 Washdown Bench Scale

Large bright backlit LCD display. In checkweighing mode display changes color (yellow/green//red). Tough industrial scale has a 304 stainless steel platform, frame, column and IP67 load cell. Indicator has an IP66 protected 304 stainless steel housing and mounting bracket. Keys are: ZERO/ON/OFF, PRINT/UNITS, FUNCTON/MODE, TARE/MENU. Weighing units are: lb, oz, lb/oz, kg, g. Auto off. Parts counting mode with selectable sample sizes, last sample size and average piece weight. Bi-directional RS 232C for manual, continuous and interval printing. 9 VDC 500mA, AC adapter. 2 year warranty.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| **13.8" column** | | | | | |
| i-D33XW15C1R6 | 30 x 0.005 lb | 12" x 14" x 4.8" | 33.7 lb | 2892 | $ 2,139.00 |
| i-D33XW30C1R6 | 60 x 0.01 lb | 12" x 14" x 4.8" | 33.7 lb | 2893 | 2,139.00 |
| i-D33XW60C1R6 | 150 x 0.02 lb | 12" x 14" x 4.8" | 33.7 lb | 2894 | 2,139.00 |
| **26.8" column** | | | | | |
| i-D33XW75C1L7 | 150 x 0.02 lb | 16.5" x 21.7" x 5.9" | 51.4 lb | 2895 | 2,413.00 |
| i-D33XW150C1L7 | 300 x 0.05 lb | 16.5" x 21.7" x 5.9" | 51.4 lb | 2896 | 2,413.00 |
| i-D33XW150C1X7 | 300 x 0.05 lb | 19.7" x 25.6" x 5.9" | 77.8 lb | 2897 | 2,972.00 |
| i-D33XW300C1X7 | 600 x 0.1 lb | 19.7" x 25.6" x 5.9" | 77.8 lb | 2898 | 2,972.00 |
| **Front mount indicator** | | | | | |
| i-D33XW15C1R5 | 30 x 0.005 lb | 12" x 14" x 4.8" | 31.5 lb | 3002 | 2,056.00 |
| i-D33XW30C1R5 | 60 x 0.01 lb | 12" x 14" x 4.8" | 31.5 lb | 3003 | 2,085.00 |
| i-D33XW75C1R5 | 150 x 0.02 lb | 12" x 14" x 4.8" | 31.5 lb | 3004 | 2,085.00 |
| i-D33XW75C1L5 | 150 x 0.02 lb | 16.5" x 21.7" x 5.9" | 48.9 lb | 3005 | 2,353.00 |
| i-D33XW150C1L5 | 300 x 0.05 lb | 16.5" x 21.7" x 5.9" | 48.9 lb | 3006 | 2,353.00 |
| i-D33XW150C1X5 | 300 x 0.05 lb | 19.7" x 25.6" x 5.9" | 75.6 lb | 3007 | 2,919.00 |
| i-D33XW300C1X5 | 600 x 0.1 lb | 19.7" x 25.6" x 5.9" | 75.6 lb | 3008 | 2,919.00 |
| **Options** | | | | | |
| 30699120 USB device interface kit | | | 1 lb | 3118 | 148.00 |
| 30429666 ethernet interface kit | | | 1 lb | 3119 | 262.00 |
| 30064203 printer, impact SF40A, AM | | | 2 lb | 1754 | 1,552.00 |
| 30699121 dust cover set(5) i-DT33 | | | 1 lb | 3122 | 74.00 |
| 30616409 wheel kit, stainless steel, up to 300 lb | | | 12 lb | 3123 | 262.00 |
| 30372146 wheel kit, Defender series | | | 8 lb | 3124 | 211.00 |
| **Service Parts** | | | | | |
| 30699120 indicator i-DT33XW | | | 9 lb | 2472 | 627.00 |

**D3XW15C1R6**
**Column mount**
**Bench/Floor**

**D33XW15C1R5**
**Front mount**
**Bench/Floor**

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

# Bench

**D33P75SD**
**Digital Field Test Scale**

OHAUS®

## Defender Digital Field Test Scale

Precise material testing in the construction industry. Portable with a durable plastic carrying case with carrying handle. Backlit LCD display allows for easy reading in low light conditions. The internal battery means that you can operate for 70 hours between recharges. Painted steel base with 150 lb capacity and 0.05 lb readability. You get high precistion, high capacity and portability.

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| D33P75SD | 150 lb x 0.05 lb | 12.4"Lx11"Wx1.77"H | 17.6 lb | 2137 | $ 538.00 |

OHAUS®

## Defender 5000 Washdown Bench Scales

Constructed with a stainless steel platform, frame, column, IP67 load cell and IP68/NEMA4X indicator. Keys for ON/ZERO/OFF, PRINT/UNITS, FUNCTION/MODE, TARE/MENU. Backlit LCD. Units for lb, oz, lb:oz, kg, g, metric ton, short ton, custom unit. Application modes: Weighing, Parts Counting, Checkweighing, Percent Weighing, Dynamic Weighing and Display hold. Supports GMP/GLP data output with Date, Statistics, Time, User ID, Project ID, Scale ID. Optional interfaces include DC relay control kit, AC relay kit, 2nd RS232 and RS422/485. Integral 100-240 VAC, 50-60Hz power supply. 2 year warranty
NTEP Legal for Trade 18-065, 5,000d, Indicator IP68
NTEP Legal for Trade 18-077, Platform IP67
Canada Indicator AM-6093, Platform AM-6107

| Part Number | Platform | Column | Capacity | Weight | SKU | List |
|---|---|---|---|---|---|---|
| D52XW2WQS6 | 10” x 10” | 13.8” | 5 x 0.001 lb | 24.3 lb | 4380 | $ 2,413.00 |
| D52XW5WQS6 | 10” x 10” | 13.8” | 10 x 0.002 lb | 24.3 lb | 4381 | 2,413.00 |
| D52XW12WQS6 | 10” x 10” | 13.8” | 25 x 0.005 lb | 24.3 lb | 4382 | 2,413.00 |
| D52XW12WQR6 | 12” x 12” | 13.8” | 25 x 0.005 lb | 26.5 lb | 4383 | 2,610.00 |
| D52XW25WQR6 | 12” x 12” | 13.8” | 50 x 0.01 lb | 26.5 lb | 4384 | 2,610.00 |
| D52XW50WQR6 | 12” x 12” | 13.8” | 100 x 0.02 lb | 26.5 lb | 4385 | 2,610.00 |
| D52XW25WQL7 | 18” x 18” | 26.8” | 50 x 0.01 lb | 46.3 lb | 4386 | 3,681.00 |
| D52XW50WQL7 | 18” x 18” | 26.8” | 100 x 0.02 lb | 46.3 lb | 4387 | 3,681.00 |
| D52XW125WQL7 | 18” x 18” | 26.8” | 250 x 0.05 lb | 72.8 lb | 4388 | 3,681.00 |
| D52XW50WTX7 | 18” x 24” | 26.8” | 100 x 0.02 lb | 72.8 lb | 4389 | 4,056.00 |
| D52XW125WTX7 | 18” x 24” | 26.8” | 250 x 0.05 lb | 72.8 lb | 4390 | 4,056.00 |
| D52XW250WTX7 | 18” x 24” | 26.8” | 500 x 0.1 lb | 72.8 lb | 4391 | 4,056.00 |
| D52XW50WQV8 | 24” x 24” | 38.6” | 100 x 0.02 lb | 99.2 lb | 4392 | 4,698.00 |
| D52XW125WQV8 | 24” x 24” | 38.6” | 250 x 0.05 lb | 99.2 lb | 4393 | 4,758.00 |
| D52XW250WQV8 | 24” x 24” | 38.6” | 500 x 0.1 lb | 99.2 lb | 4394 | 4,878.00 |
| D52XW500WQV8 | 24” x 24” | 38.6” | 1,000 x 0.2 lb | 99.2 lb | 4395 | 4,878.00 |

**Service Parts**

| | | | |
|---|---|---|---|
| 30097591 Discrete I/O Kit 2in/4 out | 1 lb | 7972 | 245.00 |
| 30064203 printer, impact SF40A, AM | 2 lb | 1754 | 1,552.00 |
| 80850080 WinWedge software | 1 lb | 2436 | 837.00 |
| 30424079 indicator TD52XW IP68/NEMA 4X stainless steel | 5.5 lb | 7016 | 1,294.00 |

**D52XW Washdown**

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

# Bench

**D52XW**
**Washdown**
**No column**

OHAUS®

## Defender 5000 Washdown Low Profile no column Bench Scales

Constructed with a stainless steel platform, frame, IP67 load cell and IP68/NEMA4X indicator. Keys for ON/ZERO/OFF, PRINT/UNITS, FUNCTION/MODE, TARE/MENU. Backlit LCD. Units for lb, oz, lb:oz, kg, g, metric ton, short ton, custom unit. Application modes: Weighing, Parts Counting, Checkweighing, Percent Weighing, Dynamic Weighing and Display hold. Supports GMP/GLP data output with Date, Statistics, Time, User ID, Project ID, Scale ID. Optional interfaces include DC relay control kit, AC relay kit, 2nd RS232 and RS422/485. Integral 100-240 VAC, 50-60Hz power supply. 2 year warranty.
NTEP Legal for Trade 18-065, 5,000d, Indicator IP68
NTEP Legal for Trade 18-077, Platform IP67
Canada Indicator AM-6093, Platform AM-6107

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| D52XW2WQS5 | 5 x 0.001 lb | 10” x 10” | 24.3 lb | 3717 | $ 2,472.00 |
| D52XW5WQS5 | 10 x 0.002 lb | 10” x 10” | 24.3 lb | 3718 | 2,472.00 |
| D52XW12WQS5 | 25 x 0.005 lb | 10” x 10” | 24.3 lb | 3719 | 2,472.00 |
| D52XW12WQR5 | 25 x 0.005 lb | 12” x 12” | 26.5 lb | 3720 | 2,675.00 |
| D52XW25WQR5 | 50 x 0.01 lb | 12” x 12” | 26.5 lb | 3721 | 2,675.00 |
| D52XW50WQR5 | 100 x 0.02 lb | 12” x 12” | 26.5 lb | 3722 | 2,675.00 |
| D52XW25WQL5 | 50 x 0.01 lb | 18” x 18” | 26.5 lb | 3723 | 3,376.00 |
| D52XW50WQL5 | 100 x 0.02 lb | 18” x 18” | 26.5 lb | 3724 | 3,376.00 |
| D52XW125WQL5 | 250 x 0.05 lb | 18” x 18” | 41.9 lb | 3725 | 3,376.00 |
| D52XW50WTX5 | 100 x 0.02 lb | 18” x 24” | 68.4 lb | 3726 | 3,948.00 |
| D52XW125WTX5 | 250 x 0.05 lb | 18” x 24” | 68.4 lb | 3727 | 3,948.00 |
| D52XW250WTX5 | 500 x 0.1 lb | 18” x 24” | 68.4 lb | 3728 | 3,948.00 |
| D52XW50WQV5 | 100 x 0.02 lb | 24” x 24” | 68.4 lb | 3729 | 4,520.00 |
| D52XW125WQV5 | 250 x 0.05 lb | 24” x 24” | 68.4 lb | 3730 | 4,520.00 |

**Service Parts**

| | | | |
|---|---|---|---|
| 30097591 Discrete I/O Kit 2in/4 out | 1 lb | 7972 | 245.00 |
| 30064203 SF40A Dot Matrix printer, includes RS232 cable | 2 lb | 1754 | 1,552.00 |
| 80850080 WinWedge software | 1 lb | 2436 | 837.00 |
| 30424079 indicator TD52XW IP68/NEMA 4X stainless steel | 5.5 lb | 7016 | 1,294.00 |

OHAUS®

## Defender 5000 Standard w/column w/SS indicator

Constructed with a stainless steel platform, powder coated steel frame, column, IP67 load cell and IP68/NEMA4X indicator. Keys for ON/ZERO/OFF, PRINT/UNITS, FUNCTION/MODE, TARE/MENU. Backlit LCD. Units for lb, oz, lb:oz, kg, g, metric ton, short ton, custom unit. Application modes: Weighing, Parts Counting, Checkweighing, Percent Weighing, Dynamic Weighing and Display hold. Supports GMP/GLP data output with Date, Statistics, Time, User ID, Project ID, Scale ID. Optional interfaces include DC relay control kit, AC relay kit, 2nd RS232 and RS422/485. Integral 100-240 VAC, 50-60Hz power supply. 2 year warranty
NTEP Legal for Trade 18-065, 5,000d, Indicator IP68
NTEP Legal for Trade 18-077, Platform IP67
Canada Indicator AM-6093, Platform AM-6107

| Part Number | Platform | Column | Capacity | Weight | SKU | List |
|---|---|---|---|---|---|---|
| D52XW12RQR1 | 12” x 12” | 13.8” | 25 x 0.005 lb | 26.5 lb | 7368 | $ 2,472.00 |
| D52XW25RQR1 | 12” x 12” | 13.8” | 50 x 0.01 lb | 26.5 lb | 7369 | 2,472.00 |
| D52XW50RQR1 | 12” x 12” | 13.8” | 100 x 0.02 lb | 26.5 lb | 7370 | 2,472.00 |
| D52XW12RTR1 | 12” x 14” | 13.8” | 25 x 0.005 lb | 28.7 lb | 7371 | 2,472.00 |
| D52XW25RTR1 | 12” x 14” | 13.8” | 50 x 0.01 lb | 28.7 lb | 7372 | 2,472.00 |
| D52XW50RTR1 | 12” x 14” | 13.8” | 100 x 0.02 lb | 28.7 lb | 7373 | 2,472.00 |
| D52XW50RQL1 | 18” x 18” | 26.8” | 100 x 0.02 lb | 44.1 lb | 7374 | 2,966.00 |
| D52XW125RQL1 | 18” x 18” | 26.8” | 250 x 0.05 lb | 44.1 lb | 7375 | 2,966.00 |
| D52XW50RTX2 | 18” x 24” | 26.8” | 100 x 0.02 lb | 68.3 lb | 7376 | 3,127.00 |
| D52XW125RTX2 | 18” x 24” | 26.8” | 250 x 0.05 lb | 68.3 lb | 7377 | 3,127.00 |
| D52XW250RTX2 | 18” x 24” | 26.8” | 500 x 0.1 lb | 68.3 lb | 7378 | 3,127.00 |
| D52XW50RQV3 | 24” x 24” | 38.6” | 100 x 0.02 lb | 94.8 lb | 7379 | 3,376.00 |
| D52XW125RQV3 | 24” x 24” | 38.6” | 250 x 0.05 lb | 94.8 lb | 7380 | 3,376.00 |
| D52XW250RQV3 | 24” x 24” | 38.6” | 500 x 0.1 lb | 94.8 lb | 7381 | 3,376.00 |
| D52XW500RQV3 | 24” x 24” | 38.6” | 1,000 x 0.2 lb | 94.8 lb | 7382 | 3,376.00 |
| D52XW125RTV3 | 23.6” x 31.5” | 38.6” | 250 x 0.05 lb | 114.6 lb | 7383 | 4,199.00 |
| D52XW250RTV3 | 23.6” x 31.5” | 38.6” | 500 x 0.1 lb | 114.6 lb | 7384 | 4,199.00 |
| D52XW500RTV3 | 23.6” x 31.5” | 38.6” | 1,000 x 0.2 lb | 114.6 lb | 7385 | 4,199.00 |

**Service Parts**

| | | | |
|---|---|---|---|
| 30097591 Discrete I/O Kit 2in/4 out | 1 lb | 7972 | 245.00 |
| 30064203 SF40A Dot Matrix printer, includes RS232 cable | 2 lb | 1754 | 1,552.00 |
| 80850080 WinWedge software | 1 lb | 2436 | 837.00 |
| 30424079 indicator TD52XW IP68/NEMA 4X stainless steel | 5.5 lb | 7016 | 1,294.00 |

**D52XW Standard w/column w/SS indicator**

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

# Bench

**D52P**
**w/column**
**ABS indicator**

OHAUS®

## Defender 5000 Standard w/column w/ABS indicator

Constructed with a stainless steel platform, powder coated steel frame, column, IP67 load cell and IP68/NEMA4X indicator. Keys for ON/ZERO/OFF, PRINT/UNITS, FUNCTION/MODE, TARE/MENU. Backlit LCD. Units for lb, oz, lb:oz, kg, g, metric ton, short ton, custom unit. Application modes: Weighing, Parts Counting, Checkweighing, Percent Weighing, Dynamic Weighing and Display hold. Supports GMP/GLP data output with Date, Statistics, Time, User ID, Project ID, Scale ID. Optional interfaces include DC relay control kit, AC relay kit, 2nd RS232 and RS422/485. Integral 100-240 VAC, 50-60Hz power supply. 2 year warranty
NTEP Legal for Trade 18-065, 5,000d, Indicator IP68
NTEP Legal for Trade 18-077, Platform IP67
Canada Indicator AM-6093, Platform AM-6107

| Part Number | Platform | Column | Capacity | Weight | SKU | List |
|---|---|---|---|---|---|---|
| D52P12RQR1 | 12” x 12” | 13.8” | 25 x 0.005 lb | 24.3 lb | 3231 | $ 2,216.00 |
| D52P25RQR1 | 12” x 12” | 13.8” | 50 x 0.01 lb | 24.3 lb | 3232 | 2,216.00 |
| D52P50RQR1 | 12” x 12” | 13.8” | 100 x 0.02 lb | 24.3 lb | 3233 | 2,216.00 |
| D52P12RTR1 | 12” x 14” | 13.8” | 25 x 0.005 lb | 26.5 lb | 3234 | 2,216.00 |
| D52P25RTR1 | 12” x 14” | 13.8” | 50 x 0.01 lb | 26.5 lb | 3235 | 2,216.00 |
| D52P50RTR1 | 12” x 14” | 13.8” | 100 x 0.02 lb | 26.5 lb | 3236 | 2,216.00 |
| D52P50RQL2 | 18” x 18” | 26.8” | 100 x 0.02 lb | 41.9 lb | 3237 | 2,704.00 |
| D52P125RQL2 | 18” x 18” | 26.8” | 250 x 0.05 lb | 41.9 lb | 3238 | 2,704.00 |
| D52P50RTX2 | 18” x 24” | 26.8” | 100 x 0.02 lb | 26.5 lb | 3239 | 2,854.00 |
| D52P125RTX2 | 18” x 24” | 26.8” | 250 x 0.05 lb | 26.5 lb | 3240 | 2,854.00 |
| D52P250RTX2 | 18” x 24” | 26.8” | 500 x 0.1 lb | 26.5 lb | 3241 | 2,854.00 |
| D52P50RQV3 | 24” x 24” | 38.6” | 100 x 0.02 lb | 92.6 lb | 3242 | 3,277.00 |
| D52P125RQV3 | 24” x 24” | 38.6” | 250 x 0.05 lb | 92.6 lb | 3243 | 3,277.00 |
| D52P250RQV3 | 24” x 24” | 38.6” | 500 x 0.1 lb | 92.6 lb | 3244 | 3,277.00 |
| D52P500RQV3 | 24” x 24” | 38.6” | 1,000 x 0.2 lb | 92.6 lb | 3245 | 3,277.00 |
| D52P125RTV3 | 23.6” x 31.5” | 38.6” | 250 x 0.05 lb | 112.4 lb | 3246 | 3,926.00 |
| D52P250RTV3 | 23.6” x 31.5” | 38.6” | 500 x 0.1 lb | 112.4 lb | 3247 | 3,926.00 |
| D52P500RTV3 | 23.6” x 31.5” | 38.6” | 1,000 x 0.2 lb | 112.4 lb | 3248 | 3,926.00 |

**Service Parts**

| | | | |
|---|---|---|---|
| 30424078 indicator TD52P plastic case | 3.75 lb | 7132 | 1,056.00 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.


www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp®
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

OHAUS®

## Defender 5000 Standard no column w/SS indicator

Constructed with a stainless steel platform, powder coated steel frame, IP67 aluminum load cell and IP68/NEMA4X indicator. Keys for ON/ZERO/OFF, PRINT/UNITS, FUNCTION/MODE, TARE/MENU. Backlit LCD. Units for lb, oz, lb:oz, kg, g, metric ton, short ton, custom unit. Application modes: Weighing, Parts Counting, Checkweighing, Percent Weighing, Dynamic Weighing and Display hold. Supports GMP/GLP data output with Date, Statistics, Time, User ID, Project ID, Scale ID. Optional interfaces include DC relay control kit, AC relay kit, 2nd RS232 and RS422/485. Integral 100-240 VAC, 50-60Hz power supply. 2 year warranty
NTEP Legal for Trade 18-065, 5,000d, Indicator IP68
NTEP Legal for Trade 18-077, Platform IP67
Canada Indicator AM-6093, Platform AM-6107

**D52XW w/SS indicator**

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| D52XW12RQR5 | 25 x 0.005 lb | 12” x 12” | 24.3 lb | 4263 | $ 2,347.00 |
| D52XW25RQR5 | 50 x 0.01 lb | 12” x 12” | 24.3 lb | 4264 | 2,347.00 |
| D52XW50RQR5 | 100 x 0.02 lb | 12” x 12” | 24.3 lb | 4265 | 2,347.00 |
| D52XW12RTR5 | 25 x 0.005 lb | 12” x 14” | 26.5 lb | 4266 | 2,435.00 |
| D52XW25RTR5 | 50 x 0.01 lb | 12” x 14” | 26.5 lb | 4267 | 2,435.00 |
| D52XW50RTR5 | 100 x 0.02 lb | 12” x 14” | 26.5 lb | 4268 | 2,435.00 |
| D52XW50RQL5 | 100 x 0.02 lb | 18” x 18” | 39.7 lb | 4269 | 2,800.00 |
| D52XW125RQL5 | 250 x 0.05 lb | 18” x 18” | 39.7 lb | 4270 | 2,800.00 |
| D52XW50RTX5 | 100 x 0.02 lb | 18” x 24” | 61.7 lb | 4271 | 2,966.00 |
| D52XW125RTX5 | 250 x 0.05 lb | 18” x 24” | 61.7 lb | 4272 | 2,966.00 |
| D52XW250RTX5 | 500 x 0.1 lb | 18” x 24” | 61.7 lb | 4273 | 2,966.00 |
| D52XW50RQV5 | 100 x 0.02 lb | 24” x 24” | 83.8 lb | 4274 | 3,122.00 |
| D52XW125RQV5 | 250 x 0.05 lb | 24” x 24” | 83.8 lb | 4275 | 3,122.00 |
| D52XW250RQV5 | 500 x 0.1 lb | 24” x 24” | 83.8 lb | 4276 | 3,122.00 |
| D52XW125RTV5 | 250 x 0.05 lb | 23.6” x 31.5” | 103.6 lb | 4277 | 3,700.00 |

**Service Parts**

| | | | | |
|---|---|---|---|---|
| 30424079 indicator TD52XW IP68/NEMA 4X stainless steel | | 5.5 lb | 7016 | 1,294.00 |

# Bench

**D52P**
**ABS indicator**

## Defender 5000 Standard no column w/ABS indicator

Constructed with a stainless steel platform, powder coated steel frame, aluminum IP67 load cell and ABS plastic indicator. Keys for ON/ZERO/OFF, PRINT/UNITS, FUNCTION/MODE, TARE/MENU. Backlit LCD. Units for lb, oz, lb:oz, kg, g, metric ton, short ton, custom unit. Application modes: Weighing, Parts Counting, Checkweighing, Percent Weighing, Dynamic Weighing and Display hold. Supports GMP/GLP data output with Date, Statistics, Time, User ID, Project ID, Scale ID. Optional interfaces include DC relay control kit, AC relay kit, 2nd RS232 and RS422/485. Integral 100-240 VAC, 50-60Hz power supply. 2 year warranty
NTEP Legal for Trade 18-065, 5,000d, Indicator IP68
NTEP Legal for Trade 18-077, Platform IP67
Canada Indicator AM-6093, Platform AM-6107

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| D52P12RQR5 | 25 x 0.005 lb | 12” x 12” | 22.0 lb | 5307 | $ 2,042.00 |
| D52P25RQR5 | 50 x 0.01 lb | 12” x 12” | 22.0 lb | 5308 | 2,042.00 |
| D52P50RQR5 | 100 x 0.02 lb | 12” x 12” | 22.0 lb | 5309 | 2,042.00 |
| D52P12RTR5 | 25 x 0.005 lb | 12” x 14” | 24.3 lb | 5310 | 2,127.00 |
| D52P25RTR5 | 50 x 0.01 lb | 12” x 14” | 24.3 lb | 5311 | 2,127.00 |
| D52P50RTR5 | 100 x 0.02 lb | 12” x 14” | 24.3 lb | 5312 | 2,127.00 |
| D52P50RQL5 | 100 x 0.02 lb | 18” x 18” | 37.5 lb | 5313 | 2,501.00 |
| D52P125RQL5 | 250 x 0.05 lb | 18” x 18” | 37.5 lb | 5314 | 2,501.00 |
| D52P50RTX5 | 100 x 0.02 lb | 18” x 24” | 59.5 lb | 5315 | 2,615.00 |
| D52P125RTX5 | 250 x 0.05 lb | 18” x 24” | 59.5 lb | 5316 | 2,615.00 |
| D52P250RTX5 | 500 x 0.1 lb | 18” x 24” | 59.5 lb | 5317 | 2,615.00 |
| D52P50RQV5 | 100 x 0.02 lb | 24” x 24” | 81.6 lb | 5318 | 2,793.00 |
| D52P125RQV5 | 250 x 0.05 lb | 24” x 24” | 81.6 lb | 5319 | 2,793.00 |
| D52P250RQV5 | 500 x 0.1 lb | 24” x 24” | 81.6 lb | 5320 | 2,793.00 |
| D52P125RTV5 | 250 x 0.05 lb | 23.6” x 31.5” | 101.4 lb | 5321 | 3,686.00 |
| **Options** | | | | | |
| 30412537 WiFi/BT dongle requires 30424406 | | | 1.00 lb | 5337 | 362.00 |
| 30424406 USB Host for dongle TD52 | | | 1.00 lb | 5338 | 222.00 |
| **Service Parts** | | | | | |
| 30424078 indicator TD52P plastic case | | | 3.75 lb | 7132 | 1,056.00 |

**D71P15HR5**
**Indicator ABS plastic**
**Base, painted**

## Defender 7000 Rectangular base

Numeric keypad with alphanumeric text entry. Keys for ON/ZERO/OFF, PRINT/UNITS, FUNCTION/MODE, TARE/MENU, LIBRARY/EXIT. Three color LED's for over/under. Dual line backlit LCD with multi-language support. Units for lb, lb:oz, kg, g, T & Custom. Weighing modes: Static with single or dual resolution and up to 50,000 display divisions plus 10X temporary resolution increase, Dynamic Weighing, 500,000 div Counting Resolution with second scale connection, Checkweighing, Percent, Display Hold & Accumulation. Library storage for up to 255 records. Supports GMP/GLP data output with Date, Statistics, Time, User ID, Project ID, Scale ID. Optional interfaces include DC relay control kit, AC relay kit, 2nd RS232 and RS422/485. Integral 100-240 VAC, 50-60Hz power supply. 2 year warranty.
NTEP Legal for Trade 09-102, 10,000 III Indicator
NTEP Legal for Trade 99-203A3, 3,000 III Base

**Plastic indicator with bracket & painted base (6C Cells)**

| Part Number | Platform | Capacity | Weight | SKU | List |
|---|---|---|---|---|---|
| D71P15HR5 | 12” x 14” | 30 x 0.005 lb | 36 lb | 7879 | $ 1,095.00 |
| **Service Parts** | | | | | |
| 30126959 indicator T72XW SS | | | 9 lb | 7618 | 1,371.00 |
| 30132164 USB I/O kit T72RW | | | 1 lb | 7619 | 274.00 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.


www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287
Totalcomp
Scales & Balances
13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

OHAUS®

## CQ31 Multi Functional Bench Scale

Complete scale composed of the Ohaus CD-31 indicator, Ohaus base and 9 ft of load cell cable. Base has **stainless steel** platform with painted steel frame. Weighing units: lb, g, kg, user programmable custom unit. Application modes: % weighing, checkweighing, parts counting, dynamic weighing. Front panel switches are ENTER, PRINT, TARE, >0<, MODE, SETUP, GTN, UNITS. RS232 bidirectional interface. Digital calibration for zero and span. 2 Year warranty. 120 VAC adapter(included), 50/60 Hz.
Canadian AM-5422 & AM-5339
NTEP Legal for Trade 01-049 III/IIIL 5,000 div. Recalibration is required for NTEP use.

| Part Number | Factory | NTEP | Weight | SKU | List |
|---|---|---|---|---|---|
| **24" x 24" Platform,** 6.4"H | | | | | |
| CQ250XL31 | 500 x 0.05 lb | 500 x 0.1 lb | 83 lb | 4255 | $ 1,390.00 |
| **Service Parts** | | | | | |
| 46001802 AC adapter 120 VAC w/o prong set | | | 1 lb | 716 | 98.00 |
| 46001780 Prong set, International | | | 1 lb | 714 | 36.00 |
| 46001776 Prong set, US only | | | 1 lb | 6226 | 36.00 |

**CQ50L31**
**Bench/Floor**



13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

# Bench



Totalcomp

TB Bench Scale
w/ optional column

TB 1212/1214

TB Bench scale
TRWS Indicator
TBT Base
Stainless Steel
w/ optional column

TB 1616/2424

## TB All Stainless Steel

All **stainless steel** base and heavy guage **stainless steel** pan. Has TRWS indicator with **Stainless steel** load cell. Integral overload protection is provided for both static and dynamic overloads.
Adjustable rubber feet. Bubble level.
2 mv/v, 0.02% total error, 385/350 ohms, 9 ft 6 conductor cable.
NTEP Legal for Trade 13-090 Class III 6,000 div (Indicator)
NTEP Legal for Trade 14-050 Class III 5,000 div (Platform)

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| **12" x 12" Platform** x 4.25" High | | | | |
| TB-1212-15-SS | 15 x 0.005 lb | 34 lb | 7773 | $ 692.00 |
| TB-1212-30-SS | 30 x 0.01 lb | 34 lb | 7774 | 692.00 |
| TB-1212-50-SS | 50 x 0.01 lb | 34 lb | 7775 | 692.00 |
| TB-1212-100-SS | 100 x 0.02 lb | 34 lb | 7776 | 692.00 |
| TB-1212-200-SS | 200 x 0.05 lb | 34 lb | 7777 | 692.00 |
| **12" x 14" Platform** x 4.25" High | | | | |
| TB-1214-15-SS | 15 x 0.005 lb | 37 lb | 7778 | 709.00 |
| TB-1214-30-SS | 30 x 0.01 lb | 37 lb | 7779 | 709.00 |
| TB-1214-50-SS | 50 x 0.01 lb | 37 lb | 7780 | 709.00 |
| TB-1214-100-SS | 100 x 0.02 lb | 37 lb | 7781 | 709.00 |
| TB-1214-200-SS | 200 x 0.05 lb | 37 lb | 7782 | 709.00 |
| **16" x 16" Platform** x 4.25" High | | | | |
| TB-1616-15-SS | 15 x 0.005 lb | 39 lb | 7783 | 725.00 |
| TB-1616-30-SS | 30 x 0.01 lb | 39 lb | 7784 | 725.00 |
| TB-1616-50-SS | 50 x 0.01 lb | 39 lb | 7785 | 725.00 |
| TB-1616-100-SS | 100 x 0.02 lb | 39 lb | 7786 | 725.00 |
| TB-1616-300-SS | 300 x 0.05 lb | 39 lb | 7787 | 725.00 |
| **24" x 24" Platform** x 4.25" High | | | | |
| TB-2424-100-SS | 100 x 0.02 lb | 94 lb | 7788 | 1,121.00 |
| TB-2424-200-SS | 200 x 0.05 lb | 94 lb | 7789 | 1,121.00 |
| TB-2424-250-SS | 250 x 0.05 lb | 94 lb | 7790 | 1,121.00 |
| TB-2424-500-SS | 500 x 0.1 lb | 94 lb | 7791 | 1,121.00 |
| TB-2424-1000-SS | 1,000 x 0.2 lb | 94 lb | 7792 | 1,121.00 |
| **Options** | | | | |
| TBT-1212/1214 SS square column 8" high | | 4 lb | 7661 | 56.27 |
| TBT-1616/2424-SS column 13" high | | 4 lb | 6885 | 68.53 |
| TBT-1616/2424 SS column 23" high | | 4 lb | 7662 | 77.20 |
| TBT-1616/2424 SS column 26" high | | 4 lb | 7663 | 82.75 |
| **Service Parts** | | | | |
| **Foot for 12" x 12" + 12" x 14"** | | | | |
| TB-M10-SPB-SS foot M10, 2 1/8" dia | | 1 lb | 7673 | 6.88 |
| **Foot for 16" x 16" + 24" x 24"** | | | | |
| TB-M12-SPB-SS foot M12, 2 3/4" dia | | 1 lb | 7660 | 7.02 |
| TB-M12-PB-MS foot M12, 2 3/4" dia | | 1 lb | 7666 | 7.16 |

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287



13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

Totalcomp

## TBP Painted Mild Steel

Painted mild steel base and heavy gauge stainless steel pan. has TWP indicator with ABS plastic enclosure, Aluminum or nickel plated steel load cell. Integral overload protection is provided for both static and dynamic overloads. Adjustable rubber feet. Bubble level.
2 mv/v, 0.02% total error, 405/350 ohms, 9 ft 6 conductor cable.
NTEP Legal for Trade 13-091 Class III 6,000 div (Indicator)
NTEP Legal for Trade 14-050 Class III 5,000 div (Platform)

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| **16" x 16" Platform** x 4.75" High w/ aluminum load cell | | | | |
| TBP-1616-50-CS | 50 x 0.005 lb | 33 lb | 7793 | $ 373.00 |
| TBP-1616-100-CS | 100 x 0.01 lb | 33 lb | 7794 | 373.00 |
| TBP-1616-200-CS | 200 x 0.02 lb | 33 lb | 7795 | 373.00 |
| TBP-1616-400-CS | 400 x 0.05 lb | 33 lb | 7796 | 373.00 |
| **24" x 24" Platform** x 5.5" High w/ nickel plated steel load cell | | | | |
| TBP-2424-100-CS | 100 x 0.01 lb | 85 lb | 7797 | 685.00 |
| TBP-2424-200-CS | 200 x 0.02 lb | 85 lb | 7798 | 685.00 |
| TBP-2424-250-CS | 250 x 0.05 lb | 85 lb | 7799 | 685.00 |
| TBP-2424-500-CS | 500 x 0.05 lb | 85 lb | 7800 | 685.00 |
| TBP-2424-1000-CS | 1,000 x 0.1 lb | 85 lb | 7801 | 685.00 |
| **Options** | | | | |
| TBT-1616/2424-SS pole and bracket 13" high | | 4 lb | 6885 | 68.53 |
| TBT-1616/2424 SS pole and bracket 23" high | | 4 lb | 7662 | 77.20 |
| TBT-1616/2424 SS pole and bracket 26" high | | 4 lb | 7663 | 82.76 |
| **Service Parts** | | | | |
| **Foot for 16" x 16" + 24" x 24"** | | | | |
| TBT-M12-SPB-SS foot M12, 2 3/4" dia | | 1 lb | 7660 | 7.02 |
| TBT-M12-PB-MS foot M12, 2 3/4" dia | | 1 lb | 7666 | 7.16 |

**TB 1616/2424**
**TBP Bench scale**
**TWP Indicator, plastic**
**TBT Base, painted**
**w/ optional column**

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

# Bench

**TBL-1212/1214**
**TBL Bench Scale**
**w/ optional column**

**TBL Bench scale**
**TLI Indicator**
**TBT Base**
**Stainless Steel**
**w/ optional column**

**TBL 1616/2424**

Totalcomp

## TBL All Stainless Steel

All **stainless steel** base and heavy guage **stainless steel** pan. Has TLI indicator with stainless steel enclosure and rechargeable battery **Stainless steel** load cell. Integral overload protection is provided for both static and dynamic overloads.
Adjustable rubber feet. Bubble level.
2 mv/v, 0.02% total error, 385/350 ohms, 9 ft 6 conductor cable.
NTEP Legal for Trade 13-091 Class III 6,000 div (Indicator)
NTEP Legal for Trade 14-050 Class III 5,000 div (Platform)

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| **12" x 12" Platform** x 4.25" High | | | | |
| TBL-1212-15-SS | 15 x 0.002 lb | 34 lb | 8197 | $ 730.00 |
| TBL-1212-30-SS | 30 x 0.005 lb | 34 lb | 8198 | 730.00 |
| TBL-1212-50-SS | 50 x 0.005 lb | 34 lb | 8199 | 730.00 |
| TBL-1212-100-SS | 100 x 0.01 lb | 34 lb | 8200 | 730.00 |
| TBL-1212-200-SS | 200 x 0.02 lb | 34 lb | 8201 | 730.00 |
| **12" x 14" Platform** x 4.25" High | | | | |
| TBL-1214-50-SS | 50 x 0.005 lb | 37 lb | 8204 | 746.00 |
| TBL-1214-100-SS | 100 x 0.01 lb | 37 lb | 8205 | 746.00 |
| TBL-1214-200-SS | 200 x 0.02 lb | 37 lb | 8206 | 746.00 |
| **16" x 16" Platform** x 4.25" High | | | | |
| TBL-1616-15-SS | 15 x 0.002 lb | 39 lb | 8207 | 756.00 |
| TBL-1616-30-SS | 30 x 0.005 lb | 39 lb | 8208 | 756.00 |
| TBL-1616-50-SS | 50 x 0.005 lb | 39 lb | 8209 | 756.00 |
| TBL-1616-100-SS | 100 x 0.01 lb | 39 lb | 8210 | 756.00 |
| TBL-1616-300-SS | 300 x 0.02 lb | 39 lb | 8211 | 756.00 |
| **24" x 24" Platform** x 4.25" High | | | | |
| TBL-2424-100-SS | 100 x 0.01 lb | 94 lb | 8212 | 1,195.00 |
| TBL-2424-250-SS | 250 x 0.05 lb | 94 lb | 8213 | 1,195.00 |
| TBL-2424-500-SS | 500 x 0.05 lb | 94 lb | 8214 | 1,195.00 |
| TBL-2424-1000-SS | 1,000 x 0.1 lb | 94 lb | 8215 | 1,195.00 |
| **Options** | | | | |
| TBT-1212/1214-SS square column 8" high | | 4 lb | 7661 | 56.27 |
| TBT-1616/2424-SS column 13" high | | 4 lb | 6885 | 68.53 |
| TBT-1616/2424-SS column 23" high | | 4 lb | 7662 | 77.20 |
| TBT-1616/2424-SS column 26" high | | 4 lb | 7663 | 82.76 |
| **Service Parts** | | | | |
| **Foot for 12" x 12" + 12" x 14"** | | | | |
| TB-M10-SPB-SS foot M10, 2 1/8" dia | | 1 lb | 7673 | 6.88 |
| **Foot for 16" x 16" + 24" x 24"** | | | | |
| TB-M12-SPB-SS foot M12, 2 3/4" dia | | 1 lb | 7660 | 7.02 |
| TB-M12-PB-MS foot M12, 2 3/4" dia | | 1 lb | 7666 | 7.16 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.


www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

doran

## 7400 Stainless Steel Digital Bench Scale

Advanced features. One button, easy to operate. Quad spring base, 1000% overload protection. Checkweigh indicators. Zero band checkweighing is an included feature with OVER/ACCEPT/UNDER. LB, KG, OZ, LB & OZ weight display. IP69K/NEMA 4X washdown safe 304 stainless steel construction. 115 VAC, 60 Hz, 10 watts.
NTEP Legal for Trade 99-129A2 Class III 5,000 div (7400M)
NTEP Legal for Trade 97-097A1 Class III 5,000 div (15 x 15 )
NTEP Legal for Trade TEP 97-097A Class III 5,000 div
NTEP Legal for Trade 02-086 Class III 3,000 div (18 x 18)
NTEP Legal for Trade 05-062 Class III 3,000 div (18 x 24, 24 x 24)
Canadian approval AM-5241, AM-5347
Canadian approval AM-5188, AM-5241, AM-5475

**7400 Stainless Steel Digital Bench Scale**

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| **10" x 10" Platform w/U bracket** | | | | | |
| 7402* | 2 x 0.0005 lb | 10" x 10" | 21 lb | 6827 | $ 1,585.00 |
| 7405* | 5 x 0.001 lb | 10" x 10" | 21 lb | 6828 | 1,585.00 |
| 7410* | 10 x 0.002 lb | 10" x 10" | 21 lb | 6829 | 1,585.00 |
| * Includes up overload stop | | | | | |
| 7425 | 25 x 0.005 lb | 10" x 10" | 21 lb | 6830 | 1,585.00 |
| 7450 | 50 x 0.01 lb | 10" x 10" | 21 lb | 6831 | 1,585.00 |
| **12" x 12" Platform w/U bracket** | | | | | |
| 7450/12 | 50 x 0.01 lb | 12" x 12" | 26 lb | 6832 | 1,695.00 |
| 74100/12 | 100 x 0.02 lb | 12" x 12" | 26 lb | 6833 | 1,695.00 |
| **15" x 15" Platform w/U bracket** | | | | | |
| 7450/15 | 50 x 0.01 lb | 15" x 15" | 41 lb | 6834 | 2,015.00 |
| 74100/15 | 100 x 0.02 lb | 15" x 15" | 41 lb | 6835 | 2,015.00 |
| 74200/15 | 200 x 0.05 lb | 15" x 15" | 41 lb | 6836 | 2,015.00 |
| **15" x 15" Platform w/20" column** | | | | | |
| 7450/15-C20 | 50 x 0.01 lb | 15" x 15" | 71 lb | 6837 | 2,310.00 |
| 74100/15-C20 | 100 x 0.02 lb | 15" x 15" | 71 lb | 6838 | 2,310.00 |
| 74200/15-C20 | 200 x 0.05 lb | 15" x 15" | 71 lb | 6839 | 2,310.00 |
| Shipped in 2 cartons 19" x 19" x 16" and 14" x 15" x 28", 41 lb and 30 lb. | | | | | |
| **18" x 18" Platform w/20" column** | | | | | |
| 74100/18S-C20 | 100 x 0.02 lb | 18" x 18" | 87 lb | 6841 | 2,585.00 |
| 74250/18S-C20 | 250 x 0.02 lb | 18" x 18" | 87 lb | 6842 | 2,585.00 |
| 74500/18S-C20 | 500 x 0.05 lb | 18" x 18" | 87 lb | 6843 | 2,585.00 |
| Shipped in 2 cartons 21" x 21" x 17" and 14" x 15" x 28", 69 lb and 30 lb. | | | | | |
| **18" x 24" Platform w/20" column** | | | | | |
| 74250/1824-C20 | 250 x 0.05 lb | 18" x 24" | 105 lb | 6844 | 2,805.00 |
| 74500/1824-C20 | 500 x 0.1 lb | 18" x 24" | 105 lb | 6845 | 2,805.00 |
| Shipped in 2 cartons 28" x 28" x 9" and 14" x 15" x 28", 75 lb and 30 lb. | | | | | |
| **24" x 24" Platform w/20" column** | | | | | |
| 74250/2424-C20 | 250 x 0.05 lb | 24" x 24" | 116 lb | 6847 | 3,165.00 |
| 74500/2424-C20 | 500 x 0.1 lb | 24" x 24" | 116 lb | 6848 | 3,165.00 |
| 741000/2424-C20 | 1,000 x 0.2 lb | 24" x 24" | 116 lb | 6849 | 3,165.00 |
| Shipped in 2 cartons 30" x 28" x 16" and 14" x 15" x 28", 86 lb and 30 lb. | | | | | |
| * Includes up overload stop. | | | | | |
| **Service Parts** | | | | | |
| 7400M Digital Weight Indicator | | | 10 lb | 6563 | 895.00 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.

# Bench

**7010XL**
**Bench/Floor**

doran

## 7000XL Stainless Steel Bench/Floor Scale

Rugged 304 Washdown Safe **Stainless Steel** construction. Displays Weight In lb, kg, oz, g or lb & oz. Front panel keys: ZERO, PRINT, UNITS. Shockproof base with Quad Spring design that protects against shock and overload damage. 120 VAC, 60 Hz. Indicator 6" x 10" x 3"D 10 lb.
Canadian approval AM-5188, AM-5241
NTEP Legal for Trade 91-106 III 5,000 div (5 lb to 200 lb only)

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| **10" x 10" Platform** | | | | | |
| 7002XL | 2 lb x 0.0005 lb | 10" x 10" | 21 lb | 6193 | $ 1,485.00 |
| 7005XL | 5 lb x 0.001 lb | 10" x 10" | 21 lb | 3626 | 1,485.00 |
| 7010XL | 10 lb x 0.002 lb | 10" x 10" | 21 lb | 3627 | 1,485.00 |
| 7025XL | 25 lb x 0.005 lb | 10" x 10" | 21 lb | 3628 | 1,485.00 |
| 7050XL | 50 lb x 0.01 lb | 10" x 10" | 21 lb | 3629 | 1,485.00 |
| **12" x 12" Platform** | | | | | |
| 7050XL/12 | 50 lb x 0.01 lb | 12" x 12" | 26 lb | 3630 | 1,595.00 |
| 70100XL/12 | 100 lb x 0.02 lb | 12" x 12" | 26 lb | 3631 | 1,595.00 |
| **15" x 15" Platform** | | | | | |
| 7050XL/15 | 50 lb x 0.01 lb<br>22.7kg x 5g | 15" x 15" | 42 lb | 2128 | 1,915.00 |
| 7100XL/15 | 100 lb x 0.02 lb<br>45kg x 10g | 15" x 15" | 42 lb | 2129 | 1,915.00 |
| 7200XL/15 | 200 lb x 0.05 lb<br>91kg x 20g | 15" x 15" | 42 lb | 2130 | 1,915.00 |
| **15" x 15" Platform** | | | | | |
| 7050XL/15-C20 | 50 x 0.01 lb | 15" x 15" | 54 lb | 3633 | 2,210.00 |
| 7100XL/15-C20 | 100 x 0.02 lb | 15" x 15" | 54 lb | 3634 | 2,210.00 |
| 7200XL/15-C20 * | 200 x 0.05 lb | 15" x 15" | 54 lb | 3635 | 2,210.00 |
| Shipped in 2 cartons 19" x 19" x 16" and 14" x 15" x 28", 41 lb and 30 lb. | | | | | |
| **18" x 18" Platform** | | | | | |
| 7100XL/18S-C20 | 100 x 0.02 lb | 18" x 18" | 60 lb | 3636 | 2,485.00 |
| 7250XL/18S-C20 * | 250 x 0.05 lb | 18" x 18" | 60 lb | 3637 | 2,485.00 |
| 7500XL/18S-C20 | 500 x 0.1 lb | 18" x 18" | 60 lb | 3638 | 2,485.00 |
| Shipped in 2 cartons 21" x 21" x 17" and 14" x 15" x 28", 69 lb and 30 lb. | | | | | |
| **18" x 24" Platform** | | | | | |
| 7250XL/1824-C20 | 250 x 0.05 lb | 18" x 24" | 75 lb | 3641 | 2,705.00 |
| 7500XL/1824 -C20* | 500 x 0.1 lb | 18" x 24" | 75 lb | 3642 | 2,705.00 |
| Shipped in 2 cartons 28" x 28" x 9" and 14" x 15" x 28", 75 lb and 30 lb. | | | | | |
| **24" x 24" Platform** | | | | | |
| 7250XL/2424-C20 | 250 x 0.05 lb | 24" x 24" | 84 lb | 3646 | 3,065.00 |
| 7500XL/2424-C20 * | 500 x 0.1 lb | 24" x 24" | 84 lb | 3647 | 3,065.00 |
| 71000XL/2424-C20* | 1,000 x 0.2 lb | 24" x 24" | 84 lb | 3648 | 3,065.00 |
| Shipped in 2 cartons 30" x 28" x 16" and 14" x 15" x 28", 86 lb and 30 lb. | | | | | |

* This model does not have lb & oz weight display capability.
* Not NTEP

| **Service Parts** | | | |
|---|---|---|---|
| 7000XLM Digital Indicator | 10 lb | 3632 | 795.00 |
| SUB0427 Touch Panel for 7000XLS (4) screws | 1 lb | 4106 | 240.00 |
| SUB0846 Touch Panel for 7000XL (12) screws | 0.47 lb | 4107 | 131.43 |
| ENC 0148 platter 10" x 10" | 3 lb | 3671 | 135.00 |
| SUB0210-1 large knob kit (1) knob (1)washer | 0.07 lb | 4049 | 14.30 |
| SUB0210-2 small knob kit (2) knobs (2)washers | 0.07 lb | 4050 | 23.90 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.


www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

doran

## 2200 Bench Scale

Washdown safe 304 stainless steel construction. Displays weight in lb, oz, kg, g, lb & oz. 6 digit, red LED 0.56" high. Keys are: TARE, GROSS/NET, ZERO, PRINT, UNITS, ACCUM, ID, CLEAR, ENTER, SET POINT, DECIMAL POINT, KEYPAD 0-9. Indicators are: Net, zero, batt, mot. Bi-directional RS232 serial ports. Eight digital outputs. Internal rechargeable battery. 115VAC, 50/60 Hz. 2 year warranty
Indicator size 6"H x 10"W x 3"D
NTEP Legal for Trade Indicator 06-101A1 Base 05-062

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| **10" x 10" platform** | | | | |
| 22002-C14 | 2 x 0.0005 lb | 21 lb | 7208 | $ 1,760.00 |
| 22005-C14 | 5 x 0.001 lb | 21 lb | 7209 | 1,760.00 |
| 22010-C14 | 10 x 0.002 lb | 21 lb | 7210 | 1,760.00 |
| 22025-C14 | 25 x 0.005 lb | 21 lb | 7211 | 1,760.00 |
| 22050-C14 | 50 x 0.01 lb | 21 lb | 7212 | 1,760.00 |
| **12" x 12" platform** | | | | |
| 22050/12-C14 | 50 x 0.01 lb | 26 lb | 7213 | 1,870.00 |
| 22100/12-C14 | 100 x 0.02 lb | 26 lb | 7214 | 1,870.00 |
| **15" x 15" platform** | | | | |
| 22050/15-C14 | 50 x 0.01 lb | 41 lb | 7215 | 2,190.00 |
| 22100/15-C14 | 100 x 0.02 lb | 41 lb | 7216 | 2,190.00 |
| 22200/15-C14 | 200 x 0.05 lb | 41 lb | 7217 | 2,190.00 |
| **15" x 15"** | | | | |
| 22050/15-C20 | 50 x 0.01 lb | 71 lb | 7218 | 2,265.00 |
| 22100/15-C20 | 100 x 0.02 lb | 71 lb | 7219 | 2,265.00 |
| 22200/15-C20 | 200 x 0.05 lb | 71 lb | 7220 | 2,265.00 |
| **18" x 18"** | | | | |
| 22100/18S-C20 | 100 x 0.02 lb | 87 lb | 7222 | 2,540.00 |
| 22250/18S-C20 | 250 x 0.05 lb | 87 lb | 7223 | 2,540.00 |
| 22500/18S-C20 | 500 x 0.1 lb | 87 lb | 7224 | 2,540.00 |
| **18" x 24"** | | | | |
| 22250/1824-C20 | 250 x 0.05 lb | 105 lb | 7225 | 2,760.00 |
| 22500/1824-C20 | 500 x 0.1 lb | 105 lb | 7226 | 2,760.00 |
| **24" x 24"** | | | | |
| 22250/2424-C20 | 250 x 0.05 lb | 116 lb | 7227 | 3,120.00 |
| 22500/2424-C20 | 500 x 0.1 lb | 116 lb | 7228 | 3,120.00 |
| 221000/2424-C20 | 1,000 x 0.2 lb | 116 lb | 7229 | 3,120.00 |
| **Service Parts** | | | | |
| ENC 0148 platter | 10" x 10" | 3 lb | 3671 | 135.00 |

**APS 2200P w/ column**

doran

## 7000 Stainless Steel Bench/Floor Scale

Service parts only for Doran 7000.

| Part Number | Weight | SKU | List |
|---|---|---|---|
| **Service Parts** | | | |
| SWI0007 Rubber boot for switch | 1 lb | 1311 | $ 8.00 |
| SUB0004-3 foot 10-24 thread pk(6) | 1 lb | 1915 | 30.00 |
| SUB00040-4 foot M6 thread pk(6) | 1 lb | 4994 | 35.00 |

**7050 Stainless Steel Bench/Floor**

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

# Bench

**8025XL/12**
**Bench Scale**
**w/ optional 14" column**

## doran

### 8000XL Bench/Floor Scale

Service parts only for 8000XL
NTEP Legal for Trade (indicator) CC #99-129 Class III 10,000 div

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| **Service Parts** | | | | | |
| SUB0853 Battery with cables | | | 2 lb | 6657 | $ 121.00 |
| PCA415 Main Board 4300M/8000XL | | | 1 lb | 6219 | 660.00 |
| SUB0210-1 large knob kit (1) knob (1)washer | | | 0.07 lb | 4049 | 14.30 |
| SUB0210-2 small knob kit (2) knobs (2)washers | | | 0.07 lb | 4050 | 23.90 |
| SUB0397 front enclosure 8000XL | | | 1 lb | 4061 | 576.00 |

## doran

### MVP Bench/Floor Scale

Simple, intuitive, designed to withstand the use and abuse of extreme industrial applications. Seven overload stops provide outstanding load cell protection. Two part polyurethane paint provides excellent wear and abrasion protection. 6 digit, 0.56" red LED. Keys are: ZERO, GROSS/NET, TARE, UNITS, PRINT, ON/OFF. Weighing units are: g, lb, kg, oz, lb:oz. Bi-directional RS232. 115 VAC 60Hz, adapter, UL (230 VAC optional) Indicator 7.5"W x 1.75"D x 3.5"H
NTEP Legal for Trade 05-061 Class III 5,000 div (Indicator)
NTEP Legal for Trade 05-062 Class III 5,000 div (Base)
Canada pending

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| MVP3100 | 100 x 0.02 lb | 18" x 18" | 67 lb | 6084 | $ 1,251.00 |
| MVP3250 | 250 x 0.05 lb | 18" x 18" | 67 lb | 6085 | 1,251.00 |
| MVP5250 | 250 x 0.05 lb | 24" x 24" | 85 lb | 6089 | 1,476.00 |
| MVP5500 | 500 x 0.1 lb | 24" x 24" | 85 lb | 6091 | 1,476.00 |
| MVP51000 | 1,000 x 0.2 lb | 24" x 24" | 85 lb | 6092 | 1,476.00 |
| **36" Column** | | | | | |
| MVP3100-36 | 100 x 0.02 lb | 18" x 18" | 97 lb | 6249 | 1,451.00 |
| MVP3250-36 | 250 x 0.05 lb | 18" x 18" | 97 lb | 6250 | 1,451.00 |
| MVP5250-36 | 250 x 0.05 lb | 24" x 24" | 115 lb | 6254 | 1,676.00 |
| MVP5500-36 | 500 x 0.1 lb | 24" x 24" | 115 lb | 6255 | 1,676.00 |
| MVP51000-36 * | 1,000 x 0.2 lb | 24" x 24" | 115 lb | 6256 | 1,676.00 |
| * No lb:oz weight display | | | | | |
| **Options** | | | | | |
| DSOPT-001 RS232 Serial Data Output w/ 4 wire shielded cable, 10 ft female 9 pin D connector | | | 1 lb | 6093 | 75.00 |
| DSOPT-002 RS232 Serial Data Output w/ 4 wire shielded cable, 10 ft male 25 pin D connector | | | 1 lb | 6094 | 35.00 |
| DSOPT-003 230 VAC operation | | | 2 lb | 6095 | 25.00 |
| MVPOPT-001 Mobility kit w/ (4) 3" dia locking swivel casters | | | 20 lb | 6096 | 90.00 |
| MVPOPT-002 24" x 24" Stainless steel platter | | | 30 lb | 6097 | 300.00 |
| MVPOPT-003 18" x 18" Stainless steel platter | | | 25 lb | 6098 | 250.00 |
| DMSOPT04 24" x 24" Roller conveyor w/ galvanized rollers 1-7/8" dia | | | 45 lb | 6099 | 425.00 |

**MVP Bench Scale**
**W/36" column**

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.


www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp®
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

Yamato

## DP-6900 Bench Scale

Bench and receiving scales. Applications for checkweighing, gross/net weighing and basic weighing. Rechargeable battery 240 hours of continuous operation with charging time of 12 hours and AC operation. Programable auto-off. Weighing units are: lb, kg, oz, lb:oz. 115 VAC 60Hz, adapter. Platform 13.8" x 19.7" x 30.8"H.
NTEP Legal for Trade 17-019

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| DP-6900-60 | 60 x 0.02 lb | 39 lb | 1480 | $ 924.00 |
| DP-6900-150 | 150 x 0.05 lb | 39 lb | 1481 | 924.00 |
| DP-6900-3000 | 300 x 0.1 lb | 39 lb | 1482 | 924.00 |
| **Service Parts** | | | | |
| LHV-5000-690640 AC adapter for 6900 | | 0.27 lb | 1493 | 52.00 |

**DP-6900-150**

# Bench

**BW**
**Bench/Floor**

CAS CORPORATION

## BW Battery Powered Bench/Floor Scale

Rechargeable or dry battery operation. Environmentally sealed (washdown IP65). Full 5 digit weight display (LCD) with backlight. Counting function. Standard RS232 output. Low battery indicator. Fast battery recharge. Battery life without use of backlight: Rechargeable batteries 100 hrs., Manganese 200 hrs., Alkaline 300 hrs Auto zero tracking. Comparator function (High, OK, Low). Automatic print function. Tactile keypad. Keys for ON, OFF, LIGHT, ZERO, TARE, NET/GROSS, kg/lb. Full tilt swivel indicator head . 120 VAC adapter included.
BW-60 & BW150 Platform 15-1/2" x 20-1/2" Height 31"
NTEP Legal for Trade 98-085 Class III 3,000 div

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| BW-60DB scale | 150 lb x 0.05 lb | 39 lb | 3890 | $ 931.00 |
| BW-150DB scale | 300 lb x 0.1 lb | 39 lb | 3891 | 931.00 |
| **Options** | | | | |
| HB1A wall mount bracket for BW indicator | | 1 lb | 3892 | 45.00 |
| In use cover for BW indicator | | 1 lb | 3893 | 30.00 |
| **Service Parts** | | | | |
| 7504-A00-0080 AC adapter 120 VAC | | 1 lb | 3894 | 42.80 |

**DL-150**
**Bench/Floor**

CAS CORPORATION

## DL Bench/Floor Scale

Battery operated scale that is easy to operate. Keys for ON/OFF, ZERO, TARE, SET, MODE. Kg/Lb switchable. Large liquid crystal display(LCD). Auto power off after inactive period. Auto span calibration and auto zero tracking. Self contained, battery operated (6) 1.5 VDC batteries (Not included). Includes AC adapter 120 VAC, 50/60 Hz, 1 watt.
Overall size 16.5" x 25" x 31"H. 2 year warranty.
NTEP Legal for Trade 08-016 III 3,000 div,

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| DL-150 scale | 150 x 0.05 lb | 15.8" x 20.6" | 33 lb | 2155 | $ 531.00 |
| DL-300 scale | 300 x 0.1 lb | 15.8" x 20.6" | 47 lb | 2156 | 531.00 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.


www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp®
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

CAS CORPORATION

## PB Portable Bench Scale

Portable. Easy to carry. Rechargeable or dry cell battery. 6 digit, detachable LCD display with backlight. Keys for: ZERO, TARE, UNIT/PRINT, POWER. Auto power off, Weighing Hold, Backlight ON/OFF, Bright Control, Print Out functions. Auto zero tracking. Symbols for: Stable, Zero, Tare, kg, lb, Low Battery. RS232C interface. Wall mounting bracket. Rechargeable battery (included), 60 hours or (4) C cell batteries (not included). Overall dimensions 14"W x 24.2"D x 3.3"H.
NTEP Legal for Trade 11-056

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| PB-150 | 150 lb x 0.02 lb | 14" x 17.5" | 19 lb | 1262 | $ 531.00 |
| PB-300 | 300 lb x 0.05 lb | 14" x 17.5" | 19 lb | 1263 | 531.00 |
| PB-500 | 300 lb x 0.1 lb<br>500 lb x 0.2 lb | 14" x 17.5" | 19 lb | 1264 | 531.00 |
| **Service Parts** | | | | | |
| PPB1 main board for PB | | | 1 lb | 1266 | 240.00 |

**PB**
**Portable Bench Scale**
**w/ detachable LCD display**

VISIONTECH SHOP

## MVS1 Bench/Floor/Shipping/Postal Scale

Heavy duty digital shipping and postal scale. LCD display with backlight. Indicator has rugged ABS housing and a 3m coil cord for wall mounting. Keys for ZERO/ON/OFF, TARE, UNIT, PRINT/HOLD. Units: lb, lb:oz, kg. 9 volt battery operated with power adapter included. Standard USB interface can be connected to computer for receiving weight data. Low profile design with checkered steel nonslip platform. Has shipping screw which protects the load cell against damage during shipping. Base has adjustable non slip feet for easy leveling during installation. Overall 12.0" W x 12.0" D x 2.4" H.

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| MVS1 | 165 lb x 0.1 lb<br>75 kg x 0.05 kg | 12" x 12" | 9.7 lb | 6743 | $ 218.75 |

**MVS1**
**Shipping**
**Postal**

VISIONTECH SHOP

## GL Bench Scale

Portable, Read the weight either forward or reverse, ergonomic with convenient carry handle, back light and wide LCD display. High and low limit and alarm settings. Keys for: Zero, Tare, Print, Unit, On/Off. Display for: Zero, Net, Print,LB,Kg,Battery(3 stage). 100-240VAC adapter(4) C batteries(not incluted). Overall 13.9"Wx 23.1" Dx 3.4"H. 2 year warranty.
NTEP Legal for Trade

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| GL-6060L | 30/60x0.01/0.02lb | 13.9" x 16.8" | 16 lb | 1579 | $ 440.00 |
| GL-6150L | 30/150x0.02/0.05lb | 13.9" x 16.8" | 16 lb | 1580 | 440.00 |
| GL-6300L | 150/300x0.05/0.1lb | 13.9" x 16.8" | 16 lb | 1581 | 440.00 |
| GL-6500L | 250/500x0.1/0.2lb | 13.9" x 16.8" | 16 lb | 1582 | 462.00 |

**GL-6060L**

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

# Bench

TBWS bench scale

VISIONTECH SHOP

## TBW Bench/Floor Scale

Large easy to read 2 inch (52mm) large LCD display with backlight. Stainless steel pan. ABS plastic indicator. Battery provides up to 70 hours of continuous use (without backlight). Standard RS232 interface for use with a computer or printer. Internal battery and AC adapter included. Weighing units: lb, kg, oz. Application modes: Weighing, Counting, Check Weighing, Accumulation. Keys for: UNIT, PCS, G/N, ACC/TTL/PRINT, TARE, ZERO, ON/OFF. Display for: Zero, Net, Print, lb, kg, Battery. 100-240 VAC adapter and rechargeable battery are included. Overall 15.7"W x 25.1"D x 32.6"H. 2 year warranty. IP65

NTEP Legal for Trade

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| TBW-100 | 100 lb x 0.02 lb | 15.7" x 19.6" | 46 lb | 7323 | $ 885.00 |
| TBW-200 | 200 lb x 0.05 lb | 15.7" x 19.6" | 46 lb | 7324 | 885.00 |
| TBW-500 | 500 lb x 0.1 lb | 15.7" x 19.6" | 46 lb | 7325 | 953.75 |
| **Service Parts** | | | | | |
| GH645 Rechargeable battery | | | 4 lb | 6114 | 31.90 |

TBWS Washdown Bench scale

VISIONTECH SHOP

## TBWS Bench/Floor Scale Washdown

Washdown IP65 protection against dust and liquids. Stainless steel construction. Easy to read 2 inch (52mm) large LCD display with backlight. Battery provides up to 70 hours of continuous use (without backlight). Standard RS232 interface for use with a computer or printer. Internal battery and AC adapter included. Weighing units: lb, kg, oz. Application modes: Weighing, Counting, Check Weighing, Accumulation. Keys for: UNIT, PCS, G/N, ACC/TTL/PRINT, TARE, ZERO, ON/OFF. Display for: Zero, Net, Print, lb, kg, Battery. 100-240 VAC adapter and rechargeable battery are included. Overall 15.7"W x 25.1"D x 32.6"H. 2 year warranty. IP65

NTEP Legal for Trade

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| TBWS-100 | 100 lb x 0.02 lb | 15.7" x 19.6" | 46 lb | 7239 | $ 1,071.25 |
| TBWS-200 | 200 lb x 0.05 lb | 15.7" x 19.6" | 46 lb | 7240 | 1,071.25 |
| TBWS-500 | 500 lb x 0.1 lb | 15.7" x 19.6" | 46 lb | 7241 | 1,121.25 |
| **Service Parts** | | | | | |
| GH645 Rechargeable battery | | | 4 lb | 6114 | 35.09 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

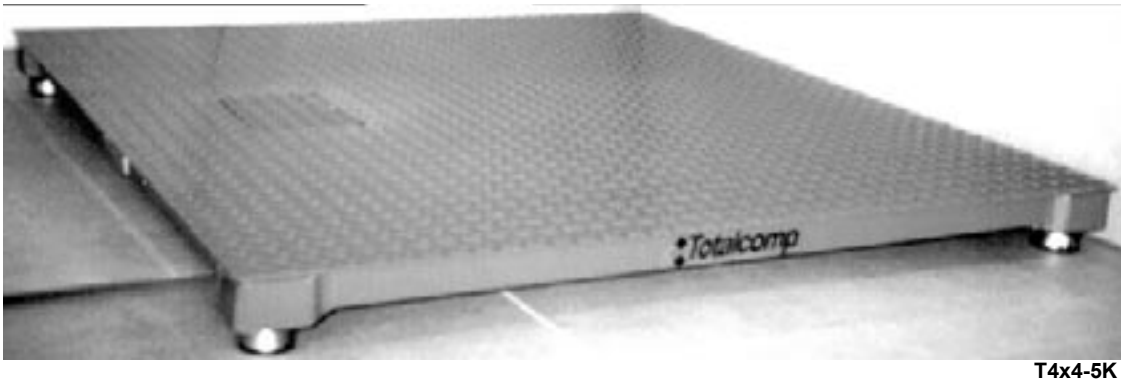


**T4x4-5K**
**Floor Scale**

Totalcomp

## Package Heavy Duty Floor Scale Base and Indicator

Package includes:
(1)Base rugged with sturdy deck and channel construction, checkered safety tread deck, painted steel construction.
(1)Indicator TRWS LCD
(1)Calibration of base and indicator
NTEP Legal for Trade 16-016 III, 5,000 div Base
NTEP Legal for Trade 13-091 III, 5,000 div Indicator

| Part Number | Size | Capacity | Weight | SKU | List |
|---|---|---|---|---|---|
| T4x4-5K package | 4'x4'x3.75" | 5,000 x 1 lb | 260 lb | 4737 | $ 1,276.30 |
| T4x4-10K package | 4'x4'x3.75" | 10,000 x 2 lb | 260 lb | 4738 | 1,353.30 |
| T5x5-5K package | 5'x5'x3.75" | 5,000 x 1 lb | 345 lb | 4768 | 1,401.30 |
| T5x5-10K package | 5'x5'x3.75" | 10,000 x 2 lb | 345 lb | 4769 | 1,401.30 |
| **Options** | | | | | |
| 4' x 3' Ramp steel safety tread | | | 150 lb | 5712 | 485.00 |
| 4' x 4' Ramp steel safety tread | | | 102 lb | 5704 | 895.00 |
| 5' x 4' Ramp steel safety tread | | | 218 lb | 5726 | 995.00 |
| **Service Parts** | | | | | |
| TRWS Indicator | | | 7 lb | 7667 | 281.93 |
| IDS950-4 Summing Junction Box | | | 1 lb | 3942 | 100.00 |
| TSB-2.5K load cell for 5K base | | 2,500 lb | 3 lb | 2253 | 168.00 |
| TSB-5K-SE load cell for 10K base | | 5,000 lb | 3 lb | 2255 | 168.00 |
| DBF 1/2-20 beam foot | | | 1 lb | 2522 | 28.00 |

Prices for Floor scale bases and packages are FOB Factory

**TRWS Indicator**
**Included with package**

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

# Floor

**PFS7500XLP**
**Portable Floor Scale**
**w/ 7000XLM indicator**

doran

## PFS7000 Portable Floor Scale Stainless Steel

24” x 24” platform. 7000XLM indicator for fast, accurate digital weights. Pushbutton Zero for fast tare. Indicator height is 40” above the platform and 51” above the floor. 2 handles for easy moving. USDA approved. Washdown safe 304 **stainless steel.** LB, KG, OZ, LB & OZ weight display. 1 year warranty. 115 VAC, 60 Hz, 8 watts.
NTEP Legal for Trade 91-106, 89-113, III, 3,000 div
Canadian approval AM-5188, S.WA-4398, 3,000 div

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| 7250XL-PFS | 250 x 0.1 lb | 24” x 24” | 200 lb | 6496 | $ 4,670.00 |
| 7500XL-PFS * | 500 x 0.2 lb | 24” x 24” | 200 lb | 6497 | 4,670.00 |
| 71000XL-PFS | 1,000 x 0.5 lb | 24” x 24” | 200 lb | 6498 | 4,670.00 |

* This model does not have lb & oz weight display capability.


www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

Totalcomp



## TDS Portable Drum Scale

TDS platform is made out of industrial weight heavy duty 1/4" checkered thread steel plate baked powder painted. Two built in folding ramps are low enough to get a hand truck on with ease. Lifting handle and built in wheels for easy moving. Platform uses standard (4) 3 mv/v, 350 ohm load cells and stainless steel signal trim summing junction box. For easy leveling, top bubble level is included. Live rail makes the weighing surface even larger than 36". Select an indicator from our line of indicators and we will calibrate for you. Platform 36" x 36", ramps are 10", overall w/ ramps 44" x 56" x 3"H.

TRWS is Stainless steel, digital weight indicator with backlit LCD display. 6 mechanical switch keys. Applications for: Check Weighing, Accumulation, Over/Under, Animal Weighing. Units for: lb, kg, g, oz, tj, hj. Internal counts: 600,000. Rechargeable battery provide up to 35 hours of continuous use. IP65 housing. RS232 serial port. AC adapter included.
Max div 30,000.
NTEP Legal for Trade 13-091 III 6,000 div

| Part Number | Min Height | Capacity | Cell(s) | Weight | SKU | List |
|---|---|---|---|---|---|---|
| TDS-2.5K | 2.00" | 2,500 x 1 lb | 1,000 lb | 150 lb | 5248 | $ 1,364.00 |
| TDS-5K | 2.00" | 5,000 x 1 lb | 2,500 lb | 158 lb | 5249 | 1,508.10 |
| TRWS Indicator | | | | 5 lb | 7667 | 281.93 |
| **Service Parts** | | | | | | |
| Load cell connector, 5 pin | | | | 1 lb | 6359 | 42.46 |
| Main board for TRWS | | | | 1 lb | 6361 | 187.54 |
| AC adapter for TRWS/TWP/TLI 100-240 VAC to 12 VDC | | | | 1 lb | 6362 | 34.84 |
| Battery for TRWS | | | | 1 lb | 6363 | 62.66 |
| TRWS front overlay | | | | 1 lb | 7327 | 29.28 |
| **Option** | | | | | | |
| Tripod for TRWS indicator | | | | 3 lb | 6287 | 143.48 |

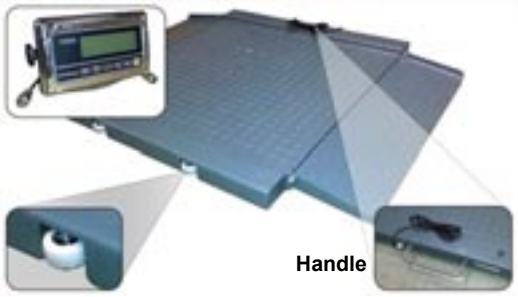


Built in wheels

TDS

Tripod

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

**CW250**
**Floor Scale**

## CW250 Portable Floor Scale

Portable and compact scale designed for weighing 55 gallon drums, chlorine cylinders, propane tanks, Freon tanks and other heavy containers. This rugged all aluminum self contained scale has an accuracy of 0.1%. Includes (4)AA 1.2 volt nickel cadmium batteries, charger cable and adapter for charging from 12 VDC or 120 VAC. Batteries will give 200 hours use with full charge. Charging time is 8 hours max. Liquid Crystal weight display has Back Light for use at night. Optional data output is RS232 or 20ma current loop.
Canadian AM-5532
NTEP Legal for Trade 95-024 III 2,000 div

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| **15" x 15" x 4" Platform** | | | | |
| CW250-150-1S | 150 x 0.05 lb | 38 lb | 3036 | $ 1,845.00 |
| CW250-300-1S | 300 x 0.1 lb | 38 lb | 2237 | 1,845.00 |
| CW250-500-2S | 500 x 0.2 lb | 38 lb | 2238 | 1,845.00 |
| CW250-1000-5S | 1,000 x 0.5 lb | 42 lb | 2239 | 1,845.00 |
| CW250-1500-5S | 1,500 x 0.5 lb | 42 lb | 2457 | 1,845.00 |
| CW250-2000-1S | 2,000 x 1 lb | 42 lb | 2240 | 1,845.00 |
| **24" x 24" x 4" Platform** | | | | |
| CW250-1000-5 | 1,000 x 0.5 lb | 95 lb | 2243 | 1,695.00 |
| CW250-1500-5 | 1,500 x 0.5 lb | 95 lb | 2570 | 1,695.00 |
| **Options** | | | | |
| 100480 Charger & cable (1) scale | | 2 lb | 1508 | 160.00 |
| 100449 Cast aluminum ramp 15"x15" | | 21 lb | 2749 | 395.00 |
| 100183 CW-TW Transport Wheels(2 per platform) | | 12 lb | 2311 | 175.00 |
| RFX Handheld wireless Indicator | | 4 lb | 6177 | 995.00 |
| **Service Parts** | | | | |
| 330010 battery pack w/(6) AA NiCad batteries, old style | | 1 lb | 1960 | 49.00 |
| 330158 battery pack w/ (4)AA NiCad batteries | | 1 lb | 2316 | 39.00 |
| 601504 foot for CW250 | | 1 lb | 2317 | 4.25 |
| 603091 Load Cell CW250-150/300 | | 6 lb | 2318 | 426.00 |
| 603162 Load Cell CW250-500 | | 6 lb | 2319 | 543.00 |
| 603048 Load Cell CW250-1000/2000 | | 6 lb | 2320 | 543.00 |

**RFX**
**Handheld Wireless Indicator**

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

DETECTO
A Division of Cardinal Scale Manufacturing Co.

## RW Portable Floor Scale

Portable low profile floor scale. Platform is made of heavy steel checkered plate with baked powder paint. Two built in ramps. Lifting handles and built in wheels for easy moving. Model 204 Indicator for desk or wall mounting. Standard RS232 output. Overall imensions 32.5"L x 40.5"W x 3.5"H. (6) "C" cells or NiCad batteries or 120 VAC adapter (included) 50/60 Hz.

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| RW-500 | 500 x 0.2 lb | 32.5" x 30" | 105 lb | 6004 | $ 2,250.00 |
| RW-1000 | 1,000 x 0.5 lb | 32.5" x 30" | 105 lb | 6006 | 2,490.00 |
| **Service Parts** | | | | | |
| 0067-B044-0A cable, load cell connection | | | 1 lb | 5993 | 81.00 |

**RW-1000**
**204 Indicator**

Built-in wheels

Integral handles

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

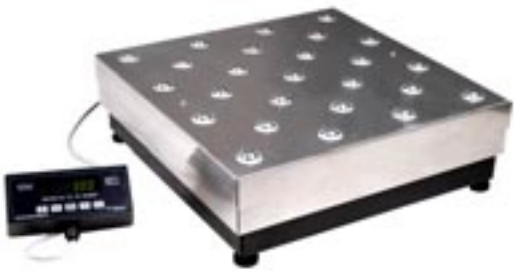

**SRP-300**
**w/ Optional Transfer ball top**

TRANSCELL TECHNOLOGY, INC.

## SRP Bench/Floor Scale

Shipping, Receiving, Manifest Systems, Portion Control. RS232 full duplex serial port. Front panel keys: lb/kg, Zero, Net/Gross, Tare, Print. 120 VAC, 50/60 Hz adapter 6 watt.
Overall size (SRP)18" x 18" x 4.8"H.
NTEP Legal for Trade 95-034

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| **Bright LED display** | | | | |
| SRP-300 | 300 x 0.1 lb | 49 lb | 2712 | $ 1,125.00 |
| **Options** | | | | |
| 12" Swivel post for SPL/SRP | | 2 lb | 2713 | 52.50 |
| 18" Swivel post for SPL/SRP | | 2 lb | 2714 | 62.00 |
| TBT1818 Transfer ball top for SRP | | 14 lb | 2715 | 410.00 |

**PC-150**
**Bench Scale**

TRANSCELL TECHNOLOGY, INC.

## PC Bench Scale

Shipping, Receiving, Manifest Systems, Portion Control, Filling, Packing, Parcel, Letter. Bright LED display. RS232 full duplex serial port. Front panel keys: lb/kg, Zero, Net/Gross, Tare, Print. Compatible with FedEx Ship Manager Software.
120 VAC adapter 9 V, 2 A
Overall size 13" x 13" x 4.4"H.
NTEP Legal for Trade 96-000

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| PC-150 scale | 0-5 x 0.01 lb<br>5-70 x 0.02 lb<br>70-150 x 0.05 lb | 31 lb | 1662 | $ 750.00 |
| **Options** | | | | |
| TBT1313 Transfer ball top | | 15 lb | 1663 | 350.00 |
| Null modem cable | | 1 lb | 1547 | 25.00 |
| **Service Parts** | | | | |
| AD008002 AC adapter for PC-150 9V 2A | | 1 lb | 1630 | 50.00 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

CAS CORPORATION

## PD-2Z POS Check Stand Scale

Interface with register or computer. Stainless steel tray. Use as a bench scale. LED display, USB port. Easy to read tilt display. Auto zero tracking. Dual range. AC 120v, 60Hz. Platter size 14.9" x 11". Overall size 15"W x 11"D x 3.1"H
NTEP Legal for Trade 92-174

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| PD-2Z(15lb) | 6 x 0.002 lb<br>15 x 0.005 lb | 15 lb | 6979 | $ 529.00 |
| PD-2Z(30lb) | 15 x 0.005 lb<br>30 x 0.01 lb | 15 lb | 6980 | 529.00 |
| PD-2Z(60lb) | 30 x 0.01 lb<br>60 x 0.02 lb | 15 lb | 6981 | 529.00 |
| PD-2Z(150lb) | 60 x 0.02 lb<br>150 x 0.05 lb | 15 lb | 6982 | 559.00 |
| **Options** | | | | |
| Remote display | | 5 lb | 1502 | 195.00 |
| 7880-PDO-4128 cable 9 pin to RS232 25 pin | | 1 lb | 949 | 33.00 |
| JPD5 IBM/PC cable 9 pin to RS232 25 pin | | 1 lb | 979 | 30.00 |

**PD-2Z**

PENNSYLVANIA

## 7300 Bench Scale

Heavy duty cast construction. UPS Online 6.0 compatible. Stainless steel platform. Bright green LED display. Weight displayed in two units of measure. Front panel keys: ON/OFF, ZERO, UNITS, PRINT. RS232 bidirectional interface. Optional remote display. Optional battery operation. 120 VAC, 50/60 Hz, 8 watts. 14.25"W x 12.25"D x 4"H
NTEP Legal for Trade 91-149, III, 10,000 div 10 lb and higher
Canadian AM-4869

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|

**7300**
**Bench scale**
**UPS**



13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

**PC400**
**Portion Control Scale**
**Shockproof "Quad Spring" platform with rechargeable battery**

## doran

### PC400 Portion Control Scale

304 **stainless steel** construction for wipedown cleaning not washdown. It can go anywhere with the internal rechargeable battery(included). It will also work on 120VAC power. "Quad Spring" shockproof platform. The electronics are environmentally sealed. Units are lb, kg, g, oz, lb/oz. Modular, replaceable components. Full digital calibration. Keys for ZERO, ON/OFF, UNITS. 4 digit, 0.66" high LCD. RS232 standard. 120 VAC, plug mount transformer with 6 ft. cord (UL/CSA listed) and rechargeable battery, included. Overall dimensions 6.5" W x 8.75" L x 2" H.
NSF Certification National Sanitary Foundation for sanitary food service equipment.
NTEP Legal for Trade 04-039

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| PC400-02LFT | 2.2 x 0.001 lb | 6.5" x 6.5" | 6 lb | 6289 | $ 375.00 |
| PC400-05 | 5 x 0.002 lb | 6.5" x 6.5" | 6 lb | 6290 | 375.00 |
| PC400-10 | 10 x 0.005 lb | 6.5" x 6.5" | 6 lb | 6291 | 375.00 |
| PC400-20 | 20 x .01 lb | 6.5" x 6.5" | 6 lb | 2850 | 375.00 |
| **Options** | | | | | |
| PCOPT06 230 VAC operation | | | 1 lb | 6292 | 60.00 |
| WCB-149 RS232 cable w/9 pin connector | | | 1 lb | 6293 | 21.40 |
| **Service Parts** | | | | | |
| SWI0211 Touch panel | | | 1 lb | 8353 | 89.00 |
| BAT0013 Replacement battery pack for PC400 | | | 2 lb | 6294 | 50.00 |
| PCOPT04 carry case PC400 | | | 3 lb | 6298 | 100.00 |
| ENC0804 Platter 6.5" x 6.5" for PC400 | | | 1 lb | 6296 | 64.20 |
| SUB0531 Foot assembly set of (4) for PC400 | | | 1 lb | 6297 | 28.50 |
| XFR0035 AC adapter 115VAC negative center 6' cord for PC400 | | | 1 lb | 6295 | 63.60 |
| XFR0039 AC adapter 115VAC positive center 6' cord for PC400* | | | 1 lb | 6221 | 60.00 |

*Note: PC400 with s/n NPC403000 and higher use the adapter with positive center, stock 6221.

**FD**
**Portion Control**

## OHAUS®

### FD Food Portion Control Scale

All stainless steel, dishwasher safe removable pan. Rugged, multi-use portioning scale. Bright backlit LCD display. Weighing units: lb, decimal and fractional oz, kg, g, lb:oz. Keys are: ON/OFF/ZERO, G/N/T/UNITS, TARGET/MENU, TARE. Indicators for: center of zero, net, tare. Checkweighing mode with 3 LED indicator and audible alarm. Text displays of weigh units. Audible buzzer alerts user when limits are reached. Manual or auto tare. 120VAC adapter included. Internal sealed lead-acid battery with 120 hours charge life. 1 year warranty. 8.8"W X 11.8"D X 2.8"H. Platform size 8.2" x 8.2".
NSF listed/certified
USDA accepted
NTEP Legal for Trade 05-072

| Part Number | Capacity | NTEP | Weight | SKU | List |
|---|---|---|---|---|---|
| **NTEP Legal for Trade** | | | | | |
| FD6 | 15 x 0.002 lb | 15 x 0.005 lb | 11 lb | 5296 | $ 848.00 |
| **High accuracy** | | | | | |
| FD6H | 15 x 0.001 lb | | 11 lb | 6418 | 951.00 |
| **Service Parts** | | | | | |
| 71158350 main board for FD | | | 1 lb | 6421 | 651.00 |
| 71169710 keypad function label for FD | | | 0.04 lb | 5297 | 94.00 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

doran

## PC500 Portion Control Scale WASHDOWN

Stainless steel. IP66 washdown safe. The PC500 features a soft silicone seal that protects against washdown spray and allows a high level of accuracy. Tackles harsh environments of washdown, food service and industrial applications. 1000% overload "Quad Spring" design. 6 digit, 0.66" high LCD display. Keys for: ON/OFF, Zero, Units. Units are lb, kg, g, oz, or lb:oz. Five way weight display show the same weight in 5 different units. Indicators for motion, low battery, weighing units, and center of zero. 1,000 hour battery life. Battery operated, optional 115V AC adapter with 8' cable. Bi-directional RS-232. Overall dimensions 12.75"L x 9.75"W x 5.26"H. Platter size 8.5" x 8.5"
NSF Certification National Sanitary Foundation for sanitary food service equipment
NTEP Legal for Trade 09-032

| Part number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| PC500-25 | 25 x 0.01 lb | 13 lb | 7453 | $ 455.00 |
| **Options** | | | | |
| PC5OPT03 RS-232 Cable w/ 9 pin female | | 1 lb | 7461 | 50.00 |
| **Service Parts** | | | | |
| XFR0035 AC Adapter 115 V negative center | | 1 lb | 6295 | 63.60 |
| PCA0374 main board | | 0.23 lb | 2474 | 150.00 |
| SWI0212 keysheet | | 1 lb | 2499 | 48.00 |
| LCP22003 load cell PC500-03 | 3kg | 0.89 lb | 2496 | 159.00 |
| LCP22005 load cell PC500-05 | 5kg | 0.89 lb | 2516 | 159.00 |
| LCP22010 load cell PC500-10 | 8kg | 0.89 lb | 2517 | 159.00 |
| LCP22015 load cell PC500-15 | 15kg | 0.89 lb | 2518 | 159.00 |
| LCP22030 load cell PC500-30 | 30kg | 0.89 lb | 2519 | 159.00 |

**PC500-05**
**Portion control scale**

Yamato

## PPC-300-II Portion Control Scale

ABS with stainless steel platform cover. Large 1.2" LCD display. Checkweighing under/accept/over display. Weighing units: lb, oz, lb-oz, kg. Keys are: ON/OFF, UNITS, TARE, ZERO. Battery (4D) or 120VAC adapter included. Programable auto off. 1 year warranty. 9.5"W X 11.5 X 4.9"H. Platform size 9.8" x 8".

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| PPC-300-II-4.4 | 4.4 lb x 0.002 lb | 11 lb | 2558 | $ 527.00 |
| PPC-300-II-10 | 10 lb x 0.005 lb | 11 lb | 2559 | 527.00 |
| PPC-300-II-22 | 22 lb x 0.01 lb | 11 lb | 2560 | 527.00 |
| PPC-300-II-44 | 44 lb x 0.02 lb | 11 lb | 2561 | 527.00 |
| PPC-300-II-60 | 60 lb x 0.02 lb | 11 lb | 2562 | 527.00 |

**PPC-300-II**
**Portion Control**

Yamato

## PPC-300WP-II Washdown Portion Control Scale

Waterproof IP68. Stainless steel with stainless steel platform cover. Large 1.2" LCD display. Checkweighing under/accept/over display. Weighing units: lb, oz, lb-oz, kg. Keys are: ON/OFF, UNITS, TARE, ZERO. Battery (4D) or 120VAC adapter included. Programable auto off. 1 year warranty. 9.5"W X 11.5 X 4.9"H. Platform size 9.8" x 8".

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| PPC-300WP-II-4.4 | 4.4 lb x 0.002 lb | 11 lb | 1634 | $ 789.00 |
| PPC-300WP-II-10 | 10 lb x 0.005 lb | 11 lb | 1635 | 789.00 |
| PPC-300WP-II-22 | 22 lb x 0.01 lb | 11 lb | 1636 | 789.00 |
| PPC-300WP-II-44 | 44 lb x 0.02 lb | 11 lb | 1637 | 789.00 |

**PPC-300WP-II**
**Portion Control**

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

**AW-WLG**
**Portion Control**

Yamato

## AW-WLG Washdown Portion Control Scale

Waterproof IP67. ABS with stainless steel platform cover. Large LCD display. Weighing units: lb, oz, lb:oz. Keys are: ON/OFF, UNITS, TARE, HOLD. Battery(4AA) or 120VAC to 15V adapter included. 1 year warranty. 9.4"W X 11.8"D X 2.8"H. Platform size 9.4" x 7.3".

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| AW-WLG-15 | 0-15 x 0.005 lb<br>15-30 x 0.01 lb | 11 lb | 30 | $ 539.00 |
| AW-WLG-30 | 0-30 x 0.01 lb<br>30-60 x 0.02 lb | 11 lb | 31 | 539.00 |

**AW-WSM**
**Portion Control**

Yamato

## AW-WSM Washdown Portion Control Scale

Waterproof IP67. Stainless steel with stainless steel platform cover. Large 1" LCD display. Weighing units: lb, oz, g. Keys are: ON/OFF, UNITS, TARE/ZERO. 9V battery or 120VAC adapter included. Programable auto off. 1 year warranty. 6"W X 6.8"D X 1.9"H. Platform size 6" x 4.8".

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| AW-WSM-5KG | 12 lb x 0.002 lb<br>12 lb x 0.05 oz<br>192 oz x 0.05 oz<br>5,500 g x 1 g | 11 lb | 35 | $ 225.00 |

**PPC-200W-II**
**Portion Control**

Yamato

## PPC-200W-II Washdown Portion Control Scale

Washdown in battery mode. IP65. ABS with stainless steel platform cover. Large 1" LCD display. Checkweighing under/accept/over display. Weighing units: lb, oz, lb-oz, kg. Keys are: ON/OFF, UNITS, TARE, ZERO. Battery (6D) or 120VAC adapter included. Programable auto off. 1 year warranty. 9.1"W X 10.6"D X 6.9"H. Platform size 9.1" x 9.1".

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| PPC-200W-II-4 | 4 lb x 0.002 lb | 11 lb | 7045 | $ 693.00 |
| PPC-200W-II-10 | 10 lb x 0.005 lb | 11 lb | 7046 | 693.00 |
| PPC-200W-II-20 | 20 lb x 0.01 lb | 11 lb | 7047 | 693.00 |
| PPC-200W-II-40 | 40 lb x 0.02 lb | 11 lb | 7048 | 693.00 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287



13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

VISIONTECH SHOP

## TVS Portion Control Scale WASHDOWN

NTEP Legal for Trade portion control scale featuring **stainless steel** removable platter, IP65 washdown technology. Hand breathable knob design. Weighing units: lb, oz, kg, g, lb-oz. AC or battery. 70 hours of continuous use without backlight. Perfect for any food service in restaurants, bakery, deli, specialty stores, produce stand and farmer's markets. 'D' units have additional rear display for customer use. 9.2"x7.6" platter. 9.6"W x 11.8"D x 5"H. IP65
NTEP Legal for Trade

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| **Single display** | | | | |
| TVS-6 | 6 x 0.001 lb | 10 lb | 7199 | $ 345.00 |
| TVS-12 | 12 x 0.002 lb | 10 lb | 7200 | 345.00 |
| TVS-30 | 30 x 0.005 lb | 10 lb | 7201 | 345.00 |
| TVS-60 | 60 x 0.01 lb | 10 lb | 7202 | 345.00 |
| **Dual Display** | | | | |
| TVS-D-6 | 6 x 0.001 lb | 10 lb | 7203 | 381.25 |
| TVS-D-12 | 12 x 0.002 lb | 10 lb | 7204 | 381.25 |
| TVS-D-30 | 30 x 0.005 lb | 10 lb | 7205 | 381.25 |
| TVS-D-60 | 60 x 0.01 lb | 10 lb | 7206 | 381.25 |
| **Service Parts** | | | | |
| YVP1 AC adapter 120VAC | | 0.21 lb | 7347 | 30.00 |

**TVS**

**TVS**
**Dual display**

ACOM

## PW-200 ACOM

The ACOM PW-200 Portion Control Scale is a NTEP Legal for Trade portion control scale featuring **stainless steel** removable platter, compact in design and easy to use portion control scale for use in a variety of applications. Weighing units: lbs, oz, kg, g. AC or battery. The PW-200 is perfect for any food service in restaurants, bakery, deli, specialty stores, produce stand and farmer's markets.
NTEP Legal for Trade

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| PW-200(6) | 6 x 0.002 lb | 6 lb | 2538 | $ 199.00 |
| PW-200(15) | 15 x 0.005 lb | 6 lb | 2539 | 199.00 |
| PW-200(30) | 30 x 0.01 lb | 6 lb | 2540 | 199.00 |
| PW-200(60) | 60 x 0.02 lb | 6 lb | 2541 | 199.00 |
| **Service Parts** | | | | |
| YPW1 AC adapter 120VAC | | 0.21 lb | 2498 | 31.42 |

**PW-200**



Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

RICE LAKE WEIGHING SYSTEMS

**RLP-S**
**Portion Control Scale**

## RLP-S Portion Control Scale

Stainless steel. Compact and easy to use. Removable weigh pan for quick and easy cleaning. 6 digit, LED display. Keys for: RE-ZERO, TARE, ON/OFF. Indicators for: Ounces, Grams, Pounds, NET, Center of Zero, Battery Usage. HAACP compliant. AC adapter included. IP68 water and dust resistant. Overall dimensions 9.9"W x 11.4"D x 5.3"H. One year warranty.
NTEP Legal for Trade CC 10-068
Canada AM-5794

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| RLP-6S | 6 x 0.002 lb | 9.3" x 7.8" | 14 lb | 3458 | $ 400.00 |
| RLP-15S | 15 x 0.005 lb | 9.3" x 7.8" | 14 lb | 3460 | 400.00 |
| RLP-30S | 30 x 0.01 lb | 9.3" x 7.8" | 14 lb | 3462 | 400.00 |
| RLP-60S | 60 x 0.02 lb | 9.3" x 7.8" | 14 lb | 3467 | 400.00 |

Penn Scale Manufacturing Company Inc.
Scales and Scoops

**PS10**
**Portion Control Scale**

## PS Portion Control Scale

**PS-10**: Multi-Purpose. Easy to clean stainless steel platform. 0.75" LCD, 6 digits with backlight display. Keys for: UNIT, ZERO, TARE/C, ON/OFF. Weighing units are: lb;oz, lb, oz, g. Battery operation for portable weighing. AC adapter (included) or (6) AA Alkaline batteries (not included). Overall dimensions 6.7" x 6.7" x 2.5". Platter size 6.3" x 6.3". 1 year warranty.

**PS-20**: Multi-purpose. Easy to clean stainless steel platform. 1.2" LCD, 6 digits with backlight. Keys for: ZERO/SET, ON/OFF, TARE/MODE, UNIT. Weighing units are: kg, lb, lb;oz. Battery operation for portable weighing. AC adapter (included) or (6) AA Alkaline batteries (not included). Overall dimensions 12.7" x 10.5" x 3.4". Platter size 10" x 9". 1 year warranty.

| Part number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| PS10 | 10 x 0.001 lb | 4 lb | 7664 | $ 85.42 |
| PS20 | 20 x 0.01 lb | 7 lb | 7665 | 142.92 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287



13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

CAS CORPORATION

## AP-1 Price Computing Scale

Preset prices are retained in memory for 28 items. Each item has its own separate key for easy entry by pressing a single button. Easy to read bright green tower mounted display has three readouts for Total Price, Weight and Unit Price. Keyboard for entry of values. Keys for ON/OFF, ZERO, TARE, MEM, SAVE, MODE, ADD, *, 1/2, 1/4, TTP CALL, TTP CLP. Auto span calibration with auto zero tracking. Number of transactions display. Optional large tray 17.3" x 10" x 2"H for produce. **Stainless steel** platform size 8.8" x 13.5". Overall size 13.8" x 16.5" x 20"H. 120 VAC, 10 watt.
NTEP Legal for Trade 90-007.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| AP-1-15 Scale | 15 lb x 0.005 lb | 15 lb | 2930 | $ 481.00 |
| AP-1-60 Scale | 30 lb x 0.01 lb | 15 lb | 2625 | 481.00 |
| Dual range | 60 lb x 0.02 lb | | | |
| **KG version** | | | | |
| AP1-15KG Scale | 15kg x 5g | 14 lb | 1175 | 385.00 |
| **Options** | | | | |
| Produce platter for AP-1 | | 6 lb | 5728 | 90.00 |
| Wet cover for AP-1 for keyboard | | 3 lb | 1142 | 16.00 |
| **Service Parts** | | | | |
| KAPS keypad for AP-I | | 1 lb | 1143 | 56.00 |

**AP1**
**Computing Scale**

CAS CORPORATION

## CL7200 Price Computing Scale

Touch screen 10.2" display
7" display for customers
Label printing scale
High speed thermal printer
Quick change label cartridge
45 standard label formats
4,000 PLU Price look ups
USB program backup and restore
Multiple barcode formats
Ethernet and wireless nework
English or Spanish characters
Editors for PLU, Label, keypad
**S**tainless steel platform 20.25" x 15.5".
Overall 16.14" x 19.68" x 14.57"H.
120 VAC, 10 watt.
NTEP Legal for Trade 17-096.
Measurement Canada AM-6087

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| CL7200-30(W) | 0-15 lb x 0.005 lb<br>15-30 lb x 0.01 lb | 33 lb | 2103 | $ 3,069.00 |
| CL7200-60(W) | 0-30 lb x 0.01 lb<br>30-60 lb x 0.02 lb | 33 lb | 2104 | 3,069.00 |

**CL7300**
**Computing Scale**

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

**LP-1000**
**Computing Scale**

**LP-1000 w/Pole**
**Computing Scale**

CAS CORPORATION

## LP-1000 Label Printing Price Computing Scale

Programmable scale and Auto printing and “Save” for pre-pack. 54 preset keys. 4,000 PLU(Price Look Up). Each PLU can have 5 lines with 80 characters each for 400 characters per PLU. Easy to read bright green display has three readouts for Total Price, Weight and Unit Price. Keyboard for entry of values. Keys for ZERO, TARE, PLU, SAVE, FOR, X, PRT, 1/2, 1/4. PLU data items: Commodity name, message, Item no., tare weight, unit price. Printing items: Commodity name, message, sell by data, unit price, weight, total price, store name & address. Smudge proof thermal label. Optional platter for fish. **Stainless steel** platform size 10” x 15”. 16” x 17” x 7.7”H. 120 VAC, 140 watt. NTEP Legal for Trade 92-169

| Part Number | Capacity | Memory | Weight | SKU | List |
|---|---|---|---|---|---|
| LP-1000-N | 30 lb x 0.01 lb | 400 Char/4000 PLU | 33 lb | 7140 | $ 1,479.00 |
| **Pole mount display** | | | | | |
| LP-1000-NP | 30 lb x 0.01 lb | 400 Char/4000 PLU | 34 lb | 7142 | 1,585.00 |
| **Options** | | | | | |
| JCD2 USB to RS232 converter dongle | | | 0.08 lb | 2978 | 60.00 |
| RS232 Interface cable | | | 1 lb | 2980 | 30.00 |
| **Service Parts** | | | | | |
| LST8000 Labels 58 x 30mm 1000/roll 12/case | | | 9 lb | 2981 | 86.25 |
| LST8010 Labels 58 x 40mm 700/roll 12/case | | | 9 lb | 2982 | 86.25 |
| LST8020 Labels 58 x 60mm 500/roll 12/case * | | | 9 lb | 2983 | 86.25 |
| * For Models B & C only. | | | | | |
| LST8030 Labels 58 x 50mm 500/roll 12/case | | | 9 lb | 2984 | 86.25 |
| LST8040 Labels 58 x 60mm 500/roll 12/case | | | 9 lb | 2985 | 86.25 |
| LP-1000 Printhead | | | 49 lb | 2711 | 288.00 |
| 2100-LPO-1000 key pad numeric | | | 1 lb | 2282 | 61.60 |
| KL18 keypad for LP-1000 | | | 1 lb | 2772 | 80.00 |
| 1006-A00-0483 label pickup pin | | | 1 lb | 2248 | 10.00 |
| EL1S gap sensor for LP-1000 | | | 0.06 lb | 2244 | 71.00 |
| EL1H orange round belt for LP-1000 | | | 1 lb | 2764 | 24.50 |

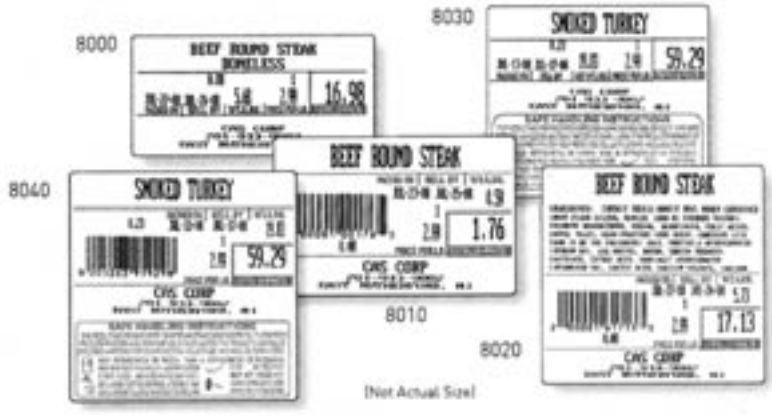


Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

CAS CORPORATION

## CL5500 Price Computing Scale

30 lb and 60 lb Capacities Available Dual Range 4,000 PLU's w/Direct Ingredient Messages - Max 2,100 Characters LCD Displays 96 Speed Keys (48 keys x 2) High Speed Thermal Printer Ethernet Included/Wireless Optional Same Menu Code System as the CL5000 Multiple Barcode Formats 45 Standard Label Formats Up to 20 Custom Labels Compatible with CL Works Pro Bench: 16(W) x 17(D) x 6.8(H)
NTEP Legal for Trade 90-007.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| CL5500B-60NE bench | 30 lb x 0.01 lb | 36 lb | 2089 | $ 2,380.00 |
| Dual range | 60 lb x 0.02 lb | | | |
| CL5500R-60NE w/pole | 30 lb x 0.01 lb | 36 lb | 2090 | 2,486.00 |
| Dual range | 60 lb x 0.02 lb | | | |
| CL5500B-30NE bench | 15 lb x 0.005 lb | 36 lb | 2091 | 2,380.00 |
| Dual range | 30 lb x 0.01 lb | | | |
| CL5500R-30NE w/pole | 15 lb x 0.005 lb | 36 lb | 2092 | 2,486.00 |
| Dual range | 30 lb x 0.01 lb | | | |

**CL5500**
**Computing Scale**

CAS CORPORATION

## CL5000 Label Printing Scale

Service parts only for CL5000.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| **Service Parts** | | | | |
| LST-8051 58mm wide x 100' continuous strip, 12 rolls/case | | 9 lb | 2809 | $ 91.00 |

**CL5000B**
**Label Printing Scale**

**S2000JR**
**Price Computing Scale**

**S2000JR**
**Price Computing Scale w/pole**

CAS CORPORATION

## S2000JR Price Computing Scale

Soft touch silicon rubber key pad. Backlight LCD display for Weight, Unit Price, Total Price. Auto power off. Keypad 0-9. Lb/kg/oz switchable. Function keys for: POWER, ZERO, TARE, LOW BATTERY, B/L. 3 Direct PLU& 199 indirect PLU's. Rechargeable battery (6V, 3.6Ah). 120V, 60Hz 7 watt. 12hr charging time. 120hr operating time. Platform size 12"W x 8.7"D. Standard type: 12.9"W x 13.6"D x 4.2"H. Pole type: 12.9"W x 15.2"D x 16.2"H.
NTEP Legal for Trade 06-013

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| S2000JR-15L | 15 x 0.005 lb | 12 lb | 7126 | $ 374.00 |
| S2000JR-30L | 30 x 0.01 lb | 12 lb | 7127 | 374.00 |
| S2000JR-60L | 60 x 0.02 lb | 12 lb | 7128 | 374.00 |
| S2000JR-15LP w/ pole | 15 x 0.005 lb | 12 lb | 7129 | 436.00 |
| S2000JR-30LP w/ pole | 30 x 0.01 lb | 12 lb | 7130 | 436.00 |
| S2000JR-60LP w/ pole | 60 x 0.02 lb | 12 lb | 7131 | 436.00 |
| **Options** | | | | |
| Fish platter for S2000JR | | 2 lb | 7138 | 90.00 |
| KS21 Full body protective cover for S2000JR | | 1 lb | 7237 | 20.00 |
| **Service Parts** | | | | |
| LST-8060 67 x 50mm Hi-Speed Blue Beacon 570/roll, 12 rolls/case | | 9 lb | 3421 | 66.25 |
| OT11 Foot | | 1 lb | 3762 | 13.20 |
| ZS25 Battery S2000JR | | 1 lb | 7508 | 48.00 |
| KS22 keypad S2000JR | | 1 lb | 3780 | 26.78 |
| YED2 adapter jack | | 0.05 lb | 3420 | 24.00 |
| YS21 AC adapter 120 VAC | | 1 lb | 7141 | 36.00 |
| **Laundry Scale** | | | | |
| S2000JR-60-LCD dual range & basket | 30 x 0.01 lb 60 x 0.02 lb | 22 lb | 6038 | 575.00 |
| **Options** | | | | |
| Laundry basket 26.75" x 22" x 11" | | 14 lb | 4901 | 170.00 |

**Laundry basket**
**23" x 26" top, 18" x 22" base**
**8"high front, 15"high rear**

**DLP-50**
**Label printer**

**DEP-50**
**Receipt printer**

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

CAS CORPORATION

## S-2000 Price Computing Scale

Low profile price computing scale. Conductive silicone rubber switch with soft touch. Easy to read bright green vacuum fluorescent display for Weight, Unit Price and Total price. Three displays are on the operators side of the scale as well as three displays on the customers side. Keypad 0-9 for entering prices. Function keys for ZERO, TARE, 1/2, 1/4, PREPACK, MW, MR, TARE SAVE, ADD, RECALL. Auto span adjustment and auto zero tracking. Indirect memory backup of up to 800 items. RS232 interface for computerized cash registers only. Not for use with printer or cash register alone. Optional large tray 17" x 11.25" for fish. **Stainless steel** platform size 14.6" x 11". Overall size 15.3" x 14.4" x 5.9"H. 120 VAC, 10 watt.
NTEP Legal for Trade 91-141

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| S-2000 scale | 30 lb x 0.01 lb | 19 lb | 2628 | $ 635.00 |
| Dual range | 60 lb x 0.02 lb | | | |
| **Options** | | | | |
| Fish platter for S-2000 | | 3 lb | 2630 | 90.00 |
| Wet cover for keyboard for S-2000 | | 1 lb | 1569 | 20.00 |
| **Service Parts** | | | | |
| PS0C Cas keyboard PBC S-2000 | | 1 lb | 2678 | 48.00 |
| YED1 CAS AC adapter 120VAC/12V/1.25A | | 1 lb | 2728 | 36.00 |

**S2000**
**Computing Scale**



CAS CORPORATION

## EB Price Computing Scale

Tilt keyboard and display. Customer side display. Lb/kg switchable. 60 to 300 lb capacity dual range. 24 direct PLU's/176 indirect PLU's. Programmable tare. Auto power off function. Rechargeable battery included. RS232C interface, connect with PC or printer. Large platform for bulk weighing. Optional label and receipt printing. For use with Laundry, Farmers Markets, Retail and Recycling.
NTEP Legal for Trade 09-095

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| EB-60 | 60 x 0.02 lb | 11" x 11" | 33 lb | 3477 | $ 781.00 |
| EB-150 | 150 x 0.05 lb | 15.75" x 20.3" | 46 lb | 3478 | 844.00 |
| EB-300 | 300 x 0.1 lb | 15.75" x 20.3" | 46 lb | 3479 | 844.00 |
| **Options** | | | | | |
| Laundry basket 26.75" x 22" x 11" | | | 14 lb | 4901 | 170.00 |

**EB-150**
**Computing scale**

**Laundry basket**
**23" x 26" top, 18" x 22" base**
**8"high front, 15"high rear**

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

# TOR * REY

**PC-40L**
**Computing Scale**

## PC-40L Price Computing Scale

More precise with 0.005 lb resolution. Highly sanitary stainless steel construction. Alphanumeric Liquid Crystal display for Weight, Price per pound and Total price. Three displays are on the operators side of the scale as well as three displays on the customers side. Keypad 0-9 for entering prices. Keys for ON/OFF. (15) direct access memory keys. (100) price memories. 1/2 lb and 1/4 lb price multiplier feature. Includes RS232 serial interface. Rechargeable battery, 200 hrs approx, included. **Stainless Steel** platform size 14"W x 11"D. Overall size 13-15/16"W x 14-3/16"D x 5-5/8"H. 120 VAC.
NTEP Legal for Trade 95-041.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| PC-40L | 40 lb x 0.01 lb | 19 lb | 1269 | $ 414.00 |
| PC-40LT w/ Tower | 40 lb x 0.01 lb | 26 lb | 1270 | 438.00 |
| **Options** | | | | |
| Z-21900706 AC adapter for PC40L | | 1 lb | 1540 | 19.00 |
| **Service Parts** | | | | |
| Z-21900003 rechargeable battery | | 2 lb | 1272 | 30.00 |

VISIONTECH SHOP

## TVP Price Computing Scale

Standard stainless pan, weigh in pounds, kilogram or ounce. 10 PLU for selection. 15 mm LCD display with white LED backlight standard RS232 inteface. overall 12” x 10.5” x 4”H. Pan 8” x10.5”. Rechargeable battery included. 60 ohms of use without backlight. 120 VAC adapter included. One year warranty.
NTEP Legal for Trade 19-038.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| TVP-12B | 12 lb x 0.002 lb | 8.96 lb | 1959 | $ 398.75 |
| TVP-30B | 30 lb x 0.005 lb | 8.96 lb | 2017 | 398.75 |
| TVP-60B | 60 lb x 0.01 lb | 8.96 lb | 2018 | 398.75 |
| **With Pole** | | | | |
| TVP-30P | 30 lb x 0.005 lb | 12 lb | 2020 | 451.25 |
| TVP-60P | 60 lb x 0.01 lb | 12 lb | 2021 | 451.25 |
| **Options** | | | | |
| DLP-50 label printer | | 2.5 lb | 993 | 361.00 |

**TVP-B**
**Computing Scale**

**TVP-P**
**Computing Scale w/pole**

VISIONTECH SHOP

## DLP-300 Label Printing Scale

Price computing scale with label printer. 30 lb and 60 ft capacity. 20,000 PLU’S, 56 speed keys. 32 standard label formats and 67 custom labels. High speed thermal printer. USB and network for easy firmware updates. Multiple barcode formats. PLU editor, label editor, keypad editor. USB, Ethernet, wireless, Rs-232C. 120 VAC 50/60HZ overall 15.4”x17.3”x16.5”H. One year warranty
NTEP Legal for Trade 17-054.

| Part Number | Capacity | Patform | Weight | SKU | List |
|---|---|---|---|---|---|
| DLP-300 | 30 lb x 0.01 lb<br>60 lb x 0.02 lb | 14.3” x 11.1” | 29 lb | 2087 | $ 1,368.75 |
| **Options** | | | | | |
| DLP-50 label printer | | | 2.5 lb | 993 | 361.00 |

**DLP-300**
**Label Printing Scale**

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

# Over/Under

**CIM-100**
**Over/Under**

## Cardinal

### CIM In Motion Checkweigher

Mild steel construction, epoxy paint. In-motion conveyor scale. Anti-static polyester fabric conveyor belt. Up to 200 ft. per minute belt speed. Package weight up to 200 lb. 1/2 horsepower AC fixed speed motor 230/460 VAC 3 PH, 50/60 Hz. Must add indicator. Suggest Cardinal 225 or Cardinal 825. Custom software is available. $ 200/hr minimum (4) hours. 48"L x 24"W x 32"H

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| CIM-100 | 100 lb x 0.01 lb | 200 lb | 5251 | $ 15,290.00 |
| CIM-200 | 200 lb x 0.02 lb | 200 lb | 5252 | 15,290.00 |

**TLC**
**Over/Under**

## TANITA

### TLC Over/Under Scale

Weighing scale with electronic strain gauge load cell. Over/Under (Hi-Lo) function. Push button TARE. Large(5/8") liquid crystal display(LCD) can be selected to lb or kg. Over/Under mode will give an audible tone above the low set point and below the high set point weight. This means that the tone will only sound when the item on the scale platform is at the correct weight. Self contained, battery operated with (6) size "C" batteries(not included) or AC adapter 9VDC, 300ma output (included). Splash proof construction with **stainless steel** platform size 8-3/4" x 8-3/4". Overall size 9-1/2" x 12-3/8" x 3-1/4"H. USDA Approved.
NTEP Legal for Trade 93-078 III 3,000 div.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| TLC-060A | 6,000 x 2g<br>12 x 0.005 lb | 9 lb | 2444 | $ 295.00 |
| **Service Parts** | | | | |
| Adapter 120VAC to 9VDC, 200ma | | 1 lb | 2446 | 97.70 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.


www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

A&D WEIGHING DIVISION

## FS-Ki Over/Under Scale

Stainless steel construction. Three resolution levels. Large bright comparator lights. 4 function analog sweep display. 99 item data memory. Programmable Tare. Easy to read backlight LCD display. Weighing units are: lb, kg, lb-oz, oz. RS 232/comparator output option. Optional rechargeable battery. 2 year warranty.
NSF certified

| Part Number | Capacity | Pan Size | Weight | SKU | List |
|---|---|---|---|---|---|
| FS-6Ki | 15 x 0.005 lb | 9.8” x 9.8” | 24 lb | 3574 | $ 1,550.00 |
| FS-15Ki | 35 x 0.01 lb | 9.8” x 9.8” | 24 lb | 3575 | 1,550.00 |
| FS-30Ki | 70 x 0.02 lb | 15” x 11.8” | 24 lb | 3576 | 1,805.00 |
| **Options** | | | | | |
| HC-06i Rechargeable battery pack | | | 1 lb | 6786 | 65.00 |
| FS-C 21.5” Extension column (Only for FE-30Ki) | | | 1 lb | 3582 | 200.00 |
| FS-01i Wall mount bracket | | | 1 lb | 3583 | 215.00 |
| FS-03i RS 232C & Comparator output | | | 1 lb | 3584 | 170.00 |
| **Service Parts** | | | | | |
| FS-D Indicator | | | 1 lb | 4005 | 1,135.00 |
| 07:3008855 leveling foor for FSi | | | 0.06 lb | 4006 | 15.90 |
| **Load Cells** | **For use in** | | | | |
| LC:156-6K | FS-6Ki | | 0.57 lb | 3369 | 318.00 |
| LC:156-15K | FS-15Ki | | 0.57 lb | 3370 | 318.00 |
| LC:156-30K | FS-30Ki | | 0.57 lb | 3371 | 318.00 |
| **Service parts for old version FS-K** | | | | | |
| **Load Cells** | **For use in** | | | | |
| LC:FS6K | FS-6K | | 3 lb | 1144 | 519.75 |
| LC:FS15K | FS-15K | | 3 lb | 1145 | 519.75 |
| LC:FS30K | FS-30K | | 3 lb | 1146 | 519.75 |

**FS-15Ki Over/Under**

**FS-30Ki Over/Under**

**2200CW**
**Over/Under**

doran

## 2200CW Over/Under Scale

Expansive 250 product ID database, versatile communications, powerful control options and outstanding PC support software in a simple to use, technologically advanced and extremely rugged package. Quad spring base. Heavy duty 304 stainless steel construction and NEMA 4X classification for washdown protection. 6 digit red LED. Keys for: TARE, GROSS/NET, ZERO, PRINT, UNITS, ACCUM, CLEAR, PROD ID, SET POINT, OVER, UNDER, ENTER, DECIMAL POINT, NUMERIC KEYPAD 0-9. Indicators for net, zero, batt, mot, over, under, accept. Units are lb, oz, kg, g/lb/oz. Two programmable inputs. Two configurable bidirectional RS232 serial ports. Eight digital outputs. 2 year warranty.
NTEP Legal for Trade 06-101 (Indicator)
NTEP Legal for Trade 97-097 (15” x 15”)
NTEP Legal for Trade 05-062 (18” x 18”, 18” x 24”, 24” x 24”)

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| **14” column** | | | | | |
| 2202CW-C14 | 2 x 0.0005 lb | 10” x 10” | 21 lb | 7301 | $ 1,820.00 |
| 2205CW-C14 | 5 x 0.001 lb | 10” x 10” | 21 lb | 7302 | 1,820.00 |
| 2210CW-C14 | 10 x 0.002 lb | 10” x 10” | 21 lb | 7303 | 1,820.00 |
| 2225CW-C14 | 25 x 0.005 lb | 10” x 10” | 21 lb | 7304 | 1,820.00 |
| 2250CW-C14 | 50 x 0.01 lb | 10” x 10” | 21 lb | 7305 | 1,820.00 |
| 2250CW/12-C14 | 50 x 0.01 lb | 12” x 12” | 26 lb | 7306 | 1,930.00 |
| 22100CW/12-C14 | 100 x 0.02 lb | 12” x 12” | 26 lb | 7307 | 1,930.00 |
| 2250CW/15-C14 | 50 x 0.01 lb | 15” x 15” | 45 lb | 7308 | 2,250.00 |
| 22100CW/15-C14 | 100 x 0.02 lb | 15” x 15” | 45 lb | 7309 | 2,250.00 |
| 22200CW/15-C14 | 200 x 0.05 lb | 15” x 15” | 45 lb | 7310 | 2,250.00 |
| **20” column** | | | | | |
| 2250CW/15-C20* | 50 x 0.01 lb | 15” x 15” | 30/41 lb | 7311 | 2,325.00 |
| 22100CW/15-C20* | 100 x 0.02 lb | 15” x 15” | 30/41 lb | 7312 | 2,325.00 |
| 22200CW/15-C20* | 200 x 0.05 lb | 15” x 15” | 30/41 lb | 7313 | 2,325.00 |
| 22100CW/18S-C20* | 100 x 0.02 lb | 18” x 18” | 11/67 lb | 7314 | 2,600.00 |
| 22250CW/18S-C20* | 250 x 0.05 lb | 18” x 18” | 11/67 lb | 7315 | 2,600.00 |
| 22500CW/18S-C20* | 500 x 0.1 lb | 18” x 18” | 11/67 lb | 7316 | 2,600.00 |
| 22250CW/1824-C20* | 250 x 0.05 lb | 18” x 24” | 30/75 lb | 7317 | 2,820.00 |
| 22500CW/1824-C20* | 500 x 0.1 lb | 18” x 24” | 30/75 lb | 7318 | 2,820.00 |
| 22250CW/2424_C20* | 250 x 0.05 lb | 24” x 24” | 30/86 lb | 7319 | 3,180.00 |
| 22500CW/2424-C20* | 500 x 0.1 lb | 24” x 24” | 30/86 lb | 7320 | 3,180.00 |
| 22100CW/2424-C20* | 1000 x 0.2 lb | 24” x 24” | 30/86 lb | 7321 | 3,180.00 |

*sent in (2) boxes.

| | | | | |
|---|---|---|---|---|
| **Service Parts** | | | | |
| 2200CW Digital weight indicator | 6 lb | 7322 | 910.00 |
| SUB0869 keypad (12)screws 2200CW | 1 lb | 7018 | 120.00 |
| SUB0663 keypad (4)screws 2200CW | 1 lb | 7019 | 240.00 |
| **Options** | | | |
| EXOPT118 RS232 10’ cable w/ pigtails | 1 lb | 6100 | 100.00 |
| EXOPT148 RS232 10’ cable 25 pin D female | 1 lb | 6228 | 100.00 |
| EXOPT119 RS232 10’ cable 9 pin D female | 1 lb | 6175 | 100.00 |
| EXOPT147 External DC power 12VDC | 3 lb | 6306 | 266.00 |
| EXOPT136 Stainless steel load cell for 10” base | 2 lb | 6270 | 399.00 |
| EXOPT137 Stainless steel load cell for 12” base | 2 lb | 6283 | 399.00 |
| EXOPT138 Stainless steel load cell for 15” base | 2 lb | 6284 | 399.00 |
| EXOPT115 Remote ZERO switch | 1 lb | 6260 | 120.00 |
| EXOPT116 Remote PRINT switch | 1 lb | 6261 | 120.00 |
| EXOPT117 Remote UNITS switch | 1 lb | 6262 | 120.00 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.


www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287
Totalcomp
Scales & Balances
13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

doran

## 4300 Excel Checkweigher Scale

Stainless steel construction. Unique "Quad Spring" base design eliminates most common load cell damage. 6 digit, 0.56" red LED. Keys are: ZERO, PRINT, UNITS, OVER, UNDER. Weighing Units are: g, lb, kg, oz, lb:oz. Indicators are: g, lb, kg, oz, over, accept, under, neg, zero, mot. 3 or 5 zone checkweighing operations. Shock and overload are protected up to 10 times capacity. Rugged touch panel resists moisture and puncture damage. RS232 bi-directional interface. 115 VAC, 50/60 Hz. 2 year warranty.
Canadian approved AM-5201 & AM-5241
NTEP Legal for Trade (indicator) 97-038
NTEP Legal for Trade (base) 97-097

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| 4302-C14 | 2 x 0.0005 lb | 10" x 10" | 26 lb | 6190 | $ 1,720.00 |
| 4305-C14 | 5 x 0.001 lb | 10" x 10" | 26 lb | 3680 | 1,720.00 |
| 4310-C14 | 10 x 0.002 lb | 10" x 10" | 26 lb | 3681 | 1,720.00 |
| 4325-C14 | 25 x 0.005 lb | 10" x 10" | 26 lb | 3682 | 1,720.00 |
| 4350-C14 | 50 x 0.01 lb | 10" x 10" | 26 lb | 3683 | 1,720.00 |
| 4350/12S-C14 | 50 x 0.01 lb | 12" x 12" | 30 lb | 3684 | 1,830.00 |
| 43100/12S-C14 | 100 x 0.02 lb | 12" x 12" | 30 lb | 3685 | 1,830.00 |
| 4350/15-C14 | 50 x 0.01 lb | 15" x 15" | 45 lb | 5412 | 2,150.00 |
| 43100/15-C14 | 100 x 0.02 lb | 15" x 15" | 45 lb | 5413 | 2,150.00 |
| 43200/15-C14 | 200 x 0.05 lb | 15" x 15" | 45 lb | 5414 | 2,150.00 |
| **Options** | | | | | |
| EXOPT118 RS232 Serial Data Output w/ 4 wire shielded cable, 10 ft, pigtail ends | | | 1 lb | 6100 | 100.00 |
| EXOPT119 RS232 Serial Data Output w/ 4 wire shielded cable, 10 ft, 9 pin female D connector | | | 1 lb | 6175 | 100.00 |
| EXOPT148 RS232 Serial Data Output w/ 4 wire shielded cable, 10 ft, 25 pin female connector | | | 1 lb | 6228 | 100.00 |
| EXOPT115 Remote switch for ZERO, non washdown | | | 1 lb | 6260 | 120.00 |
| EXOPT116 Remote switch for PRINT, non washdown | | | 1 lb | 6261 | 120.00 |
| EXOPT117 Remote switch for UNITS, non washdown | | | 1 lb | 6262 | 120.00 |
| EXOPT136 Stainless steel load cell for 10" x 10" base | | | 2 lb | 6270 | 399.00 |
| EXOPT137 Stainless steel load cell for 12" x 12" base | | | 2 lb | 6283 | 399.00 |
| EXOPT138 Stainless steel load cell for 15" x 15" base | | | 2 lb | 6284 | 399.00 |
| EXOPT147 External DC power (12VDC) | | | 3 lb | 6306 | 266.00 |
| **Service parts** | | | | | |
| 4300M Digital Weight Indicator only | | | 9 lb | 6216 | 810.00 |
| SUB0438 gasket set(4) holes | | | 1 lb | 6263 | 41.50 |
| SUB0847 gasket set(12) holes | | | 1 lb | 6264 | 41.50 |
| SUB0823 footswitch w/quick disconnect | | | 1 lb | 6227 | 242.85 |

**4300 Checkweigher Over/Under**



Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

Totalcomp

**TCM2 Series Counting Scale**

**Optional Printer**

**Optional second Base**

## TCM2 Counting Scale

Your perfect solution for your everyday high accuracy counting. The TCM2 is a single platform counting scale and includes a free connection for a second platform. The second platform can be added at any time and have either a larger or smaller capacity. This is important if you are counting large amounts such as on a pallet which cannot be placed on the main platter. Large 0.7" LCD blue back lighted display. TCM2 has 256 items memory locatios for individual piece weight, tare weight and units (lb or kg). Three displays for WEIGHT, PIECE WEIGHT, COUNT. Front panel audible and tactile feedback keys for: ON/OFF, 0-9 KEYPAD, NET/GROSS, SCALE 1-2, UNIT, PCS, PcWt, ST.UTP, RC.UTP, PRINT, TARE, CLEAR, ENTER, EXIT. Annunciators for: Zero, Stable, Tare, Gross, Net, Print, Kg, Lb, Scale, 1-2, CHG, AC. Stainless steel platter 9" x 13" with spill guard. Front bubble level and adjustable rubber feet for easy leveling. Rechargeable battery included. Battery operating time is 60 hours. Time and date, RS232 output. 110 VAC power supply.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| TCM2-15 | 15 x 0.0005 lb | 9" x 13" | 14 lb | 5902 | $ 448.00 |
| TCM2-30 | 30 x 0.001 lb | 9" x 13" | 14 lb | 5903 | 448.00 |
| TCM2-60 | 60 x 0.002 lb | 9" x 13" | 14 lb | 5904 | 448.00 |
| **Service Parts** | | | | | |
| Keypad board for TCM2 | | | 1 lb | 4375 | 107.00 |
| Keypad overlay for TCM2 | | | 1 lb | 4376 | 47.60 |
| Display board for TCM2 | | | 1 lb | 4422 | 142.00 |
| Display overlay for TCM2 | | | 1 lb | 4423 | 41.70 |
| Main board for TCM2 | | | 1 lb | 4432 | 261.00 |
| AC adapter 12 VDC/600mA For TCM2 | | | 1 lb | 4433 | 57.00 |
| Battery lead acid | | | 4 lb | 6114 | 35.09 |
| Stainless steel platter for TCM2 | | | 3 lb | 4439 | 97.30 |
| Plastic platter for TCM2 | | | 2 lb | 4440 | 50.00 |
| Leveling foot, each set of (4) for TCM2 | | | 1 lb | 4518 | 17.40 |





www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp®
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

A&D WEIGHING DIVISION

## HCi Counting Scale

Simple and easy operation with high performance counting function. Keys are: ON OFF, ZERO, KEYBOARD TARE, TARE, ID, KEYBOARD, SAMPLE, STORE UNIT WEIGHT, ENTER, PRINT, TOTAL, M+, *, RESET, 0-9, C. 7 segment LCD. Navigation system with LED for easy and simple operation. Up to 99 unit weights ID memory function. Auto power OFF function. Automatic Counting Accuracy Improvement (ACAI). Audible Weighing Assist (AWA) beeping function. Detachable display unit. Comparator function with “HI”, “OK”, “LO” display. Accumulation function. Universal Flex Coms function. Full digital calibration function. 120 VAC AC adapter. Platform size 11.8” x 8.3”. Overall size 12.4”W x 13”D x 5”H.

**HC-6Ki Counting Scale**

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| HC-3KA | 6 x 0.001 lb | 11 lb | 3212 | $ 560.00 |
| HC-3Ki | 6 x 0.001 lb | 11 lb | 6780 | 930.00 |
| HC-6Ki | 15 x 0.002 lb | 11 lb | 6781 | 930.00 |
| HC-15Ki | 30 x 0.005 lb | 11 lb | 6782 | 930.00 |
| HC-12KA | 30 x 0.005 lb | 11 lb | 3214 | 560.00 |
| HC-30Ki | 60 x 0.01 lb | 11 lb | 6783 | 930.00 |
| **Options** | | | | |
| HC-03i RS 232C | | 1 lb | 6784 | 105.00 |
| HC-04i RS 232C Relay output | | 1 lb | 6785 | 130.00 |
| HC-06i Rechargeable Battery Pack | | 1 lb | 6786 | 65.00 |
| HC-08i Extension cable | | 1 lb | 6787 | 80.00 |
| **Service Parts** | | | | |
| 07:1000409 platform support HCi | | 1 lb | 6742 | 23.32 |
| 07:4011266A adjustable foot | | 0.05 lb | 2986 | 10.60 |

A&D WEIGHING DIVISION

## HD Counting Scale

High performance, affordable, great features. A version is for simple operation w/one LCD display. B version has 10-key pad for entry of tare weight, piece weight and sample size w/three LCD displays for WEIGHT, UNIT-WEIGHT, COUNT. Key functions are /TOTAL, SAMPLE, ENTER/M+PRT, MODE/RESET, ZERO, TARE. Counting resolution 1/240,000 max count 120,000. Automatic Counting Accuracy Improvement. Optional rechargeable battery pack. Standard with 120 VAC AC adapter and (6) ‘C’ batteries. Platform size 8.5” x 11.57”(HC), 11.81” x 14.96”(HD). Overall size is 12.6” x 13” x 4.65”H(HC), 16.18” x 18.5” x 4.72”H(HD).

**HD-12KA Counting Scale**

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| **Detachable display head** | | | | |
| HD-12KA | 30 x 0.005 lb | 26 lb | 3221 | $ 1,350.00 |
| HD-30KA | 60 x 0.01 lb | 26 lb | 3222 | 1,350.00 |
| HD-60KA | 120 x 0.02 lb | 26 lb | 3223 | 1,350.00 |
| HD-12KB w/keypad | 30 x 0.005 lb | 26 lb | 3224 | 1,515.00 |
| HD-30KB w/keypad | 60 x 0.01 lb | 26 lb | 3225 | 1,500.00 |
| HD-60KB w/keypad | 120 x 0.02 lb | 26 lb | 3226 | 1,500.00 |
| **Options** | | | | |
| HD-03 RS232 output for HD Series | | 1 lb | 3227 | 159.00 |
| HD-04 Comparator output for HD Series | | 1 lb | 3228 | 235.00 |
| HD-05 20ma current loop output for HD Series | | 1 lb | 3229 | 160.00 |
| HD-06 Carrying handle for HD Series | | 2 lb | 3230 | 120.00 |
| **Service Parts** | | | | |
| TB:662 AC adapter 120VAC | | 1 lb | 1305 | 50.00 |
| TB:164 AC adapter 220VAC | | 1 lb | 4612 | 75.00 |

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

**FCi**
**Counting Scale**

A&D WEIGHING DIVISION

## FCi Counting Scale

High resolution: FC-Si has 1/5,000,000 internal and 1/20,000 display. FC-i has, 1/1,000,000 internal and 1/10,000 display. Four bright easy to read fluorescent displays for weight, average piece weight, piece count, item code, tare weight and accumulator. Durability for use in industrial environments. 500 Memories (with 6 digit ID) for unit weights, tare weights, alphanumeric names/codes (12 digits), accumulators & comparator limits. Standard RS232 interface with optional 2nd and 3rd RS232. Optional remote scale connector. Optional NiMH battery packs runs for up to 10 hours between charges. 120VAC. 12.5"W x 17"D x 3.66"H

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| FC-500Si | 1 x 0.00005 lb | 5" x 5" | 19 lb | 6129 | $ 2,315.00 |
| FC-5000Si | 10 x 0.0005 lb | 6.5" x 6.5" | 19 lb | 6130 | 2,315.00 |
| FC-500i | 1 x 0.0001 lb | 6" x 8" | 19 lb | 6523 | 1,680.00 |
| FC-1000i | 2 x 0.0002 lb | 6" x 8" | 19 lb | 6524 | 1,680.00 |
| FC-2000i | 5 x 0.0005 lb | 11" x 11.8" | 19 lb | 6525 | 1,680.00 |
| FC-5000i | 10 x 0.001 lb | 11" x 11.8" | 19 lb | 6131 | 1,680.00 |
| FC-10Ki | 20 x 0.002 lb | 11" x 11.8" | 19 lb | 6132 | 1,680.00 |
| FC-20Ki | 50 x 0.005 lb | 11" x 11.8" | 19 lb | 6133 | 1,680.00 |
| FC-50Ki | 100 x 0.01 lb | 11" x 11.8" | 21 lb | 6134 | 1,680.00 |
| **Options** | | | | | |
| FC-02i Rechargeable NiMH battery pack for FCi | | | 5 lb | 6135 | 545.00 |
| FC-03i Second & third RS232 for FCi | | | 1 lb | 6136 | 310.00 |
| FC-04i RS232/Comparator/relays/Buzzer for FCi<br>Can install either FC-03i or FC-04i | | | 1 lb | 6137 | 360.00 |
| FC-05i Remote scale connection for FCi | | | 1 lb | 6138 | 200.00 |
| CC:110 Carrying & storage case for FCi | | | 5 lb | 6526 | 165.00 |
| **Service parts** | | | | | |
| 08:200776A keysheet | | | 1 lb | 6140 | 31.80 |
| PZ:3822A display board | | | 1 lb | 6078 | 610.56 |
| 07:3005802A display filter | | | 1 lb | 6079 | 14.84 |
| TB:636 Adapter 120VAC | | | 2 lb | 1304 | 50.00 |
| TB:137 Adapter 220VAC | | | 1 lb | 3001 | 75.00 |

## CCT Counting Scale

Ideal for use in warehouses, manufacturing processes, and production facilities, the CCT bench counting scale is practical for any counting application. Quickly check the number of pieces in a carton or container, helps reduce waste when filling orders or packaging shipments. Optional USB interface simplifies data communication. Rechargeable battery included for operation almost everywhere. Programmable auto power-off to save energy. Parts counting optimization automatically refines piece weight as parts are added. Built in memory for storing products and settings. Intuitive software is user-friendly and keeps track of the count, automatically optimizing the unit weight for greater accuracy. The programmable backlit display can be customized to be "always on", "always off" or to light only weighing. Platform 8.3" x 11.8".

| Part Number | Capacity | Nominal | Weight | SKU | List |
|---|---|---|---|---|---|
| CCT 4 | 8 x 0.0002 lb | 4 kg x 0.1 g | 11 lb | 2506 | $ 755.00 |
| CCT 8 | 16 x 0.0005 lb | 8 kg x 0.2 g | 11 lb | 2507 | 755.00 |
| CCT 16 | 35 x 0.001 lb | 16 kg x 0.5 g | 11 lb | 2508 | 755.00 |
| CCT 32 | 70 x 0.002 lb | 32 kg x 1 g | 11 lb | 2509 | 755.00 |
| CCT 48 | 100 x 0.005 lb | 48 kg x 2 g | 11 lb | 2510 | 755.00 |
| **Ultra High Resolution** | | | | | |
| CCT 8UH | 16 x 0.0001 lb | 8 kg x 0.05 g | 11 lb | 2511 | 910.00 |
| CCT 16UH | 35 x 0.0002 lb | 16 kg x 0.1 g | 11 lb | 2512 | 910.00 |
| CCT 32UH | 70 x 0.0005 lb | 32 kg x 0.2 g | 11 lb | 2513 | 910.00 |
| CCT 48UH | 100 x 0.001 lb | 48 kg x 0.5 g | 11 lb | 2514 | 910.00 |

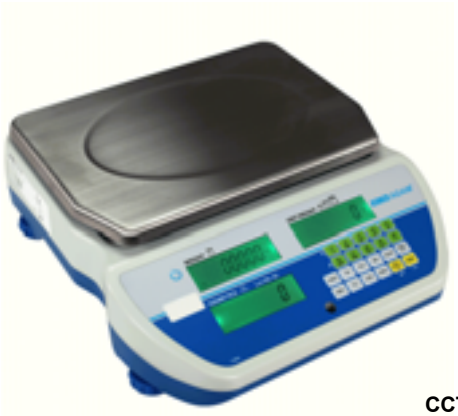

**CCT Counting Scale**

## GFC Floor Counting Scale

GFC counting scales simplify complex counting applications involving heavier loads. The GFC indicator can be mounted on the enclosed pillar or used on the bench depending on your viewing needs. Splash proof keypad, backlit 3 x 6 inch LCD. Keys for: SAMPLE, MEMORY PLUS, UNIT/WEIGHT/UNIT, PST/ZERO, ON, OFF. Auto calibration through keypad, overload indicator, preset count with alarm, low battery indicator, auto power off. Platform size 15.7" x 19.7". Overall size 16" x 24" x 34". 9 VDC rechargeable battery, 70 hours of operation. 120VAC Power supply adapter supplied as standard. Two year warranty.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| GFC165a | 165 lb x 0.01 lb | 34 lb | 6965 | $ 1,280.00 |
| GFC330a | 330 lb x 0.02 lb | 34 lb | 6966 | 1,280.00 |
| GFC660a | 660 lb x 0.05 lb | 34 lb | 6967 | 1,440.00 |
| **Service Parts** | | | | |
| 302409160 adapter 120 VAC | | 1 lb | 252 | 53.33 |

**GFC Series Floor Counting Scale**



Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

**SC10P**
**Counting Scale**

## SC Counting Scale

Counting scale with precise 5 digit unit weight calculation. 1,000 items of unit weight memory. Kilogram/pound conversion. Built in count comparator. Bright and easy to read green fluorescent displays for Weight, Unit Weight and Count. Three methods for entry of piece weight; with the keyboard, by weighing the actual sample or with internal memory and tare values. High internal counting resolution 1/100,000. Count comparator function. Count add up function. Keys for ENTRY, SAMPLE, CALL, STORE, M+, TOTAL, ZERO, TARE, g/lb, MODE, SET, PRINT, and 0-9 numeric. Platform size 14.6" x 11". Overall size is 15.3" x 14.4" x 5.9"H. 120 VAC, 10 watt.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| SC-05P | 10 lb x 0.002 lb | 19 lb | 2632 | $ 567.00 |
| SC-10P | 25 lb x 0.005 lb | 19 lb | 2633 | 567.00 |
| SC-25P | 50 lb x 0.01 lb | 19 lb | 2634 | 567.00 |
| **Service Parts** | | | | |
| KSC2 keypad SC series, bottom cable, old version | | 0.27 lb | 2642 | 57.14 |
| KSC1 keypad SC series, top cable, new version | | 0.27 lb | 2643 | 57.14 |

**EC Series**
**Counting Scale**

## EC Counting Scale

Counting scale with accurate count and high resolution. Easy to read LCD display and blue backlight. Soft tact keyboard. Function keys for ON/OFF. Units of measure displays kg, g, or lb. 100 unit weight memory and accumulation functions. RS232C interface. Rechargeable battery with 80 hours continuous use, 12 hour recharge time. AC adapter included. Platter size 12"W x 8.74"D. Overall size 13"W x 13.6"D x 4.2"H

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| EC-6 | 6 x 0.0002 lb | 12 lb | 7441 | $ 395.00 |
| **Options** | | | | |
| YEC1 adapter 12VDC 800 ma<br>must be programmed for EC | | 1 lb | 7476 | 33.00 |

**EC-2 Series**

## EC2 Counting Scale Dual Channel

Designed with CAS reliability, the EC-2 Series Counting Scale stands alone its field. High accuracy and simple to use. Optional label or receipt printer. Great for use in manufacturing, parts shops, hardware stores, etc. Easily Connects Second Platform to Expand Capacity. Save Up to 200 Presets. Up to 4 External Devices can be used simultaneously. Lb/kg or Lb/g Switchable

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| EC2-6 | 6 x 0.0002 lb | 10 lb | 297 | $ 519.00 |
| EC2-15 | 15 x 0.0005 lb | 10 lb | 298 | 519.00 |
| EC2-30 | 30 x 0.001 lb | 10 lb | 299 | 519.00 |
| EC2-60 | 60 x 0.002 lb | 10 lb | 300 | 519.00 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.


www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

PENNSYLVANIA

## 7600 Counting Scale

Heavy duty cast construction. Full numeric keyboard for entry of Tare weight, 6 digit ID, Sample quantity and Average piece weight. Easy one button counting. Auto sample update for improved accuracy. 1 part in 1 million internal resolution. Bright green LED display with time and date. Weight is displayed in two different units of measure and count. Keys for ZERO, SAMPLE SET, GROSS/NETT, TARE, PIECE WEIGHT, KEYPAD TARE, 0-9 KEYPAD, BASE, UNITS, PRINT, CLEAR, %, CHECK, ON/OFF, ENT. RS232 base for larger or smaller loads. Optional battery for portable operation.
120VAC, 15.5"W x 14"D x 5.25"H.
NTEP Legal for Trade 91-149

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| 7600-2 | 2 x 0.0002 lb | 8" x 8" | 17 lb | 6554 | $ 1,315.00 |
| 7600-5 | 5 x 0.0005 lb | 8" x 8" | 17 lb | 6555 | 1,315.00 |
| 7600-10 | 10 x 0.001 lb | 12" x 14" | 17 lb | 6556 | 1,315.00 |
| 7600-20 | 20 x 0.002 lb | 12" x 14" | 17 lb | 6557 | 1,315.00 |
| 7600-50 | 50 x 0.005 lb | 12" x 14" | 17 lb | 6558 | 1,315.00 |
| 7600-100 | 100 x 0.01 lb | 12" x 14" | 17 lb | 6559 | 1,315.00 |
| 7600-150 | 150 x 0.02 lb | 12" x 14" | 17 lb | 6560 | 1,315.00 |
| 7600-200 | 200 x 0.02 lb | 12" x 14" | 17 lb | 6561 | 1,315.00 |
| **Options** | | | | | |
| 57834 Remote base option Dual scale counting | | | 1 lb | 6562 | 275.00 |
| 48445 Base connector kit* | | | 1 lb | 6581 | 33.00 |
| **Service Parts** | | | | | |
| 57520 12VDC Battery pack | | | 4 lb | 6553 | 105.00 |
| 57512-3 display board | | | 1 lb | 6659 | 154.00 |

*Needed w/ Remote base option when connecting to a base that is not a PA model.

**7600**
**Counting Scale**

PENNSYLVANIA

## 7500 Counting Scale

Easy one button counting. Auto sample update for improved accuaracy. 1 prt in 1 million internal resoulution. Bright green LED display Weight is displayed in two different units of measure and count. Keys for: ZERO, SAMPLE SET, UNITS, PRINT. Optional battery for portable operation. RS232 bidirectional interface for printers, data collection or manifest systems. 120VAC, 15.5"W x 14"D x 5.25"H.
NTEP Legal for Trade 91-149

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| 7500-2 | 2 x 0.0002 lb | 8" x 8" | 17 lb | 6543 | $ 1,215.00 |
| 7500-5 | 5 x 0.0005 lb | 8" x 8" | 17 lb | 6544 | 1,215.00 |
| 7500-10 | 10 x 0.001 lb | 12" x 14" | 17 lb | 6545 | 1,215.00 |
| 7500-20 | 20 x 0.002 lb | 12" x 14" | 17 lb | 6546 | 1,215.00 |
| 7500-50 | 50 x 0.005 lb | 12" x 14" | 17 lb | 6547 | 1,215.00 |
| 7500-100 | 100 x 0.01 lb | 12" x 14" | 17 lb | 6548 | 1,215.00 |
| 7500-150 | 150 x 0.02 lb | 12" x 14" | 17 lb | 6549 | 1,215.00 |
| 7500-200 | 200 x 0.02 lb | 12" x 14" | 17 lb | 6550 | 1,215.00 |
| **Service Parts** | | | | | |
| 57520 12VDC Battery pack | | | 4 lb | 6553 | 105.00 |
| 57512-3 display board | | | 1 lb | 6659 | 154.00 |

**7500**
**Counting Scale**

Ranger 3000

## Ranger 3000 Counting Scale

ABS housing, **stainless steel** platform, numeric keypad, upfront level indicator, 30 item library. Weighing modes: weighing and parts counting with auto optimization. 3 color LED checkweighing lights, Accumulation, 120VAC power or rechargeable battery(included) 210 hour. RS232 output, auto print setting, auto shut-off.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| RC31P1502 | 3 x 0.0001 lb | 8.9” x 11.8” | 12 lb | 8011 | $ 1,281.00 |
| RC31P3 | 6 x 0.0002 lb | 8.9” x 11.8” | 12 lb | 8012 | 1,281.00 |
| RC31P6 | 15 x 0.0005 lb | 8.9” x 11.8” | 12 lb | 8013 | 1,281.00 |
| RC31P15 | 30 x 0.001 lb | 8.9” x 11.8” | 12 lb | 8014 | 1,281.00 |
| RC31P30 | 60 x 0.002 lb | 8.9" x 11.8" | 12 lb | 8015 | 1,281.00 |
| **Options** | | | | | |
| 30037446 PCBA kit, Second Platform | | | 1 lb | 3010 | 245.00 |
| 30037447 Ethernet kit | | | 1 lb | 7968 | 245.00 |
| 30037448 RS232 kit | | | 1 lb | 7969 | 245.00 |
| 30037449 USB kit | | | 1 lb | 3819 | 245.00 |
| 30064203 SF40A Dot Matrix printer, includes RS232 cable | | | 2 lb | 1754 | 1,552.00 |
| 80500525 cable RS232 IBM 9 pin male to female | | | 1 lb | 3047 | 304.00 |
| 80850080 WinWedge software | | | 1 lb | 2436 | 837.00 |





www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

OHAUS®

## Ranger 4000 Counting Scale

Sturdy cast aluminum housing for tough industrial weighing. 1,500,000 internal count, 30 item library. Weighing modes: weighing, part counting with optimization, check weighing and accumulation. LCD display, 3 color check weighing LEDS. 120 VAC power or rechargeable battery (included). RS232 output, **stainless steel** platform, up front level indicator, adjustable leveling feet, auto-print settings. Indicators for: stability,overload, underload and low battery. Auto tare, Auto shut-off.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| RC41M3 | 6 x 0.0002 lb | 8.9” x 11.8” | 16 lb | 8007 | $ 1,543.00 |
| RC41M6 | 15 x 0.0005 lb | 8.9” x 11.8” | 16 lb | 8008 | 1,543.00 |
| RC41M15 | 30 x 0.001 lb | 8.9” x 11.8” | 16 lb | 8009 | 1,543.00 |
| RC41M30 | 60 x 0.002 lb | 8.9” x 11.8” | 16 lb | 8010 | 1,543.00 |
| **Options** | | | | | |
| 30037446 PCBA kit Second Platform | | | 1 lb | 3010 | 245.00 |
| 30037447 Ethernet kit | | | 1 lb | 7968 | 245.00 |
| 30037448 RS232 kit | | | 1 lb | 7969 | 245.00 |
| 30037449 USB kit | | | 1 lb | 3819 | 245.00 |
| 30064203 SF40A Dot Matrix printer, includes RS232 cable | | | 2 lb | 1754 | 1,552.00 |
| 80500525 Cable to IBM 9 pin serial | | | 1 lb | 3047 | 304.00 |
| 80850080 WinWedge software | | | 1 lb | 2436 | 837.00 |

**Range 4000**

**C-30**
**Counting Scale**

## C Counting Scale

1/300,000 resolution. Portable, with built-in battery pack. Includes second scale input port for remote base. Sleep mode for extended battery life. Preset count and weight limits, LCD display with backlight. 0.75" high. Units: lb, kg. 15,000 weight divisions. Color-coded key pad and vinyl dust cover. Memory accumulators, weight and piece weight up to 5 digits, count up to 6 digits. 115 VAC 50/60Hz, 11.75"W x 12.63"D x 4.25".

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| C30 | 30 x 0.002 lb | 8.25" x 11.38" | 13 lb | 5245 | $ 640.00 |
| C65 | 65 x 0.005 lb | 8.25" x 11.38" | 13 lb | 5246 | 640.00 |
| C100 | 100 x 0.01 lb | 8.25" x 11.38" | 13 lb | 5243 | 640.00 |
| **Service Parts** | | | | | |
| 6540-1123 Foot leveling 3/8-16x1-1/4" | | | 0.07 lb | 5250 | 24.00 |

## Supercount

Service parts only for supercount

| Part Number | Weight | SKU | List |
|---|---|---|---|
| **Service Parts** | | | |
| 404611 keypad, SC | 1 lb | 6056 | $ 927.84 |
| 409250-02 keypad, Supercount II | 1 lb | 6081 | 467.80 |

TBS-300 w/ 24” x 24” base
Baggage Scale



Totalcomp

## Baggage Scale Kit

This baggage scale indicator kit consists of
(2) Remote digital weight displays, panel mountable.
(1) Electronic control unit, high impact plastic, contains power supply and A/D.
(2) Switches for LB/KG and ZERO/ON/OFF for remote mounting, includes cables for switches.
The remote displays have 0.56” high LEDs, bezels for panel mounting, and 10 ft of heavy duty data cable that connects to the control unit. The indicator kit is factory set up for use with a 300kg 2mv/v load cell. The scale base offered below is set up for the indicator kit.

TBS Indicator

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| TBS-300 Indicator kit | 300 x 0.5 lb | 10 lb | 537 | $ 819.00 |

**Bases** Select the base below for use with the indicator kit above

| | | | | |
|---|---|---|---|---|
| **24” x 24” Platform** x 5.25” High | | | | |
| TPB-2424-500-SS | 500 lb | 120 lb | 3947 | 1,905.00 |

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

# Baggage

**64 Baggage scale**
**24”x24” base**
**Displays for both agent and passenger**

PENNSYLVANIA

## 64 Baggage Scale

This baggage scale consists of
(1) 24” x 24” x 5”H Stainless steel platform with black painted steel base.
(2) Digital weight displays, panel mounted, with 10’ cable each.
Agent display is weight readout and pushbuttons for ZERO, LB/KG, and PRINT.
Passenger display is weight readout only.
Both displays have 0.56” high LEDs, stainless steel bezels for panel mounting, and 10 ft of heavy duty data cable that connects to the scale base. Bezels are 7.25”W x 5.25”H and have (4) mounting holes. Cutout necessary is 5.75”W x 3.5”H. RS232 interface using DB-9 connector. 110VAC 50/60 Hz. Two year warranty.
NTEP Legal for Trade 98-013

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| 64-2424 Baggage scale | 500 x 0.1 lb | 90 lb | 3298 | $ 2,445.00 |
| **Service Parts** | | | | |
| 57409-8 Overlay w/button for 64 | | 1 lb | 2688 | 50.00 |
| 49737-6 Level foot 2” dia x 1/2-20 | | 1 lb | 310 | 32.00 |




www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

doran

## DBS Baggage Indicator

Stainless steel face plate. Outstanding durability and reliability. 6 digit, 0.56" high red LED display. Damage to the electronics from electrostatic discharge generated by the dry airport environment is prevented through advanced electronics design, backed up with extensive testing and decades of field proven reliability. Baggage weight is easily read from up to 20 ft on the large and bright LED display. When baggage is placed on the scale base, the displayed weight quickly stabilizes on the main and remote display to support fast passenger check in. The entire scale electronics is contained in the panel mount Main Display. No additional electronics control box to install inside the counter. Simply install the Main and Remote Displays into counter cutouts and connect the foolproof, keyed and locking cables through the counter, strain reliefs ensure that once the cables are connected, they stay connected. For use with scale base ordered seperately. Load cell in base should be 2 or 3 mv/v output. Keys for: ZERO (ON/OFF), UNITS. Units are lb or kg. Indicators for: lb, kg, NEG, ZERO, MOT. Bi-directional RS-232. Panel mount display cut out size is 6.5" x 3.3" x 1.75" deep. 115 VAC 60Hz wall mount transformer. UL/ULc (230 VAC optional). 1 year parts and labor.
NTEP Legal for Trade 05-061

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| DS100BMR Indicator Baggage Kit | 300 x 0.5 lb | 8 lb | 302 | $ 600.00 |
| **Service Parts** | | | | |
| PCA0325 main board for DS100 | | 1 lb | 117 | 256.00 |
| SWI0147 touch panel DS100-BM main | | 0.03 lb | 3796 | 71.42 |
| SWI0148 touch panel DS100-BR remote | | 0.03 lb | 3779 | 71.42 |

**DS100**
**Baggage Indicator**
**Main display**

**DS100**
**Baggage Indicator**
**Remote display**

**Select one base for use with indicator kit above.**

doran

## DMS Series Mild Steel Scale Bases

Heavy gauge steel construction. All square tube construction. Seven overload stops provide 250% protection shielding the load cell from damaging shock. Royal blue Epoxy paint. Four adjustable feet and a bubble level to allow precise leveling in your work area.
Two year warranty
NTEP Legal for Trade 05-062

| Part Number | Capacity | Load Cell | Weight | SKU | List |
|---|---|---|---|---|---|
| **24 x 24 Platform x 5.25" high** | | | | | |
| DMS5250 | 250 lb | 1260-150kg | 83 lb | 6861 | $ 1,150.00 |
| DMS5500 | 500 lb | 1260-300kg | 83 lb | 6862 | 1,150.00 |
| DMS51000 | 1000 lb | 1260-500kg | 83 lb | 6863 | 1,150.00 |

**DMS Series**
**Mild Steel Scale Bases**



Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.

Totalcomp

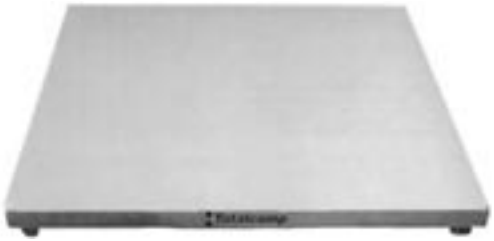

**Hazardous Floor Base**

## Hazardous Floor Base

High performance powder coated heavy duty floor scale for hazardous environment. Already configured with FM Approved summing box, load cells and hazardous home run cable. Standard features include: Top access FM Approved signal trim junction box. 20ft blue jacket hostile environment load cell cable. 4 NTEP FM Approved alloy steel shear beam load cells. Heay powder coated diamond safety deck. 4 adjustable mild steel foot. Threaded eye bolt holes for easy lifting. Top holes for easy leveling.
NTEP Legal for Trade 16-016

| Part Number | Weight | SKU | List |
|---|---|---|---|
| T3x3-2.5K | 240 lb | 8142 | $ 1,956.57 |
| T3x3-5K | 240 lb | 8143 | 1,956.57 |
| T3x3-10K | 245 lb | 8144 | 2,315.94 |
| T3x4-2.5K | 280 lb | 8145 | 2,077.57 |
| T3x4-5K | 280 lb | 8146 | 2,077.57 |
| T3x4-10K | 285 lb | 8147 | 2,495.02 |
| T4x4-2.5K | 370 lb | 8148 | 2,107.82 |
| T4x4-5K | 370 lb | 8149 | 2,107.82 |
| T4x4-10K | 375 lb | 8150 | 2,647.48 |
| T4x5-2.5K | 430 lb | 8151 | 2,284.48 |
| T4x5-5K | 430 lb | 8152 | 2,284.48 |
| T4x5-10K | 435 lb | 8153 | 2,824.14 |
| T5x5-2.5K | 540 lb | 8154 | 2,377.65 |
| T5x5-5K | 540 lb | 8155 | 2,377.65 |
| T5x5-10K | 545 lb | 8156 | 3,062.51 |
| **Service Parts** | | | |
| (1) FM J Box & (20)ft FM cable blue<br>Both items shipped in same box | 1 lb | 7114 | 272.00 |

**HW-CEP**

A&D WEIGHING DIVISION

## HW-CEP Intrinsically Safe For Hazardous Enviroments

Bench Scale for use in hazardous locaions that required intrisincally safe equipment. Certified safe for use in FM class 1, Division 1, groups C+D hazardous areas. Stainless steel weighing pan. resists chemicals., scratches and rust. IP65 base is easy to clean. Long battery life with (4) D approval batteries. Indicator for weight, stable,net, zero, PT, hold, MT. keys for: SET, HOLD, COMP, MT, MODE, ON/OFF, Zero, TARE, 0-9, C, ENTER. Overall 9.84” x 17.28” x 15.53” H on hw-10kCEP
12.89” x 23.03” x 30.55” H on HW-60kCEP. 15.35” x 27.2” x 30.55” H on HW-100kCEP and HW-200kCEP.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| HW-10KCEP | 20 x 0.002 lb | 9.8” x 9.8” | 18 lb | 1464 | $ 2,725.00 |
| HW-60KCEP | 150 x 0.002 lb | 13” x 16.7” | 27 lb | 1465 | 3,065.00 |
| HW-100KCEP | 200 x 0.02 lb | 15.4” x 20.9” | 40 lb | 1466 | 3,545.00 |
| HW-200KCEP | 500 x 0.05 lb | 15.4” x 20.9” | 40 lb | 1467 | 3,815.00 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.


www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287



13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

## PS500 Animal Scale

All stainless steel construction. Rubber slip mat included with each unit. Animals enjoy the slip free surface and are weighed easily. Compact, light weight, accurate and reliable. Weighing modes: lbs, kg. 0.675" 7 segment LCD display. Hold feature, internal rechargeable batteries, auto power shut off. 8 hours continuous use with full charge. A display bracket is included for desk or wall mounting of indicator. 7VDC NI-MH battery, 15VDC 300mA AC adapter included. Indicator 6.5"W x 1.2"D x 3.2"H

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| PS500-22S | 550 x 0.2 lb | 22" x 22" x 2" | 35 lb | 3414 | $ 727.00 |
| PS500-36S | 550 x 0.2 lb | 22" x 36" x 2" | 55 lb | 3415 | 785.00 |
| PS500-42S | 550 x 0.2 lb | 22" x 42" x 2" | 65 lb | 3416 | 848.00 |
| **Service Parts** | | | | | |
| AWT05-501533 adapter 9V | | | 1 lb | 3409 | 60.19 |

**PS500-22S**
**Animal Scale**



## TM901 Animal Scale

Veterinary animal scale. Powder coated steel base with stainless steel removable platform cover. 2' large LCD display with blue back light. Rubber mat included for non-slip weighing surface. Compact with handle and transportation wheels. Easy to level with adjustable rubber feet. 300 lb/150 kg capacity. Weighing units: lb, kg, oz. Function keys: Hold, Tare, Zero, ON/Off. Hold function will take measurement even if the animal is moving on the platform. Indicator has ABS enclosure with quick disconnect for load cell and AC adapter. 6' cable from indicator to base. Built in rechargeable battery with 30 hours running time without backlight. Low battery symbol on display will remind you to recharge indicator. Desk or wall mountable. 1 year warranty.

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| TM901-150 | 150kg x 50g | 38" x 20" x 2" | 64.7 lb | 4924 | $ 703.01 |
| **Service Parts** | | | | | |
| 111700067 indicator bracket TM901 | | | 2 lb | 4920 | 31.46 |
| 111800245 rubber mat 38"x20" TM901 | | | 2 lb | 4847 | 107.21 |

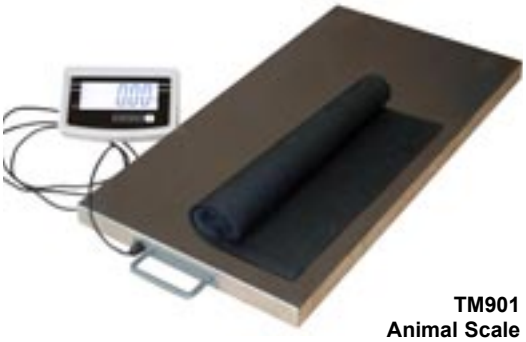

**TM901**
**Animal Scale**
**W/ Rubber Mat**

## TM902 Animal Scale

Light weight, easy to use small animal Veterinary scale. 0.75" LCD display with blue back light. Keys for Tare, Zero, Hold, On/Off. Unit is changeable between kg/lb by pressing the "O" button and holding for 2 seconds. Hold feature for animal weighing while the animal is on the weighing pan the indicator will hold the weight even if the animal is moving on the platform. Stainless steel removable platter. Adjustable feet with front bubble level. Coil cord between indicator and base is 10' in length. In-use cover included. Powered by internal rechargeable battery. AC adapter for charging included.

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| TM902 | 30 x 0.01 kg | 12" x 10" | 11 lb | 3960 | $ 302.50 |

**TM902**
**Animal Scale**

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

**A520BT**
**Body fat**

VISION TECH SHOP

## A520BT Vision Tech Body Fat

Body fat scale 396 lb capacity. 12” x 12” with large LED display. Blutooth connection to your smart phone. Weight units: lb or kg. Measurements are body weight, BMI(Body mass index), Body Fat, water Skeletal Muscle, Bone Mass, Protein, Calorie and Body age. (4) AAA bateries included. Auto turn on with sense technology. Auto off after 30 seconds at Zero or 35 seconds after weighing data is removed. One year Warraty.

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| A520BT | 396 x 0.2 lb<br>180kg x 0.1kg | 12” x 12 x 1” | 5 lb | 6090 | $ 73.75 |

**520BP Bath**

VISION TECH SHOP

## 520B Vision Tech Bath

Bath scale 396 lb capacity. 12” x 12” with large LED display. Blutooth connection to your smart phone. Weight units: lb or kg. (4) AAA bateries included. Auto turn on with sense technology. Auto off after 30 seconds at Zero or 35 seconds after weighing data is removed. One year Warranty.

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| 520BW White | 396 x 0.2 lb<br>180kg x 0.1kg | 12” x 12 x 1” | 4 lb | 6266 | $ 60.00 |
| 520BP Pink | 396 x 0.2 lb<br>180kg x 0.1kg | 12” x 12 x 1” | 4 lb | 6267 | 60.00 |

Totalcomp

## TM301 Personal Body Scale

Digital scale with 550 lb maximum capacity. Resolution of 0.1 lbs is best in class. LCD weight display with blue LED backlight. LCD BMI bar graph for Slim; Normal; Fat. Height rod with dual measurements, inches and mm's. Indicator has 7 function keys Tare, Zero, Unit, Print, BMI, Lock (hold function), on/off. Platform size 14" x 14" with bubble level for easy adjustment. Painted white steel construction can be assembled in minutes with included Allen wrenches. ABS indicator with rechargeable battery pack 2000mAh Ni-MH and 12VDC, 500mA adapter is included.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| TM301 Body scale | 550 x 0.1 lb | 34 lb | 6325 | $ 719.95 |
| **Service Parts** | | | | |
| Ni-MH battery pack | | 2 lb | 4844 | 55.64 |
| AC adapter 100-240VAC to 12VDC | | 1 lb | 6362 | 34.84 |
| Indicator for TM301 | | 1 lb | 6327 | 172.00 |

**TM301**
**Personal Body Scale**



Totalcomp

## TM302 Precision Health Scale

Painted steel construction. Foot switch for ON/OFF, UNIT in LBS. ABS indicator has LCD display with blue backlight. Bubble level and adjustable feet makes it easy to level in seconds. Platform is 3.1" high. AC adapter 110VAC to 12VDC and 2000mAh Ni-MH battery included.

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| TM302 | 500 x 0.2 lb | 14.5" x 14.5" | 22 lb | 4820 | $ 450.12 |
| **Service Parts** | | | | | |
| TB-M10-SPB-SS foot M10, 2 1/8" dia | | | 1 lb | 7673 | 6.88 |
| Ni-MH battery pack | | | 2 lb | 4844 | 55.64 |
| AC adapter 100-240VAC to 12VDC | | | 1 lb | 6362 | 34.84 |

**TM302**
**Precision Health Scale**

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.

**TM101**
**Baby Scale**

## TM101 Baby Scale

Light weight, digital scale with unique feeding function for weighing before and after baby feeding. Dual capacity 13/33 lbs x 0.005/0.01 lbs. LCD weight display with blue LED backlight. Units of measure lbs/kg. Horizontal measuring rod with dual measurements, inches and mm's. Indicator has 7 function keys Tare, Zero, Unit, Lock (hold function), on/off and two dedicated keys for before and after feeding. Pan size 23.5"L x 9"W. Bubble level for easy adjustment. ABS indicator with rechargeable battery pack; 2000mAh Ni-MH and 12VDC, 500mA. Adapter included.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| TM101 Baby scale | 33 x 0.01 lb | 15 lb | 6299 | $ 441.65 |
| **Service Parts** | | | | |
| Ni-MH battery pack | | 2 lb | 4844 | 55.64 |

**MBS-2010**
**Baby Scale**

## MBS Baby Scale

Low profile design for maximum weighing security. Auto dampening feature ensures accurate readings even when baby is moving. Water resistant construction. Large easy to read wide angle 1" LCD display. Keys for ON/OFF, KG/LB, HOLD. Auto power saving function. Low battery indication. (1) 9V battery (not included) or 120V adapter (included). Base unit 10.8" x 9.8" x 3.4"H. Overall height 6.9"H.

| Part Number | Capacity | Tray | Weight | SKU | List |
|---|---|---|---|---|---|
| MBSCU2 baby | 44 lb x 0.5 oz<br>20 kg x 10 g | 20.5" x 11.75" | 9 lb | 6017 | $ 84.00 |

Totalcomp

## TM501 Portable Wheelchair scale

Painted steel frame with bolted ABS high strength plastic chair. ABS indicator with LCD display. 7 function keys for ON/OFF, ZERO, TARE, BMI, F, UNITS, LB/KG selectable. Body Mass Index (BMI) function with bar graph, just press BMI and enter patient height and weight, display will show BMI value on LCD screen. Arm rests and handles are standard material made for all wheelchair scales. Foldable foot rest, transport wheels (4), back wheels with brakes. Removable cushion and storage bag included. AC adapter 110VAC to 12VDC and 1800mAh Ni-MH rechargeable battery included.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| TM501 | 550 x 0.1 lb | 92 lb | 4826 | $ 1,161.60 |
| **Service Parts** | | | | |
| Ni-MH battery pack | | 2 lb | 4844 | 55.64 |
| 130504300006 indicator M101 | | 4 lb | 4842 | 248.05 |

**TM501 Portable Wheelchair Scale**

**TM501 Portable Wheelchair Scale w/ Indicator**

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

**6550**
**Portable**
**Wheelchair Scale**

DETECTO
A Division of Cardinal Scale Manufacturing Co.

## 6550 Portable Wheelchair Scale

Lightweight digital foldup scale for heavyweight tasks. Used for wheelchairs, straight legged chairs and walk up traffic. Two sloped ramps allow loading from either side. Nonslip rubber mats cover deck and ramps. Will fold up for easy rolling to a new location or to storage. Vertical fold up feature takes up less storage space when not in use. Switchable to either pounds or kilograms. Indicator has easy to read LCD with auto power off, automatic zero, motion detect, weight lock-in. Keypad for ZERO, UNITS, HOLD/RELEASE. Power is from (6) "C" batteries (included). Platform size is 38"L x 36"W . Size 45"L x 10"W x 38"H when closed for storage.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| 6550 | 800 lb x 0.2 lb | 94 lb | 5978 | $ 3,960.00 |
| **Service Parts** | | | | |
| 0067-B044-0A cable, load cell connection | | 1 lb | 5993 | 86.00 |

**6855**
**Portable**
**Personal Scale**

DETECTO
A Division of Cardinal Scale Manufacturing Co.

## 6855 Portable Personal Scale

High capacity portable digital scale. 600 lb capacity. LCD weight display. Indicator has keys for ON/OFF, LB/KG, HOLD/RELEASE, ZERO. Auto power off to save batteries. Hold/release of display. Automatic zero. Motion detection. Non-slip rubber mat for comfort and safety. Painted white with stainless steel handrail. (6) "C' alkaline batteries (included). Platform size 14"W x 18"D

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| 6855 Digital scale | 600 lb x 0.2 lb | 70 lb | 5977 | $ 3,090.00 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.


www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

Totalcomp

## TM701 Portable Handrail Scale

Accurate, fast and versatile. ABS indicator has front and rear LCD display, also settable to blue backlight. Hand rails on 3 sides. Indicator has 7 function keys for: ON/OFF, ZERO, TARE, HOLD, BMI, F, UNITS, LB/KG selectable. Body Mass Index (BMI) function with bar graph, just press BMI and enter patient weight and display will show BMI value on LCD screen live make it convenient for patient to hold rail while weighing. Painted steel construction can be assembled in minutes. Allen wrenches included. Indicator pole is 48" high. Platform size is 23.5" x 23.5". AC adapter 110VAC to 12VDC and 2000mAh Ni-MH battery included.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| TM701 | 550 lb x 0.1 lb | 94 lb | 4860 | $ 1,376.98 |
| **Service Parts** | | | | |
| Ni-MH battery pack | | 2 lb | 4844 | 55.64 |
| 122528096 indicator M301 | | 4 lb | 4836 | 277.09 |

**TM701**
**Portable**
**Handrail Scale**



Totalcomp

## TM503 Ramp Wheelchair Scale

Accurate, fast and versatile. ABS indicator w/ 25mm LCD display and blue backlight. Hand rails on 3 sides. Indicator has 7 function keys for: ON/OFF, ZERO, TARE, HOLD, BMI, F, UNITS, LB/KG selectable. Non slip rubber mat, on and off ramps foldable up to 165 degrees. Handle and wheels for easy transportation around the facility. Live rails make it convenient for patient to hold rail while weighing. Hand rail and indicator pole are foldable for easy storage. Painted steel construction can be assembled in minutes. Allen wrenches included. Indicator pole is 46" high, adjustable indicator angle up to 25 degrees. AC adapter 110VAC to 12VDC and 2000mAh Ni-MH battery included.

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| TM503 | 550 x 0.1 lb | 33" x 33" | 104 lb | 4831 | $ 1,580.26 |
| **Service Parts** | | | | | |
| Ni-MH battery pack | | | 2 lb | 4844 | 55.64 |
| 130504300006 indicator M101 | | | 4 lb | 4842 | 248.05 |

**TM503**
**Portable Wheelchair Scale**

**339**
**Physician Scale**

DETECTO
A Division of Cardinal Scale Manufacturing Co.

## Physician Scale

Pound and kilogram readings on both front and back of the graduated beam. 350 lb capacity and 160 kg capacity. Model 339 has a height rod 30" to 78" and 76cm to 198cm. Model 338 has both a height rod and wheels for easy transport. Platform size 10.5" x 14.5". Overall size 10.5"W x 14.5"D x 59"H.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| 337 Physician | 350 lb x 0.25 lb | 34 lb | 5974 | $ 440.00 |
| 338 Physician w/wheels | 350 lb x 0.25 lb | 39 lb | 5975 | 550.00 |
| 339 Physician w/rod | 350 lb x 0.25 lb | 37 lb | 5976 | 450.00 |

**400KL**
**Physician Beam Scale**

Health o meter® Professional

## 400 Physician Scale

Portable physician scale. Rotating poise bars for dual reading of pounds and kilograms. Rugged zinc die cast beam construction with copper, nickel, chrome plating. Beam graduations are engraved in die casting, paint filled with baked enamel finish. Maximum strength unitized steel base. Precision heavy duty unitized steel lever system with heat treated pivots and vee bearings. Vacuum formed ABS high impact plastic platform cover. Model 402KL has measuring rod 24" to 84" and includes 100 lb and 40kg counterweights to increase capacity to 450 lbs and 200kg. Platform size 10.4" x 14" x 3.4"H. Overall size 18-3/8" x 20-1/4" x 57-3/4"H.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| 400KL Physician scale | 350 x 0.25 lb<br>160kg x 100g | 37 lb | 907 | $ 340.00 |
| 402KL Scale w/measuring rod | 450 x 0.25 lb<br>200kg x 100g | 40 lb | 4324 | 363.00 |
| **Option for 400KL only** | | | | |
| 55070 counterweight to increase capacity to 450 lb | | 1 lb | 1826 | 87.70 |
| 500KLROD height rod for 500KL | | 2.29 lb | 1838 | 64.00 |
| **Service Parts for electronic scales** | | | | |
| ADPT31 AC adapter 120VAC | | 0.24 lb | 1840 | 80.58 |

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

doran

## DS2100 Mechanical Physician Scale

Fast and easy to obtain the weight and height of a patient. Slide the poises on the weighbeam to obtain the weight. Scale can be converted from lb to kg by twisting the weighbeam. Powder coated painted steel construction. Overall 10.5"W x 22"L x 58"H. Platform size is 10.5" x 14.5" with a removable slip resistant cover.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| DS2100 | 450 lb x 0.25 lb | 42 lb | 781 | $ 308.00 |

**DS2100 Mechanical Physician Scale**

**DS5250**
**Physician Scale**

doran

## DS5250 Eye Level Physician Scale

Digital display at eye level makes this the fastest and easiest way to weigh a patient. Display is 1.25” high LED. Units are lb, kg and Units lock feature. Controls for Zero, Reweigh, Units, BMI. Height rod adjustment from 2’ 0”(61cm) to 6’ 6.7”(200cm). Battery operated 5,500 weighments per charge. Internal rechargeable battery uses the USB port to any wall mount charger and be fully charged in six hours. Platform size 14”W x 18”D. Overall size 14”W x 20.5”D x 49.75”H.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| DS5250 Physician | 600 lb x 0.2 lb | 22.05 lb | 782 | $ 476.00 |


www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp®
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

TRANSCELL TECHNOLOGY, INC.

## SPS Postal Rate Computing Scale

Postal rate computing scale. Rates include: 1st Class/Priority mail, Express Mail, Canada letter Airmail, Mexico letter airmail, Other International letter Air mail. Keys for ZERO, 1st, Express, Canada, Mexico, International. Liquid crystal display(LCD). Auto shut off after 5 minutes. AC adapter included 120 VAC, 50/60 Hz, 9 VDC, 100ma. 9.2" x 12.4" x 2.9" H
NTEP Legal for Trade 97-088 (SPS-30)
NTEP Legal for Trade 10-015 (SPS-70DL)

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| SPS-30 | 0-4 lb x 0.1 oz<br>4-30 lb x 0.5 oz | 8.9" x 8.3" | 12 lb | 220 | $ 369.00 |
| SPS-70DL | 0-4 lb x 0.1 oz | 10" x 9" | 15 lb | 3311 | 1,125.00 |

**SPS-30**
**Postal Computing Scale**

**SPS-70DL**
**Postal Computing Scale**





13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

Totalcomp
Scales & Balances

www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

SJX323N/E
Jewelry Balance

SJX622N/E
Jewelry Balance

SJX6201N/E
Jewelry Balance

OHAUS®

## SJX Jewelry Balance

Legal for Trade portable jewelry balances, Class II and Class III certified Carat and Gold balances. For jewelry, precious metals and gemstones. Superior overload protection, large backlit high contrast LCD display, fast stabilization time, multiple weighing units, stainless steel pan, ABS housing, adjustable feet and level bubble. Application modes include weighing, parts counting, display hold, automatic sample recalibration. Integral weigh below hook. AC adapter (included) or 4 AA batteries (not included). USB and RS232 output option.
NTEP Legal for Trade 16-015 II & III

| Part Number | Class | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|---|
| SJX323N/E | II | 320 x 0.01 ct | 3.7" dia | 3.3 lb | 8332 | $ 1,036.00 |
| SJX622N/E | III | 620 x 0.1 g | 4.7" dia | 3.3 lb | 8333 | 1,297.00 |
| SJX1502N/E | II | 1,500 x 0.01 g | 6.7" x 5.5" | 3.3 lb | 8334 | 1,507.00 |
| SJX6201N/E | III | 6,200 x 1 g | 6.7" x 5.5" | 3.3 lb | 8335 | 1,330.00 |
| **Options** | | | | | | |
| 80252042 CBM-910 Dot matrix printer | | | | 2 lb | 7426 | 395.00 |
| 83032107 RS232 interface w/ cable scout | | | | 2 lb | 6162 | 262.00 |
| 83032108 USB interface w/ cable | | | | 1 lb | 6163 | 262.00 |
| 80251930 Adapter for Scout Pro | | | | 1 lb | 7425 | 64.00 |
| 80251934 Adapter | | | | 1 lb | 7433 | 64.00 |
| 30268986 Ethernet cable | | | | 1 lb | 6357 | 284.00 |

YA
Gold Series

OHAUS®

## YA Gold Series

The ultimate in portability. Durable, high quality answer to precision weighing. Perfect for weighing gold and other fine jewelry. Bright blue backlit display. Hinged draftshield cover. SofTouch outer case. Stainless weighing pan.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| YA102 | 100 g x 0.01 g | 2 lb | 6412 | $ 171.00 |
| YA302 | 300 g x 0.05 g | 2 lb | 6413 | 149.00 |
| YA501 | 500 g x 0.1 g | 2 lb | 6414 | 107.00 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.


www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

OHAUS®

## JS Sapphire Jewelry Scale

Based on the successful Scout II. This model is made for jewelers. Easy to use two button operation and a large, high contrast LCD display. With jewelry weighing modes that include g, ct, oz t , dwt and grains, jewelers have the versatility that is needed for appraisals, bench, showcase and inventory applications. Stainless steel pan. 2 Year warranty. 100-120 VAC adapter, 6.75"W x 8.25"D x 2.4"H.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| JS10 | 50 ct x 0.01 ct<br>10g x 0.002 g | 3"dia | 5 lb | 6515 | $ 295.00 |

**JS10 Sapphire Jewelry Balance**

aczel
Solution Simplified

## CY603K Carat Balance

High contrast backlit LCD display. Stainless steel weighing pan
Units: mg, g, oz, dwt, tola, mommies, baht, grain, mesghal, ozt, Hong Kong taels, Singapore taels, Taiwan taels
Applications: Gold and silver weighing in carats, Check weighing, Piece counting, static, totalization, % weighing, below weighing hook & density
CY603KC has built in calibration. CY603K uses external calibration.
100-240 VAC power adapter. RS232 output. 342.5mmW x 212mmD x 271mmH.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| CY603K | 600ct x 0.001ct | 90mm dia | 15 lb | 4299 | $ 950.00 |
| CY603KC | 600ct x 0.001ct | 90mm dia | 15 lb | 4300 | 1,070.00 |

**CY603K Jewelry Balance**

## Totalcomp

### TPB Pallet Truck Scale

**TPB**
**Pallet Truck Scale**

Fast and easy to use. The TPB is great for instant weighing anywhere in your plant. Digital weight indicator programs include accumulation and unit conversion. As soon as your pallet is raised the display will show you the weight. 0.8" white backlit LCD display with 6 function keys: M+, G/N, TARE, ZERO, ON/OFF. Weighing units for: lb/kg. Rechargeable battery provides up to 30 hours of continous use. AC adapter is also included for charging. Fork dimensions: 47" long, 27" wide, 3.3" high.
FOB Fair Lawn NJ

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| TPB-688mm Pallet scale | 5,000 x 1 lb | 350 lb | 2384 | $ 2,451.46 |
| **Service Parts** | | | | |
| TPB pallet scale indicator | | 3 lb | 2351 | 337.59 |
| RW indicator for TPR | | 2 lb | 2363 | 331.06 |
| Main board for RW | | 1 lb | 3764 | 327.95 |
| GH645 Battery rechargeable lead acid for TPR | | 4 lb | 6114 | 35.09 |
| Load cell for TPR/TPB | | 2 lb | 2400 | 196.99 |
| Pump assembly for TPR/TPB | | 20 lb | 4552 | 669.10 |

## Intercomp

### PW800 Pallet Weigh Truck Scale

**PW800**
**Truck Scale**

Service parts only for PW800 pallet weigh scale.

| Part Number | Weight | SKU | List |
|---|---|---|---|
| **Service Parts** | | | |
| 330111 Battery pack (3) D cell rechargeable | 2 lb | 2671 | 139.00 |

Replacement Load Cells: Use any of the following models
65023, TSB, 5123, 3411, DSB, GSB, NSB, BSA, PA6140

## CAS CORPORATION

### CPS Pallet Truck Scale

**CPS-2**
**Truck Scale**

The convenience of a scale in a pallet truck. It is fast and easy to use. Digital weight indicator is a CAS Model CI-2001B with a 6V rechargeable battery. Large easy to read large 1" LCD display. Function keys for ZERO, TARE, GROSS/NET, lb/kg, PRINT, ON, OFF. Fork dimensions: 47.2" long, 27.8" wide, 3.3" high.
FOB East Rutherford NJ

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| CPS-1 Pallet truck scale * | 3,000 x 1 lb | 410 lb | 6039 | $ 3,395.00 |
| CPS-2 Pallet truck scale | 5,000 x 2 lb | 410 lb | 6040 | 3,395.00 |
| *NTEP Legal for Trade 09-003 III 5,000 div | | | | |
| **Service Parts** | | | | |
| WCP1 cable, battery charger CPS | | 1 lb | 6027 | 36.00 |
| ZCP2 battery charger w/cable CPS | | 4 lb | 6037 | 306.00 |
| KCP1 keypad for CPS | | 1 lb | 6050 | 13.50 |
| RCP1 printer for CPS | | 2 lb | 6051 | 363.00 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287



13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

LTS SCALE

## LTEF Lift Truck Scale

Carriage size: Standard Class II 16” high x 36” wide. Capacity 5,000 lb with 1 lb divisions. Indicator is model DR2100A, dual line, 32 character LCD display with backlight, 0.5” character size. 12 VDC to 48 VDC power is required. Rugged metal enclosure, dust and water resistant. 8.25”L x 3.19”W x 6.69”H. Numeric keypad, APW entry, ID entry, Accumulation register. Universal mounting bracket. Standard coiled load cell cable 15 ft from indicator to lift. FOB Twinsburg, OH

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| LTEF-16 Class II Lift truck scale | 5,000 x 1 lb | 400 lb | 2744 | $6,819.00 |

Other models and capacities are available. Please call for a price quote.

| Service Part | | | | |
|---|---|---|---|---|
| SA-CA-HR-NON-NTEP-5pin-ER lift truck cable, 5 pin conn | | 2 lb | 2748 | 564.84 |

**LTEF-16 Class II Lift Truck Scale**

**DR2100A Indicator Lift Truck Scale**

**Fork lift**

**Coil lift**

**Chute lift**

**Tilt lift**





13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

Totalcomp
Scales & Balances

www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

SW-8.8K Race Car System

SW-8.8K Deluxe Race Car System

PT20 CPU Wireless Indicator

RFX Handheld Wireless Indicator

## SW Race Car Weigh System

Weighing is easily done by jacking up the car. Insert the scale under wheels. Lower car to weigh. Accuracy is 1/10 of 1%.

**SW** system includes: (4) light duty weigh pads w/ cables, (1) weight indicator, (1) battery recharger, (1) instruction manual. Indicator display is 2 line, 16 characters LCD display. Pushbuttons for ZERO, ON, OFF, PRINT/CONTRAST.

**SW Deluxe** system includes: (4) heavy duty weigh pads w/cables, (1) weight indicator and printer mounted in a waterproof carrying case, (1) battery recharger, (1) instruction manual. Indicator display is 4 line, 20 characters LCD display. Pushbuttons for ZERO, LB/KG, TEST, LIGHT, PRINT, HELP, SET TIME/DATE, ON, OFF.

**RFX PT20 CPU** system includes: CPU, waterproof case, printer, power supply. 15 digit, backlight LCD display. USB/RS232 output. Pushbuttons for SET LATITUDE/ALTITUDE CORRECTIONS, VEHICLE/USER INFORMATION, TIME/DATE STAMP, CONTINUOUS PRINTING, CALIBRATE, ON/OFF, ZERO, ON-DEMAND PRINTING, TARE, PEAK, LB/KG, SET ALARM/TARE/ARM.

**RFX Indicator:** Compatible with LP600, PT300, AX900, CS3000, SW and CW250 scale systems. 4 digit LCD backlight display. Capacity to interface up to 12 scales. 300 ft line of site. Up to 40 hours continuous use before recharge. Standard (AA) batteries. Read only mode. USB/RS232 output. Set latitude/altitude corrections. Pushbuttons for CONTINUOUS PRINTING, CALIBRATE, ON/OFF, ZERO, ON-DEMAND PRINTING, TARE, PEAK, LB/KG. Screens for: Individual Weight, Gross/NET/Tare, Axle Group, Accumulative Total, Center of Balance, Tare. Includes Indicator, rechargeable batteries, battery charger, case.

All indicators are powered by (6) internal “AA” NiCad batteries, except for PT20 CPU which uses “D” cell batteries, which are included.
All indicators will show a minimum of your choice of total weight, left or right side, front or back, or any wheel, also percent by wheel.

Deluxe weighing pads are 35 lb. SW Deluxe indicator case is 17”W x 11”D x 7”H, 10 lb.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| SW-8.8K Race car system | 8,800 x 1 lb | 145 lb | 4846 | $ 4,995.00 |
| SW-8.8K Deluxe car system | 8,800 x 1 lb | 155 lb | 4848 | 7,495.00 |
| SW-20K Deluxe car system | 20,000 x 1 lb | 165 lb | 1958 | 10,995.00 |
| **Options** | | | | |
| 100056 System carrying case | | 39 lb | 1962 | 895.00 |
| 100330 Ramp (4) 15” x 15” Snap in or SW Deluxe | | 66 lb | 4849 | 950.00 |
| 100417-4 Ramp (4) 15” x 36” x 4” | | 66 lb | 4850 | 1,995.00 |
| PT20 CPU Wireless indicator, battery operated Includes tape printer. Prints axle, axle group, total weight T&D, etc. | | 20 lb | 3698 | 4,295.00 |
| RFX Handheld wireless indicator | | 4 lb | 6177 | 995.00 |
| **Service Parts** | | | | |
| 603070 load cell | 700 kg | 4 lb | 6392 | 340.00 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.


www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

CAS CORPORATION

## RW-S/L Road Weigher Platform & Indicator

Wheel weigher scale made of rugged cast aluminum. Display is built in 1" LCD w/back light. Used for car, truck and custom applications. Can be used for any mobile weight inspection. Scales are linkable for multi-axle weighing. Up to 6 scales can be linked together. 1% accuracy. Single and double width platforms are available. Each scale will display the individual weight and total weight by pressing the LOCAL/TOTAL button. Battery operated using (12) AA rechargeable or dry cell batteries.Each scale has (2) battery sticks with (6) AA cells in each. 20 hours continuous use before recharging. Rechargeable batteries are included. Also includes a 120 VAC to 12 VDC charger. NTEP Legal for Trade 03-047

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| **12.2"W x 13.4" Platform** overall size 21.1"L x 18"W x 2.4"H | | | | |
| RW-5S | 10,000 x 5 lb | 66 lb | 4714 | $ 1,855.00 |
| RW-05S NTEP | 10,000 x 50 lb | 66 lb | 5383 | 1,966.00 |
| RW-10S | 20,000 x 10 lb | 66 lb | 4715 | 1,966.00 |
| RW-10S NTEP | 20,000 x 50 lb | 66 lb | 5384 | 1,966.00 |
| **24.6"W x 13.4" Platform** overall size 22.3"L x 28.3"W x 2.4"H | | | | |
| RW-5L | 10,000 x 5 lb | 102 lb | 4716 | 2,375.00 |
| RW-05L NTEP | 10,000 x 50 lb | 102 lb | 5385 | 2,518.00 |
| RW-10L | 20,000 x 10 lb | 102 lb | 4717 | 2,518.00 |
| RW-10L NTEP | 20,000 x 50 lb | 102 lb | 5386 | 2,518.00 |
| **Options** | | | | |
| 2 scale totalizer cable RW-S/L series | | 7 lb | 4718 | 95.00 |
| 4 scale totalizer cable RW-S/L series | | 14 lb | 4719 | 285.00 |
| 6 scale totalizer cable RW-S/L series | | 21 lb | 4720 | 475.00 |
| **Service Parts** | | | | |
| Charger adapter 120VAC to 12VDC | | 3 lb | 4782 | 55.00 |
| WRW6 cable 18" w/female connector to RW | | 0.19 lb | 4783 | 35.00 |
| YRW2 (2) batter sticks (6)AA each | | 3 lb | 5331 | 89.00 |

**RW-S**
**Platform/Indicator**

**RW-L**
**Platform/Indicator**



Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

CAS CORPORATION

**RW-2601P**
**Indicator**

## RW-2601P Road Weigher Indicator only

This indicator will connect up to 6 scales simultaneously. Completely self contained portable unit. Will print weight and time & date with built in high speed dot matrix receipt printer. RS232 serial port to connect to a PC or remote display. 10 vehicle number memories. Large easy to read LCD display with back light. Display individual weight of each scale with printed total weight. Totalizer cable included with each scale. Rechargeable battery pack is built in. Charger/adapter 120VAC is included.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| RW-2601P multi platform indicator | | 27 lb | 4723 | $ 2,295.00 |
| **Service Parts** | | | | |
| Charger adapter 120VAC to 12VDC | | 3 lb | 4784 | 73.40 |





www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287



13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

Intercomp
advanced weighing technology ... by any measure

## LP600 Wheel Load Scale

Low profile, light weight all aluminum, digital, self contained, high capacity wheel load scale. 1% accuracy. Display units are either kg or lb depending on model. Battery charging cable, connectors and transformer 120 VAC to 12 VDC is included with orders for 2, 4 or 6 scales. Includes (4) Nicad batteries per scale. 300 hours continuous use before recharge. Low power 1" LCD display is easy to read in daylight. RS232, RS485 output to printers or remote displays. Separate switches for ON and OFF. ZERO switch will set zero. Platform 22.4" x 15". Overall 30" x 16" x 1.5"H. 44 lb.
NTEP Legal for Trade Class IV for LP600-20Kx50

**RFX Indicator:** Compatible with LP600, PT300, AX900, CS3000, SW and CW250 scale systems. 4 digit LCD backlight display. Capacity to interface up to 12 scales. 300 ft line of site. Up to 40 hours continuous use before recharge. Standard (AA) batteries. Read only mode. USB/RS232 output. Set latitude/altitude corrections. Pushbuttons for CONTINUOUS PRINTING, CALIBRATE, ON/OFF, ZERO, ON-DEMAND PRINTING, TARE, PEAK, LB/KG. Screens for: Individual Weight, Gross/NET/Tare, Axle Group, Accumulative Total, Center of Balance, Tare. Includes Indicator, rechargeable batteries, battery charger, case.
NTEP Legal for Trade 00-091

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| **Pounds** | | | | |
| LP600-30Kx50 | 30,000 x 50 lb | 49 lb | 6483 | $ 4,495.00 |
| LP600-20Kx20 | 20,000 x 20 lb | 45 lb | 4822 | 3,495.00 |
| LP600-20Kx10 | 20,000 x 10 lb | 45 lb | 4823 | 3,645.00 |
| LP600-10Kx5 | 10,000 x 5 lb | 45 lb | 4824 | 3,645.00 |
| LP600-5Kx5 | 5,000 x 5 lb | 45 lb | 4825 | 3,495.00 |
| **Options** | | | | |
| 101025 2 Scale carrying case for LP600 | | 40 lb | 4827 | 1,595.00 |
| 101039 4 Scale carrying case for LP600 | | 60 lb | 4828 | 1,795.00 |
| 101044 6 Scale carrying case for LP600 | | 90 lb | 4829 | 2,595.00 |
| 170118 Dummy pad for LP600 | | 45 lb | 4830 | 599.00 |
| 101221 PT20 CPU Wireless indicator, battery operated Includes tape printer. Prints axle, axle group, total weight T&D, etc. | | 20 lb | 3698 | 4,295.00 |
| RFX Handheld wireless indicator | | 4 lb | 6177 | 995.00 |
| **Service Parts** | | | | |
| 330010 Battery pack (6) AA NiCad stick, old style | | 1 lb | 1960 | 49.00 |
| 100480 120V charging cable (1) scale w/ transformer | | 1 lb | 1508 | 160.00 |

**LP600**
**Wheel Load Scale**

**RFX Indicator**

**PT20 CPU**
**Wireless Indicator**

Wheeload

**PT300DW**
**Wheel Load Scale**

**100050**
**2 Scale carrying case**

**100051**
**4 Scale carrying case**

**000196-T**
**for PT300**

## PT300DW Wheel Load Scale

Heavy duty, wireless, all aluminum electronic self contained wheel load scale. 1% accuracy. Includes (4) rechargeable Nicad batteries per scale. Has solar charging panels that virtually eliminate the need to manually recharge batteries between uses. LOCAL/TOTAL switch will show the individual scale weight or the total of all scales in the system. ZERO switch set the system to read zero. PRINT/ACCUMULATE button will print and also accumulate weight to total function. ON/OFF switch will control power. 22" x 26" x 3"H, 60 lb.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| **14" x 22" platform** | | | | |
| PT300DW-55 | 5,000 x 5 lb | 60 lb | 2921 | $ 2,295.00 |
| PT300DW-5 | 10,000 x 5 lb | 60 lb | 1660 | 2,445.00 |
| PT300DW-10 | 20,000 x 10 lb | 60 lb | 1659 | 2,445.00 |
| PT300DW-20 | 20,000 x 20 lb | 60 lb | 1658 | 2,295.00 |
| PT300DW-30 | 30,000 x 50 lb | 60 lb | 2922 | 3,295.00 |
| PT300DW-40 | 40,000 x 100 lb | 60 lb | 2923 | 3,795.00 |
| **Options** | | | | |
| 100050 2 Scale carrying case for PT300DW | | 40 lb | 1677 | 1,195.00 |
| 100051 4 Scale carrying case for PT300DW | | 60 lb | 1678 | 2,095.00 |
| 100052 6 Scale carrying case for PT300DW | | 90 lb | 1679 | 2,495.00 |
| 100480 Charger & cable (1) scale | | 2 lb | 1508 | 160.00 |
| 100492 Charger & cable (2) scales | | 2 lb | 1509 | 254.00 |
| 100493 Charger & cable (4) scales | | 2 lb | 1510 | 424.00 |
| 100494 Charger & cable (6) scales | | 2 lb | 1004 | 594.00 |
| **Service Parts** | | | | |
| 250327 Keypad for PT300 (8) button | | 1 lb | 6185 | 133.49 |
| 240063 LCD display | | 1 lb | 6188 | 49.95 |
| 250409 Keypad PT300 (4) button | | 1 lb | 6199 | 153.49 |
| 810027 Main board PT300 (4) button | | 1 lb | 6200 | 595.00 |
| 330010 battery pack w/(6) AA NiCad batteries | | 1 lb | 1960 | 49.00 |
| 330158 battery pack w/(4) AA NiCad batteries | | 1 lb | 2316 | 39.00 |
| 100490 Totalizer cable for 6 scales(15',25',15',25',15'), old style | | 1 lb | 1519 | 510.00 |

1.3 mv/v, 1000/1000 ohms, 3 ft 4 cond cable, anodized aluminum, IP67.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| 000196-T Load cell, blue cable | 10,000 lb | 12 lb | 5559 | $ 432.36 |
| New style 1.3 mv/v | | | | |



Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

Intercomp
advanced weighing technology ... by any measure

## PT300 Wheel Load Scale

Heavy duty, wireless, all aluminum electronic self contained wheel load scale. 1% accuracy. Includes (4) rechargeable Nicad batteries per scale. Has solar charging panels that virtually eliminate the need to manually recharge batteries between uses. LOCAL/TOTAL switch will show the individual scale weight or the total of all scales in the system. ZERO switch set the system to read zero. PRINT/ACCUMULATE button will print and also accumulate weight to total function. ON/OFF switch will control power.
16" x 20" x 3"H, 42 lb.
NTEP Legal for Trade 90-106 for PT300-50

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| **12" x 12" platform** | | | | |
| PT300-20 | 20,000 x 20 lb | 42 lb | 1413 | $ 1,695.00 |
| PT300-10 | 20,000 x 10 lb | 42 lb | 1414 | 1,935.00 |
| PT300-10 (Wired) | 20,000 x 10 lb | 42 lb | 2151 | 1,495.00 |
| PT300-50 | 20,000 x 50 lb | 42 lb | 1412 | 1,695.00 |
| PT300-5 | 10,000 x 5 lb | 42 lb | 1415 | 1,845.00 |
| PT300-55 | 5,000 x 5 lb | 42 lb | 4044 | 1,645.00 |
| **Options** | | | | |
| 100047 2 Scale carrying case for PT300 | | 30 lb | 1417 | 1,095.00 |
| 100048 4 Scale carrying case for PT300 | | 40 lb | 1418 | 1,395.00 |
| 100049 6 Scale carrying case for PT300 | | 60 lb | 1419 | 1,495.00 |
| 100088 PT300-DP Dummy pad 12" x 20" x 3"H | | 30 lb | 1296 | 645.00 |
| RFX Handheld wireless Indicator | | 4 lb | 6177 | 995.00 |
| 100480 Charger & cable (1) scale | | 2 lb | 1508 | 160.00 |
| 100492 Charger & cable (2) scales | | 2 lb | 1509 | 254.00 |
| 100493 Charger & cable (4) scales | | 2 lb | 1510 | 424.00 |
| 100494 Charger & cable (6) scales | | 2 lb | 1004 | 594.00 |
| PT20 CPU wireless indicator, battery operated, portable. Includes built in tape printer. Prints axle weight, axle group, total weight, time & date. Includes cables w/connectors. | | 20 lb | 3698 | 4,295.00 |
| **Service Parts** | | | | |
| 250327 Keypad for PT300 | | 1 lb | 6185 | 133.49 |
| 240063 LCD display | | 1 lb | 6188 | 49.95 |
| 250409 Keypad PT300 (4) button | | 1 lb | 6199 | 153.49 |
| 810027 Main board PT300 (4) button | | 1 lb | 6200 | 595.00 |
| 330010 battery pack w/(6) AA NiCad batteries | | 1 lb | 1960 | 49.00 |
| 330158 battery pack w/ (4)AA NiCad batteries | | 1 lb | 2316 | 39.00 |
| 100490 Totalizer cable for 6 scales(15',25',15',25',15'), old style | | 1 lb | 1519 | 510.00 |

**PT300**
**Wheel Load Scale**

**PT300**
**Wireless Wheel Load**
**Scale System**

**100088**
**PT300-DP**
**Dummy Pad**

1.3 mv/v, 1000/1000 ohms, 3 ft 4 cond cable, anodized aluminum, IP67.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| 000196-T Load cell, blue cable | 10,000 lb | 12 lb | 5559 | $ 432.36 |
| New style 1.3 mv/v | | | | |

**000196-T**
**for PT300**



Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

**235-6S**
**Hanging Scale**

Brecknell

## 235 Hanging Scale

Shatterproof ABS case. Lightweight and corrosion resistant. Maintenance free. High strength stainless steel fittings.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| 235-6S 22 lb | 22 lb x 0.2 lb | 10 lb | 4397 | $ 134.00 |

**820**
**Hanging dial scale**

Penn Scale Manufacturing Company Inc.
Scales and Scoops

## 820 Hanging Dial Scale

The 820 and 1030 dial scales are made to strict standards and designed to pass individual state's Weights and Measure inspections. They are sold as approximating scales only.
The 820 scale is modern both in construction and appearance. Designed to withstand hard usage and will continue to perform with accuracy. This scale has an 8" dial and has 3 different scoops. Bronze bearings and springs are made of alloys for precision weighing. Heat treated precision ground pinions assure repeatable and accurate weight readings.
The 1030 scale has a 10" dial. All steel construction makes this scale rugged and accurate. Has a deep pan and single face. Ball bearings make for smooth operation and guarantee long wear and trouble free service.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| 820PG w/ pan, glass | 20 lb x 1/2 oz | 10 lb | 5326 | $ 264.38 |
| 1030P w/ deep pan | 30 lb x 1 oz | 15 lb | 5330 | 538.00 |
| **Service Parts** | | | | |
| 820V Vegetable scoop only | 20 lb | 4 lb | 5339 | 46.67 |

| Scoop | Construction | Dimensions |
|---|---|---|
| 820PG | Aluminum | 12" x 3" |
| 1030P | Galvanized steel | 20" x 14" x 7" |

**820V**
**Vegetable scoop**

**820P**
**Hanging pan**

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

## IN-50 Chatillon Hanging Scale

Heavy gauge solid brass construction. Precision steel springs for outstanding reliability, including salt water appications. Ideal for weighing fish, testing your line or setting your drag. Avoirdupois and metric graduations that are deeply embossed for easy reading. Zero/tare knob is standard. Fixed holding loop and large open hook included. 5 year exclusive warranty.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| IN-50 w/ MRP | 50 lb x 8oz | 2 lb | 2032 | $ 199.00 |

**IN-50**
**Hanging Scale**

## 0720-T Chatillon Hanging Scale

Mechanical hanging scale is corrosion resistant steel with excellent performance. With 7 inch glass covered dial head. H44 Class III legal for trade. Capacity is reached in 2 pointer revolutions. 5 year warranty.
NTEP Legal for Trade 86-030

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| 0720-T Head only | 20 lb x 1/2 oz | 5 lb | 2054 | $ 640.00 |
| **Options** | | | | |
| CG scoop and suspension chain, galvanized | | 1.53 lb | 2055 | 105.00 |

**0720-T**
**Hanging Scale head w/optional CG scoop**



Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

**THS**
**Digital Hanging Scale**

## THS Digital Hanging Scale

Safety overload up to 150%. 16.5mm digits high LCD display. Hanging loop and S-hook. Selectable weighing unit (kg/lb). Function keys for ZERO, TARE, CHANGE WEIGHING UNIT, HOLD. (3) AA batteries included. 12"L x 3"W x 2"D

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| THS-44 | 44 x 0.02 lb | 1 lb | 3481 | $ 204.49 |
| THS-88 | 88 x 0.05 lb | 1 lb | 3482 | 204.49 |
| THS-220 | 220 x 0.1 lb | 1 lb | 3483 | 204.49 |
| THS-440 | 440 x 0.2 lb | 1 lb | 3484 | 204.49 |

**Electro Samson**
**Hand held**
**hanging scale**

## Electro Samson Hand Held Hanging Scale

Hand held scale. Angled LCD display for easy reading. Displayed units are kg, lb-oz and decimal lb. Function keys for ON/ZERO, OFF, HOLD, UNIT. Auto shut off after 2 minutes inactivity. Hold feature will hold the highest weight until reset. Dimensions 340mm x 95mm x 55mm. 9 volt alkaline battery not included.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| Electro Samson 22 lb | 22 lb x 0.02 lb | 3 lb | 4378 | $ 153.00 |
| Electro Samson 55 lb | 55 lb x 0.05 lb | 3 lb | 4379 | 177.00 |
| Electro Samson 99 lb | 99 lb x 0.1 lb | 3 lb | 4363 | 202.00 |

**DCS-CD**
**Hanging Scale**

## DCS-CD Hanging Scale

Aluminum die cast case hanging scale. Easy to read large LCD display with backlight. Battery operated (3) AA batteries, included. Battery life is 30 hours. Hook and shackle included. Remote control included (2)AA batteries, included. Soft touch tactile keyboard. Weighing units LB/KG.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| DCS-CD2000 | 2,000 x 1 lb | 4 lb | 2056 | $ 311.25 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.


www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

## CS200 Hanging Scale

High accuracy, compact digital hanging scale uses a 12 bit A/D converter for accuracy +/- 0.1% of applied load. Weatherproof ABS plastic case assures maximum protection against moisture, dust and rough usage. High visibility 1/2" high LCD digital readout provides easy reading of weights. Membrane push button switches allow simple trouble free operation. Power is supplied by (1) 9 volt alkaline battery (not included). Peak hold, stainless steel hooks. Function keys for ZERO, lb/kg, ON/OFF. Overall case size 3.75"W x 2"D x 6"H.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| CS200-50 | 50 x 0.02 lb | 2 lb | 3868 | $ 595.00 |
| CS200-100 | 100 x 0.05 lb | 2 lb | 3869 | 595.00 |
| CS200-250 | 250 x 0.1 lb | 3 lb | 3870 | 595.00 |
| CS200-500 | 500 x 0.2 lb | 3 lb | 3032 | 595.00 |

**CS200**
**Hanging Scale**

## MSI Hanging Scale

Service part only.s.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| **Service Parts** | | | | |
| 500703-0013 MSI load cell 120 lb | | 5 lb | 460 | $ 1,687.00 |

**MSI**
**Load Cell**

## SHS Crane Scale

The SHS crane scale offers a strong, safe solution for weighing heavy, suspended loads such as commercial fishing nets, crates and machinery in industrial shipping and production operations. Bright LED display for easy viewing in most environments. Ruggedly constructed, the SHS has a weight capacity up to 300kg. A remote control allows safe and simple operation of the scale from a distance, including outdoors. The hold function retains the value on the display after the item is removed from the scale, allowing time for the operator to record the weight. Programmable auto power-off to save energy. Rechargeable battery included for operation almost anywhere.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| SHS100a | 100 x 0.02 lb | 4 lb | 1683 | $ 680.00 |
| SHS300a | 300 x 0.05 lb | 4 lb | 1684 | 705.00 |
| SHS600a | 600 x 0.1 lb | 4 lb | 1685 | 715.00 |

**SHS**
**Crane Scale**



Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

**CS750**
**Crane Scale**

**Infrared**
**Remote**
**Control**

## CS750 Crane Scale

High accuracy, compact digital hanging scale uses a 20 bit A/D converter for accuracy +/- 0.1% of applied load. Keyboard setup and digital calibration. Includes wireless infrared remote control for ON, Off, Zero, Tare. High visibility 1" high LCD digital readout provides easy reading of weights. Programmable display updates from 1 to 127/sec. Programmable digital filter averaging sample size 1 to 31. Membrane push button switches allow simple trouble free operation. Power is supplied by (6) "D" cell batteries(not included). Efficient micro controller gives up to 1 year of battery life. Auto shut off after 5 minutes without use. Tare up to 100%. Zero up to 100%. Indicator lights for lb/kg. Function keys for ON/OFF, ZERO, BACK LIGHT. Overall case size 8.5"W x 5"D x 4.25"H.
NTEP Legal for Trade 97-135

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| CS750-100 | 100 x 0.05 lb | 8 lb | 2644 | $ 1,145.00 |
| CS750-300 * | 300 x 0.1 lb | 8 lb | 2645 | 1,145.00 |
| CS750-500 * | 500 x 0.2 lb | 8 lb | 2646 | 1,195.00 |
| CS750-1000 * | 1,000 x 0.5 lb | 8 lb | 2647 | 1,195.00 |
| * NTEP | | | | |
| **Options** | | | | |
| 184256 RS232 Serial output | | 1 lb | 2648 | 195.00 |
| **Service Parts** | | | | |
| 360105 Remote Control | | 1 lb | 3714 | 39.00 |
| 250348 keypad 4 button (old) | | 1 lb | 2673 | 133.49 |
| 2505521 keypad 6 button (new) | | 1 lb | 2675 | 133.49 |

**CS1500**
**Crane Scale**

**Infrared**
**Remote**
**Control**

## CS1500 Crane Scale

High accuracy, using a 20 bit A/D converter gives +/-0.1% of applied load. Keyboard setup and digital calibration. Includes wireless infrared remote control for ON, Off, Zero, Tare. All electronics are shock mounted in a weatherproof cast aluminum case which assures maximum protection against moisture, dust and rough usage. High visibility 0.8" high LED digital readout provides easy reading of weights. Programmable display updates from 1 to 127/sec. Programmable digital filter averaging sample size 1 to 31. Recessed push button switches allow simple trouble free operation. Power is supplied by (8) "D" cell batteries(not included). Efficient micro controller gives up to 100 hours of battery life. Auto shut off after 5 minutes without use. Indicator lights for lb/kg. Tare up to 100%. Zero up to 100%. Function keys for TARE, PRINT, lb/kg, ZERO, MODE, SET, ON, OFF. Overall size 9"Wx15"Dx17"H.
NTEP Legal for Trade 97-135

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| CS1500-2000 | 2,000 x 1 lb | 25 lb | 2654 | $ 2,195.00 |
| CS1500-5000 | 5,000 x 2 lb | 47 lb | 2655 | 2,895.00 |
| CS1500-10000 | 10,000 x 5 lb | 47 lb | 2656 | 2,995.00 |
| **Options** | | | | |
| 184507 RS232 Serial output | | 1 lb | 7061 | 49.00 |
| **Service Parts** | | | | |
| 360105 Remote Control | | 1 lb | 3714 | 39.00 |
| 250361 Keysheet | | 0.1 lb | 3788 | 133.49 |
| 000062 load cell 2,000 lb for CS | | 2.22 lb | 3750 | 807.72 |



Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.


www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

CAS CORPORATION

## NC1 Crane Scale

Service parts only

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| **Service Parts** | | | | |
| 7599-NCO-0000 AC adapter | | 1 lb | 5962 | 65.70 |

**NC1**
**Crane Scale**
**w/Remote Control**

CAS CORPORATION

## CCB Crane Scale

Wireless crane scale. 2,000 lb to 20,000 lb capacities. LCD display 1-3/16" high with back light. Swivel Crosby hook. Includes (1) Lithium Polymer (LiPo) battery pack and AC adapter for recharging. Includes infared remote control. ZigBee wireless capabilities. Sealed to IP67. Case dimensions 8.6"W x 10"D x 16" to 20.7"H.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| CCB-1TLF | 2,000 lb x 0.5 lb | 25 lb | 4979 | $ 1,479.00 |
| CCB-3TLF | 5,000 lb x 1 lb | 40 lb | 4980 | 1,585.00 |
| CCB-5TLF | 10,000 lb x 2 lb | 45 lb | 4981 | 1,797.00 |
| CCB-10TLF | 20,000 lb x 5 lb | 70 lb | 4982 | 2,963.00 |
| **Options** | | | | |
| CRD-2300F wireless remore display 5 digits 2.3" H | | 5 lb | 4983 | 495.00 |
| CRD-3000F wireless remore display 5 digits 3" H | | 7 lb | 4984 | 595.00 |
| **Service Parts** | | | | |
| CRC-100 handheld indicator, portable, ZigBee | | 3 lb | 4985 | 385.00 |
| ZCC1 battery pack, lithium polymer 3.7VDC 4,000 ma | | 1 lb | 4986 | 120.00 |

**CCB**
**Crane Scale**
**w/Remote Control**

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

Caston-2
Crane Scale

Remote Control

CAS CORPORATION

## Caston 2 Crane Scale

Crane scale with wireless remote control. Large bright red LED display 1.2" high. Auto span calibration. (2) Ni-Cad rechargeable battery packs and recharger are included. One pack is in the scale and the other is a spare that should be kept fully charged. Typical 72 hours between recharge. Low battery indication. Tare up to 100%. Zero up to 2%. Function keys on both scale housing and remote control for ON, OFF, ZERO, TARE. Full tare subtraction. Dimensions 9.1" W x 14.2" D.

| Part Number | Capacity | Height | Weight | SKU | List |
|---|---|---|---|---|---|
| CAST2-PLUS(1K) | 1,000 lb x 0.5 lb | 13.8" | 49 lb | 2639 | $ 1,426.00 |
| CAST2-PLUS(2K ) | 2,000 lb x 1 lb | 13.8" | 50 lb | 2640 | 1,426.00 |
| CAST2-PLUS(5K ) | 5,000 lb x 2 lb | 16.9" | 62 lb | 2641 | 1,426.00 |
| CAST2-PLUS(10K ) | 10,000 lb x 2 lb | 16.9" | 72 lb | 2470 | 1,585.00 |
| **Service Parts** | | | | | |
| ZC29 battery pack assy | | | 4.54 lb | 248 | 132.00 |
| ZC24 6794-A00-0050 battery, 6 volt, | | | 4 lb | 515 | 72.00 |
| ZC27 battery case assy | | | 2 lb | 259 | 55.00 |
| ZC2A battery charger (Old ZC26) | | | 3 lb | 5267 | 306.00 |
| WC26 battery box cable | | | 1 lb | 371 | 20.00 |
| WC27 battery charger cable | | | 1 lb | 399 | 30.00 |
| HC28 safety latch 2t-5t | | | 1 lb | 327 | 37.85 |
| RC11 Remote control for Caston II | | | 1 lb | 539 | 71.42 |

CAS CORPORATION

## IE Crane Scale

Service parts only for Cas IE crane scale.

| Part Number | Weight | SKU | List |
|---|---|---|---|
| ZIE1 Cas battery for IE crane scale | 3 lb | 7043 | $ 66.00 |
| XIE1Cas adapter 9VDC for IE crane scale | 1.5 lb | 7062 | 55.00 |

CAS CORPORATION

## Caston 3 Crane Scale Bluetooth Capable

Crane scale with wireless remote control. Large bright red LED display, 6 digit 1.5" high. Auto span calibration . (2) Ni-Cad rechargeable battery packs and recharger are included. One pack is in the scale and the other is a spare that should be kept fully charged. 14-24 hours between recharge. Low battery indication. Hold function automatic, manual. Function keys on both scale housing and remote control for ON, OFF, ZERO, TARE, HOLD, BATT. Sealed to NEMA 4 IP65. Dimensions 11" W x 13.1" D.

| Part Number | Capacity | Height | Weight | SKU | List |
|---|---|---|---|---|---|
| CAST3-PLUS(10K) | 10,000 lb x 2 lb | 22.0" | 100 lb | 2685 | $ 2,200.00 |
| CAST3-PLUS(20K) | 20,000 lb x 5 lb | 33.3" | 155 lb | 2686 | 3,493.00 |
| CAST3-PLUS(30K) | 30,000 lb x 10 lb | 35.0" | 161 lb | 1912 | 4,023.00 |
| CAST3-PLUS(40K) | 40,000 lb x 10 lb | 39.0" | 240 lb | 1913 | 4,553.00 |
| CAST3-PLUS(60K) | 60,000 lb x 20 lb | 53.2" | 710 lb | 1819 | 12,503.00 |
| CAST3-PLUS(100K) | 100,000 lb x 20 lb | 73.2" | 1,050 lb | 1723 | 21,513.00 |
| **Options** | | | | | |
| TWN-B Bluetooth portable handheld indicator | | | 2 lb | 1846 | 595.00 |
| THD-BT Bluetooth module fill retrofit kit | | | 2 lb | 1847 | 250.00 |
| **Service Parts** | | | | | |
| 6794-A00-0020 rechargeable battery, 6 volt, VT610 | | | 10 lb | 516 | 85.70 |
| ZC 3C rechargeable battery, 12 volt, VT 1207 | | | 10 lb | 722 | 85.70 |
| HC28 safety latch 2t-5t | | | 1 lb | 327 | 37.85 |
| WC32 battery cable 12V-4 pins | | | 1 lb | 707 | 33.00 |
| ZC3B batery charger 4 pin | | | 1.36 lb | 706 | 306.00 |
| RC33 Remote control for Caston III | | | 1 lb | 540 | 71.42 |

**Caston III**
**Crane Scale w/Remote Control**

**CS Series**
**Electronic Crane Scale w/ Remote**

## CS Series Salter Electronic Crane Scale

Aluminum die-cast case, alloy steel load cell, hook and shackle. 5 digit, 1/2" Bright LED display has adjustable brightness for any environment. Function keys for ON/OFF, TARE, ZERO. Units of measure displays kg or lb. Calculates total weight. Rechargeable battery with AC power adapter. Operates 20 hours between charges. Includes wireless remote control, requires (2) "AA" batteries, puts all scale functions at your fingertips. Distance controls for zero, tare, peak, accumulator and power. Overall size 12"L x 11"W x 7.5"H.

| Part Number | Capacity | KG | Weight | SKU | List |
|---|---|---|---|---|---|
| CS1000 | 1,000 x 0.5 lb | 500 x 0.2 kg | 11 lb | 6060 | $ 832.00 |
| CS2000 | 2,000 x 1 lb | 1,000 x 0.5 kg | 11 lb | 6061 | 901.00 |
| **Service Parts** | | | | | |
| AWT25-500448 battery .6V 5AH CS series | | | 2.1 lb | 6018 | 158.00 |

## MSI Crane Scale

Service parts only for MSI Crane Scale

| Part Number | Weight | SKU | List |
|---|---|---|---|
| 500703-0013 MSI load cell 120 lb | 5 lb | 460 | $ 1,687.00 |

## IHS Crane Scale

The SHS crane scale offers a strong, safe solution for weighing heavy, suspended loads such as commercial fishing nets, crates and machinery in industrial shipping and production operations. Bright LED display for easy viewing in most environments. Ruggedly constructed, the SHS has a weight capacity up to 300kg. A remote control allows safe and simple operation of the scale from a distance, including outdoors. The hold function retains the value on the display after the item is removed from the scale, allowing time for the operator to record the weight. Programmable auto power-off to save energy. Rechargeable battery included for operation almost anywhere.

| Part Number | Capacity | Height | Weight | SKU | List |
|---|---|---|---|---|---|
| IHS2a | 2,000 lb x 0.5 lb | 19” | 43 lb | 1689 | $ 2,095.00 |
| IHS6a | 6,000 lb x 1 lb | 19” | 43 lb | 1690 | 2,250.00 |
| IHS10a | 10,000 lb x 2 lb | 19” | 43 lb | 1691 | 2,570.00 |
| IHS20a | 20,000 lb x 5 lb | 21” | 72 lb | 1692 | 3,715.00 |

**IHS**
**Crane Scale**

## LHS Crane Scale

The SHS crane scale offers a strong, safe solution for weighing heavy, suspended loads such as commercial fishing nets, crates and machinery in industrial shipping and production operations.Bright LED display for easy viewing in most environments Ruggedly constructed, the SHS has a weight capacity up to 300kg .A remote control allows safe and simple operation of the scale from a distance. , including outdoors. The hold function retains the value on the display after the item is removed from the scale, allowing time for the operator to record the weight. Programmable auto power-off to save energy Rechargeable battery included for operation almost anywhere

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| LHS1000a | 1,000 x 0.02 lb | 12 lb | 1686 | $ 1,145.00 |
| LHS3000a | 3,000 x 0.05 lb | 12 lb | 1687 | 1,315.00 |
| LHS4000a | 4,000 x 1 lb | 12 lb | 1688 | 1,625.00 |

**LHS**
**Crane Scale**



Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.

**AP Mechanical Dynamometer**

DILLON

## AP Mechanical Dynamometer

Portable 5” or highly visible 10” dials. Constructed of high strength composite (5”) or rugged cast aluminum (10”) to resist heavy blows. Used for diverse jobs such as stringing utility line, mounting cables for bridges, adjusting tension on guy wires, field testing chain, rope or wire and anything requiring precise force or tension measurement. Offers accurate readings from varying sight lines. Dial is mar and fog resistant. Can cancel preset loads up to 20% of capacity. Remains in position to indicate peak load point after load is removed from instrument. Includes users guide and signed calibration card, Dynamometer, shackles and pins, maximum pointer, zero adjust for tare, molded plastic carrying case on 5” models and calibration certificate traceable to NIST.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| **5” Diameter Dial** | | | | |
| 30006-0019 | 500 x 5 lb | 15 lb | 6864 | $ 1,795.00 |
| 30006-0027 | 1,000 x 10 lb | 15 lb | 6865 | 1,700.00 |
| 30006-0035 | 2,000 x 20 lb | 15 lb | 6866 | 1,700.00 |
| 30006-0043 | 4,000 x 25 lb | 15 lb | 6867 | 1,840.00 |
| 30006-0050 | 5,000 x 50 lb | 15 lb | 6868 | 1,795.00 |
| 30006-0076 | 8,000 x 50 lb | 15 lb | 6870 | 2,010.00 |
| 30006-0084 | 10,000 x 100 lb | 15 lb | 6871 | 1,995.00 |
| 30006-0092 | 15,000 x 100 lb | 15 lb | 6872 | 2,295.00 |
| 30006-0100 | 20,000 x 200 lb | 15 lb | 6873 | 2,245.00 |
| **10” Diameter Dial** | | | | |
| 30007-0026 | 1,000 x 5 lb | 26 lb | 6875 | 2,090.00 |
| 30007-0034 | 2,000 x 10 lb | 26 lb | 6876 | 2,090.00 |
| 30007-0059 | 5,000 x 20 lb | 26 lb | 6878 | 2,185.00 |
| 30007-0083 | 10,000 x 50 lb | 26 lb | 6881 | 2,345.00 |
| 30007-0109 | 20,000 x 100 lb | 26 lb | 6883 | 2,560.00 |
| 30784-0017 | 30,000 x 200 lb | 98 lb | 6884 | 8,835.00 |
| 30784-0033 | 50,000 x 200 lb | 98 lb | 6886 | 8,835.00 |
| **Service parts** | | | | |
| 30079-0045 pointer 10” dial | | 1 lb | 6882 | 112.00 |
| 30246-0043 pointer 5” Dial | | 1 lb | 6896 | 112.00 |

**Quick-Check Tension Meter**

DILLON

## Quick-Check Tension Meter

Portable and rugged. Designed for outdoor use. Quick Check can be placed on cable, measure its tension and removed in under 5 seconds. Easy to red LED display with full text prompts. Easy to read SOFTKEY interface. Tension units of measure: pound-force, kilogram force, Newtons. Built in averaging. Built in temperature sensor with patented automatic tension adjustment. Sheaves with bearings eliminate friction Quick Check can be employed in many industries including tower and stack guy wires, pretensioned cable barriers, bridges, elevators, winch rope, prestressed concrete, fall arrest systems, aircraft cables and utilities. Stores calibration for up to 15 unique wire sizes and types. Uses AA batteries and has long life between changes. Includes carrying case.
10”W x 23”D x 3”H

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| AWT05-508112 | 2,000 x 2 lb | 11 lb | 6930 | $ 3,800.00 |
| AWT05-508111 | 10,000 x 10 lb | 11 lb | 6931 | 3,875.00 |

**Sheave Select** (select at least one)

| | | | | |
|---|---|---|---|---|
| 36309-0085 | Code L | Sheave 3/16” to 1/4” wire dia | 6932 | 470.00 |
| 36309-0044 | Code P | Sheave 3/16” to 1/2” wire dia | 6933 | 340.00 |
| 36309-0010 | Code S | Sheave 1/4” to 3/4” wire dia | 6934 | 340.00 |
| 36309-0101 | Code T | Sheave 1/2” to 1” wire dia | 6894 | 340.00 |

**Calibration Select** (select at least one)

| | | |
|---|---|---|
| First wire calibration is included with each Quick Check | 6935 | no charge |
| Subsequent calibrations | 6936 | 166.00 |

Indicate what wire sizes and types to calibrate
Each wire size is calibrated at 4-5 load points and confirmed by a validation run

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.


www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

DILLON

## ED junior Dynamometer

Aircraft quality aluminum, easy to position, highly mobile instrument with exceptional strength.7:1 factor of safety at all capacities and 5:1 on 25K. The EDjunior's design is a direct response to industries that have wanted an extremely well built instrument that could be relied upon for simple yet critical measurements of weight and force. The 6 digit dot matrix display features 1" high numerals for greater visibility. Provides peak detection as well as sustained load readings. SOFTKEY interface provides direct access to setup and display functions without the typical confusing menu structure. 200% safe overload. Distinctive angle body design further eliminates unnecessary weight and streamlines the unit to help prevent binding. Display update rate is 2 times per second. Peak hold sampling rate is 2 times per second. Designed to NEMA4X/IP55 for continuos exterior job site applications as well as in plant use. Calibration traceable to NIST. Includes carry case, manual, calibration card and (2) C cell batteries. Typical battery life is 200 hours. NEMA 4x/IP55.

| Part Number | Dillon | Capacity | Weight | SKU | List |
|---|---|---|---|---|---|
| EDjr-2.5K | AWT05-506317 | 2,500 x 2 lb | 6 lb | 6912 | $ 2,235.00 |
| EDjr-5K | AWT05-506318 | 5,000 x 5 lb | 10 lb | 6913 | 2,370.00 |
| EDjr-10K | AWT05-506319 | 10,000 x 10 lb | 18 lb | 6914 | 2,595.00 |
| EDjr-25K | AWT05-506320 | 25,000 x 20 lb | 47 lb | 6915 | 3,730 00 |

**EDjunior Dynamometer**

DILLON

## EDxtreme Dynamometer

Constructed of electroless nickel plated aircraft quality alloy steel. Lower capacity models are anodized aircraft quality aluminum. Allows permanent attachment of centering spacers, which eliminates fumbling during high capacity rigging. 5:1 measure of strength and safety is maintained at all capacities. 200% safe overload capacity. Resolution mode is 1 part in 5,000. Wide angle LCD provides improved readability over a wider viewing angle. RS232 or RS485 communication. Display update rate a 2 times per second. Includes certificate of calibration, manual and (2) C cell batteries. Plastic carrying case included for EDx-2.5K to EDx-100K. Higher capacities include rugged plywood storage crate. Instruments with shackles include centering spacers (EDx-50K & up) and shackle storage crate (EDx-50K to EDx-160K). 9" x 4.6" x 1.8" NEMA 3/IP44

| Part Number | Dillon | Capacity | Weight | SKU | List |
|---|---|---|---|---|---|
| EDx-2.5K | AWT05-506312 | 2,500 x 2 lb | 13 lb | 6920 | $ 3,155.00 |
| EDx 5K | AWT05-506313 | 5,000 x 5 lb | 13 lb | 6921 | 3,565.00 |
| EDx-10K | AWT05-506314 | 10,000 x 10 lb | 22 lb | 6922 | 4,100.00 |
| EDx-25K | AWT05-506315 | 25,000 x 20 lb | 46 lb | 6923 | 5,225.00 |
| EDx-50K | AWT05-506316 | 50,000 x 50 lb | 125 lb | 6924 | 6,525.00 |

**EDxtreme Dynamometer**

**TL6000**
**Tension Link**
**Scale w/ RF Antenna**

## TL6000-RF Wireless Tension Link Scale

RF wireless. Aluminum or stainless steel. Cranes, riggers, shipyards, construction sites, surveyors, inspectors and utilities demand cost effective yet technologically advanced solutions for processing, monitoring and controlling overhead loads. +/-0.1% of applied load or +/-1 graduation: whichever is greater, +/- 0.2% or +/- 2 graduations for 25K & higher. Weights are easily viewed with the industry's largest digital 1.2" high LCD readout. The units easy to use membrane switches allow simple, trouble free operation. The TL6000 wireless remote control can communicate with 20 remote tension links simultaneously. The remote can display the weight from a specific tension link or the total weight from all tension links in the system. Can be interfaced with most PLC or notebook computers. Annunciators for low battery, peak hold, set points 1 & 2, lb, kg, tons, metric tons and dekaNewtons. Function keys for ON/OFF, ZERO, PEAK HOLD, MODE. RS232 or RS485 serial output. Efficient micro controller gives up to 800 hours of battery life, wireless remote control models have a reduced operating time. Power is supplied by (2) 9 volt alkaline batteries (not included). NEMA 4X and IP65.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| TL6000-50,000-RF | 50,000 x 50 lb | 55 lb | 5477 | $ 2,735.00 |
| **Options shackles** | | | | |
| 150103 Top & bottom | 50,000 lb | 63 lb | 3886 | 895.00 |
| **Remote Indicators** | | | | |
| 150114 Dual remote indicator, RF wireless | | 4 lb | 705 | 995.00 |
| Two indicators, one at tension link and one remote | | | | |

**150114**
**RF Wireless**
**Dual remote indicator**

Intercomp
advanced weighing technology ... by any measure

## TL6000 Tension Link Scale

For crane overload and line tension measurement. High resolution using a 14 bit A/D converter gives +/-0.1% of applied load. All electronics are shock mounted in a weatherproof billet aluminum housing. Components are protected against moisture, dust and rough usage. Weights are easily checked with highly visible 1.2" high LCD digital readout. The units easy to use membrane switches allow simple, trouble free operation. Features include peak hold, set points for relay control and keypad setup. Function keys for ON/OFF, ZERO, PEAK, TARE, MODE. Readings can be displayed in lb, kg, tons, metric tons, and dekaNewtons. RS232 or RS485 serial output in continuous or on demand. Efficient micro controller gives up to 500 hours of battery life. Power is supplied by (2) 9 volt alkaline batteries (not included). NEMA 4X and IP65.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| TL6000-1,000 | 1,000 x 1 lb | 5 lb | 3876 | $ 1,250.00 |
| TL6000-50,000 | 50,000 x 50 lb | 55 lb | 3881 | 2,235.00 |
| **Options shackles** | | | | |
| 150100 Top & bottom | 5,000 lb | 3 lb | 3883 | 99.00 |
| 150103 Top & bottom | 50,000 lb | 63 lb | 3886 | 895.00 |
| **Remote Indicators** | | | | |
| 189014 RFX Dual remote indicator, Two indicators, one at tension link and one remote | | 6 lb | 566 | 995.00 |
| **Service parts** | | | | |
| 240028 LCD display for TL6000 | | 0.08 lb | 3882 | 133.00 |

**TL6000**
**Tension Link Scale**

**150113**
**Dual Remote Indicators**





13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

**TL8500**
**Tension Link Scale**

## TL8500 Tension Link Scale

For crane overload and line tension measurement. High resolution using a 14 bit A/D converter gives +/-0.1% of applied load. All electronics are shock mounted in a weatherproof billet aluminum housing. Components are protected against moisture, dust and rough usage. Weights are easily checked with highly visible 1.2" high LCD digital readout. The units easy to use membrane switches allow simple, trouble free operation. Features include peak hold, set points for relay control and keypad setup. Function keys for ON/OFF, ZERO, PEAK, TARE, MODE. Readings can be displayed in lb, kg, tons, metric tons, and dekaNewtons. RS232 or RS485 serial output in continuous or on demand. Efficient micro controller gives up to 400 hours of battery life. Power is supplied by (2) 9 volt alkaline batteries (not included). NEMA 4X and IP65.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| TL8500-500 | 500 x 0.5 lb | 5 lb | 7928 | $ 1,395.00 |
| TL8500-1,000 | 1,000 x 1 lb | 5 lb | 7929 | 1,395.00 |
| TL8500-2,000 | 2,000 x 2 lb | 5 lb | 7930 | 1,395.00 |
| TL8500-5,000 | 5,000 x 5 lb | 5 lb | 7931 | 1,595.00 |
| TL8500-10,000 | 10,000 x 10 lb | 8 lb | 7932 | 1,795.00 |
| TL8500-25,000 | 25,000 x 20 lb | 35 lb | 7933 | 2,395.00 |
| TL8500-50,000 | 50,000 x 50 lb | 55 lb | 7934 | 2,495.00 |
| TL8500-100,000 | 100,000 x 100 lb | 75 lb | 7935 | 4,795.00 |
| TL8500-160,000 | 160,000 x 200 lb | 85 lb | 7936 | 5,095.00 |
| **Options shackles** | | | | |
| 150100 Top & bottom | 5,000 lb | 3 lb | 3883 | 99.00 |
| 150101 Top & bottom | 10,000 lb | 6 lb | 3884 | 195.00 |
| 150102 Top & bottom | 25,000 lb | 39 lb | 3885 | 605.00 |
| 150103 Top & bottom | 50,000 lb | 63 lb | 3886 | 895.00 |
| 150104 Top & bottom | 100,000 lb | 104 lb | 3887 | 2,925.00 |
| **Remote Indicators** | | | | |
| 189014 RFX Dual remote indicator, Two indicators, one at tension link and one remote | | 6 lb | 566 | 995.00 |
| **Options** | | | | |
| 150229 Set point relay output control kit | | 2 lb | 770 | 495.00 |

Link

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.


www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

ANYLOAD

## 100RH-WL Tension Link Scale

Wireless tension link or dynamometer with remote indicator. Alloy steel with powder coated finish IP67. Wireless distance 30m. 100 hours operating time. (3)AA batteries, included for link. Wireless indicator IP65 ABS wash down enclosure with LCD and backlight. (3)AA batteries, included for indicator. 2.8"x1.1" Function keys for ON/OFF, ZERO, PEAK, TARE. Units: kg, g, t, lb, Klb, N,kN, oz, user defined. (2)set points for precaution and warning. Auto power off. Auto zero tracking. IP65/IP67.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| 110RH-500kg-WL-FP7 | 500 x 0.1 kg | 2 lb | 3327 | $ 2,068.00 |
| 110RH-1t-WL-FP7 | 1,000 x 0.2 kg | 2 lb | 3328 | 2,068.00 |
| 110RH-2t-WL-FP7 | 2,000 x 0.5 kg | 2 lb | 3329 | 2,068.00 |
| 110RH-5t-WL-FP7 | 5,000 x 1 kg | 4 lb | 3331 | 2,780.00 |
| 110RH-10t-WL-FP7 | 10,000 x 2 kg | 6 lb | 3332 | 3,171.00 |
| 110RH-20t-WL-FP7 | 20,000 x 5 kg | 11 lb | 3333 | 4,241.00 |
| 110RH-30t-WL-FP7 | 30,000 x 10 kg | 45 lb | 3334 | 6,062.00 |
| 110RH-50t-WL-FP7 | 50,000 x 10 kg | 45 lb | 3335 | 7,327.00 |
| **Optional shackles** | | | | |
| SBX-2t | 500kg 1t, 2t | 2 lb | 2527 | 36.00 |
| SBX-3.25t | 1t, 2t, 3t | 2 lb | 2528 | 43.00 |
| SBX-4.75t | 2t, 3t | 2 lb | 2529 | 51.00 |
| SBX-6.5t | 5t | 2 lb | 2530 | 74.00 |
| SBX-12t | 10t | 2 lb | 2531 | 135.00 |
| SBX-13.5t | 10t | 2 lb | 2532 | 179.00 |
| SBX-25t | 20t | 2 lb | 2533 | 396.00 |
| SBX-35t | 30t | 2 lb | 2534 | 554.00 |
| SBX-55t | 50t | 2 lb | 2535 | 1,245.00 |
| SBX-120t | 100t | 2 lb | 2536 | 2,899.00 |
| **Service Parts** | | | | |
| 805HP-WL wireless indicator, | | 3 lb | 3337 | 982.00 |

**100RH-WL**
**Tension link**

**805HP-WL**
**Wireless indicator**

Link

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

**100ES-WL-HP**
**Tension link**
**Stainless steel**

**805HP-WL**
**Wireless indicator**

ANYLOAD

## 100ES Tension Link Scale

Wireless tension link or dynamometer with remote indicator. Salt water proof stainless steel IP69. Wireless distance 30m. 100 hours operating time. (3)AA batteries, included for link. Wireless indicator IP65 ABS wash down enclosure with LCD and backlight. (3)AA batteries, included for indicator. 2.8"x1.1" Function keys for ON/OFF, ZERO, PEAK, TARE. Units: kg, g, t, lb, Klb, N,kN, oz, user defined. (2)set points for precaution and warning. Auto power off. Auto zero tracking. IP65/IP69.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| 110ES-1t-WL02 | 1,000 x 0.2 kg | 2 lb | 5279 | $ 2,590.00 |
| 110ES-2.5t-WL02 | 2,500 x 0.5 kg | 2 lb | 5280 | 2,590.00 |
| 110ES-5t-WL02 | 5,000 x 1 kg | 4 lb | 5281 | 3,074.00 |
| 110ES-10t-WL02 | 10,000 x 2 kg | 6 lb | 5282 | 3,577.00 |
| 110ES-20t-WL02 | 20,000 x 5 kg | 11 lb | 5283 | 3,853.00 |
| 110ES-30t-WL02 | 30,000 x 10 kg | 45 lb | 5284 | 4,617.00 |
| 110ES-50t-WL02 | 50,000 x 10 kg | 45 lb | 5285 | 9,131.00 |
| 110ES-100t-WL02 | 100,000 x 20 kg | 90 lb | 5286 | 17,491.00 |
| **Optional shackles** | | | | |
| TBX-2t | 1t | 2 lb | 6154 | 59.00 |
| TBX-2.55t | 2.5t | 2 lb | 6155 | 74.00 |
| TBX-5t | 5t | 2 lb | 6156 | 97.00 |
| TBX-12.5t | 10t | 2 lb | 6157 | 228.00 |
| TBX-21t | 20t | 2 lb | 6158 | 567.00 |
| TBX-30t | 30t | 2 lb | 6159 | 689.00 |
| TBX-50t | 50t | 2 lb | 6160 | 2,009.00 |
| **Service Parts** | | | | |
| 805HP-WL wireless indicator, | | 3 lb | 3337 | 982.00 |

A&D WEIGHING DIVISION

## GX Precision balance

The world's most user friendly balances. Internal calibration mass. Super Hybrid Sensor. Vacuum fluorescent display. Weighing modes: gram, decimal ounce, decimal pound, pound/ounce, carat, pennyweight, troy ounce, grain, momme, percentage, counting, animal weighing. Standard RS232. Includes WinCT software on a CD for loading into your PC. This software will enable the output from the GX to be entered directly into a spread sheet program such as Excel. Splash proof keyboard and display. GLP/GMP/ISO compliance. Display auto power off function. Density calculation mode. Time & Date. Auto self calibration. Standard underhook. Auto power on function. Auto rezero function. Large square weighing pan. Front air bubble leveling. 120 VAC, 50/60 Hz, 7" x 12.5" x 3.4"H.

**GX Series**
**Precision balance**

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| GX-1000 | 1,110g x 0.001g | 165 x 165mm | 14 lb | 7034 | 3,240.00 |
| **Options** | | | | | |
| GX-11 Glass breeze break for GX-2000 & higher | | | 2 lb | 4696 | 328.65 |
| GX-13 Density determination kit | | | 1 lb | 4698 | 756.00 |
| AX:073003691-S In use cover for GX GF 200-1000 | | | 1 lb | 4700 | 27.56 |
| AX:073003692-S In use cover for GX GF 1200-8000 | | | 1 lb | 4701 | 32.30 |
| AX:073007197A In use cover for GXK GFK | | | 0.04 lb | 4804 | 27.56 |
| **Service Parts** | | | | | |
| TB-648 AC adapter 120VAC | | | 1 lb | 5340 | 60.00 |
| PZ:3470-SW switch board GX GF | | | 1 lb | 6161 | 87.98 |

**GX-A Balance**

A&D WEIGHING DIVISION

## GX-A Balance - Internal Calibration

Super hyrbid sensor. Reverse backlit LCD display. Softweare features include Impact Shock Detection, Flow Rate Display and Electronically Controlled Load where an automatic self diagnostic test is run before an internal readability test. Weighing applications: Counting with ACAI, Percent wighing, Density determination, Statistical calculation, Comparator HI/OK/LO, Underhook, Gross/Net/Tare. Weighing Units: g, lb, lb-oz, ozt, ct. mom, dwt, gr, pcs, %, SG, user programmable unit. GLP/GMP/GCP compliance, Universal Flex Coms, Passowrd protected. Function keys: ON/OFF, CAL, MODE, SAMPLE, PRINT, REZERO. Anti static breeze break, Front level buddle with LED illumination, key lock security, Fly Thumb Wheel feet. Stainless steel pan. 8.3" (W) x 12.5" (D) x 3.7" (H). 5 year warranty.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| GX-203A | 220 x 0.001g | 128 x 128mm | 12 lb | 1249 | $ 2,125.00 |
| GX-303A | 220 x 0.001g | 128 x 128mm | 12 lb | 1250 | 2,420.00 |
| GX-403A | 420 x 0.001g | 128 x 128mm | 12 lb | 1251 | 2,565.00 |
| GX-603A | 620 x 0.001g | 128 x 128mm | 12 lb | 1252 | 3,350.00 |
| GX-1003A | 1,100 x 0.001g | 128 x 128mm | 12 lb | 1253 | 3,865.00 |
| GX-1603A | 1,620 x 0.001g | 128 x 128mm | 12 lb | 1254 | 4,390.00 |
| GX-2002A | 2,200 x 0.01g | 128 x 128mm | 12 lb | 1255 | 2,420.00 |
| GX-3002A | 3,200 x 0.01g | 128 x 128mm | 12 lb | 1256 | 2,880.00 |
| GX-4002A | 4,200 x 0.01g | 128 x 128mm | 12 lb | 1257 | 3,010.00 |
| GX-6002A | 6,200 x 0.01g | 128 x 128mm | 12 lb | 1258 | 3,530.00 |
| GX-10002A | 10,200 x 0.01g | 128 x 128mm | 12 lb | 1259 | 4,745.00 |
| GX-6001A | 6,200 x 0.1g | 128 x 128mm | 12 lb | 1260 | 2,680.00 |
| GX-10001A | 10,200 x 0.1g | 128 x 128mm | 12 lb | 1261 | 2,750.00 |
| **Service Parts** | | | | | |
| 06:4005645 leveling foot | | | 0.03 lb | 1228 | 10.60 |
| PZ:3470-SW switch board GX GF | | | 1 lb | 6161 | 87.98 |





www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

A&D WEIGHING DIVISION

## FX-i Precision balance

Fast stabilization time of 1 second is due to the super hybrid sensor. Comparator function. Vacuum fluorescent display. Weighing units: g, oz, lb, lb-oz, ozt, ct, mom, dwt, GN, tl, tol, mes, pcs, %, MLT. Quick USB interface (FXi-02). Standard RS-232 interface. LAN Ethernet interface . 120 VAC adapter. 5 year warranty.
193 W x 262.5 D x 84.5 H mm.
NTEP Legal for Trade 08-045 = N suffix
Canada AM-5692 = C suffix

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| FX-120i w/breeze break | 122g x 0.001g | 130mm | 8.45 lb | 6253 | $ 1,495.00 |
| FX-300i w/breeze break | 320g x 0.001g | 130mm | 8.45 lb | 6274 | 1,555.00 |
| FX-1200i | 1,220g x 0.01g | 150mm | 8.45 lb | 6275 | 1,440.00 |
| FX-120iN w/breeze break | 122g x 0.001g | 130mm | 8.45 lb | 6737 | 1,495.00 |
| FX-3000iN | 3,200g x 0.01g | 150mm | 8.45 lb | 6797 | 1,675.00 |
| FX-1200iNC | 1,220g x 0.01g | 150mm | 8.45 lb | 6799 | 1,495.00 |
| FX-2000iNC | 2,200g x 0.01g | 150mm | 8.45 lb | 6713 | 1,555.00 |
| **Options** | | | | | |
| FXi-11 Breeze break large 7.9" h | | | 6 lb | 6282 | 180.00 |
| **Service Parts** | | | | | |
| 06:4005645 leveling foot | | | 0.03 lb | 1228 | 10.60 |
| 03-4017750 FXi metal pan support arm | | | 0.12 lb | 6220 | 15.90 |

**FX-300i**
**Precision balance**

A&D WEIGHING DIVISION

## FX Precision balance

External calibration. Large removable breeze break. Weighing units: g, mg, oz, oz-t, ct, momme, dwt, grain, pcs (counting mode), percent, DS (density mode). 120 VAC adapter.
7.8"W x 11.6"D x 12.4"H
NTEP Legal for Trade N suffix

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| FX-123 | 122g x 0.001g | 5.1" | 5.5 lb | 6115 | $ 1,495.00 |
| FX-123N | 122g x 0.001g | 5.1" | 5.5 lb | 6116 | 1,495.00 |
| FX-223 | 220g x 0.001g | 5.1" | 5.5 lb | 6117 | 1,585.00 |
| FX-223N | 220g x 0.001g | 5.1" | 5.5 lb | 6118 | 1,610.00 |
| FX-323 | 320g x 0.001g | 5.1" | 5.5 lb | 6119 | 1,555.00 |
| FX-323N | 320g x 0.001g | 5.1" | 5.5 lb | 6120 | 1,560.00 |
| FX-523 | 520g x 0.001g | 5.1" | 5.5 lb | 6121 | 1,775.00 |
| FX-1202 | 1,220g x 0.01g | 5.9" | 5.5 lb | 6122 | 1,440.00 |
| FX-1202N | 1,220g x 0.01g | 5.9" | 5.5 lb | 6123 | 1,510.00 |
| FX-2202 | 2,200g x 0.01g | 5.9" | 5.5 lb | 6124 | 1,505.00 |
| FX-2202N | 2,200g x 0.01g | 5.9" | 5.5 lb | 6125 | 1,555.00 |
| FX-3202 | 3,200g x 0.01g | 5.9" | 5.5 lb | 6126 | 1,655.00 |
| FX-3202N | 3,200g x 0.01g | 5.9" | 5.5 lb | 6127 | 1,675.00 |
| FX-5202 | 5,200g x 0.01g | 5.9" | 5.5 lb | 6128 | 1,780.00 |
| **IP65 Waterproof** | | | | | |
| FX-123WP | 122g x 0.001g | 5.1" | 6.0 lb | 2490 | 1,860.00 |
| FX-223WP | 220g x 0.001g | 5.1" | 6.0 lb | 2491 | 1,955.00 |
| FX-323WP | 320g x 0.001g | 5.1" | 6.0 lb | 2492 | 2,090.00 |
| FX-1202WP | 1,220g x 0.01g | 5.9" | 6.0 lb | 2493 | 1,850.00 |
| FX-2202WP | 2,200g x 0.01g | 5.9" | 6.0 lb | 2494 | 1,955.00 |
| FX-3202WP | 3,200g x 0.01g | 5.9" | 6.0 lb | 2495 | 2,085.00 |

**FX**
**Precision balance**



Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

A&D WEIGHING DIVISION

**AD-4212A**
**Production**
**Weighing System**

## AD-4212A Production Weighing System

Made for a production line. Indicator and controls in base unit. Weigh platform in compact separate unit that is located in the production equipment. 2 meter cable connects display with weighing unit. Standard RS232 for computer control. 120 VAC, 50/60 Hz, 7.6" x 12.6" x 3.3"H.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| AD-4212A-100 | 110g x 0.1mg | 50 x 50mm | 6 lb | 5531 | $ 7,025.00 |
| AD-4212A-200 | 210g x 1mg | 50 x 50mm | 6 lb | 5532 | 6,175.00 |
| AD-4212A-600 | 610g x 1mg | 50 x 50mm | 6 lb | 2408 | 6,815.00 |
| AD-4212A-1000 | 1,100g x 1mg | 50 x 50mm | 6 lb | 2409 | 7,060.00 |
| **Options** | | | | | |
| AD-4212A-01 BCD output, factory installed | | | 1 lb | 5533 | 725.00 |
| AD-4212A-07 Extension cable 3 meter | | | 1 lb | 5535 | 215.00 |
| AD-4212A-08 Ethernet interference w/ winCT-Plus | | | 5 lb | 5536 | 375.00 |
| AD-4212A-19 SS breeze break, 200g only | | | 1 lb | 5537 | 135.00 |
| AD-4212A-20 Metal leveling feet | | | 1 lb | 5538 | 86.10 |

**FZ-300i**
**Precision balance**

A&D WEIGHING DIVISION

## FZ-i Precision balance

Service parts only.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| **Options** | | | | | |
| AX: 073009456 FZ In use cover | | | 1 lb | 7005 | 20.00 |



Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

A&D WEIGHING DIVISION

## FZ Precision balance

Internal calibration. Large removable breeze break. Weighing units: g, mg, oz, oz-t, ct, momme, dwt, grain, pcs (counting mode), percent, DS (density mode). 120 VAC adapter. 7.8"W x 11.6"D x 12.4"H

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| FZ-123 | 122g x 0.001g | 5.1" | 6.6 lb | 3934 | $ 1,606.80 |
| FZ-223 | 220g x 0.001g | 5.1" | 6.6 lb | 3935 | 1,675.00 |
| FZ-323 | 320g x 0.001g | 5.1" | 6.6 lb | 3936 | 1,780.00 |
| FZ-523 | 520g x 0.001g | 5.1" | 6.6 lb | 3937 | 2,030.00 |
| FZ-1202 | 1,220g x 0.01g | 5.9" | 6.6 lb | 3938 | 1,710.00 |
| FZ-2202 | 2,200g x 0.01g | 5.9" | 6.6 lb | 3939 | 1,770.00 |
| FZ-3202 | 3,200g x 0.01g | 5.9" | 6.6 lb | 3940 | 1,825.00 |
| FZ-5202 | 5,200g x 0.01g | 5.9" | 6.6 lb | 3941 | 2,085.00 |
| **IP65 Waterproof** | | | | | |
| FZ-123WP | 122g x 0.001g | 5.1" | 7.1 lb | 2924 | 2,285.00 |
| FZ-223WP | 220g x 0.001g | 5.1" | 7.1 lb | 2925 | 2,370.00 |
| FZ-323WP | 320g x 0.001g | 5.1" | 7.1 lb | 2926 | 2,560.00 |
| FZ-1202WP | 1,220g x 0.01g | 5.9" | 7.1 lb | 2927 | 2,285.00 |
| FZ-2202WP | 2,200g x 0.01g | 5.9" | 7.1 lb | 2928 | 2,370.00 |
| FZ-3202WP | 3,200g x 0.01g | 5.9" | 7.1 lb | 2929 | 2,565.00 |

**FZ**
**Precision balance**

A&D WEIGHING DIVISION

## GF-A Precision Balance

**GF-A Precision Balance**

Super hybrid sensor. Reverse backlit LCD display. Software features include Impact Shock Detection, Flow Rate Display and Electronically Controlled Load where an automatic self diagnostic test is run before an internal readability test. Weighing application: Counting with ACAI, Percent weighing, Density determination, Statistical calculation, Comparator HI/OK/LO, Underhook, Gross/Net/Tare. Weighing Units: g, lb, lb-oz, ozt, ct, mom, dwt, gr, pcs, %, SG, user programmable unit. GLP/GMP/GCP compliance, Universal Flex Coms, Password protected. Function keys: ON/OFF, CAL, MODE, SAMPLE, PRINT, REZERO. Anti static breeze break, Front level bubble with LED illumination, key lock secuirty, Fly Thumb Wheel Feet.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| GF-123A | 122 x 0.001g | 128 x 128mm | 12 lb | 2063 | $ 1,565.00 |
| GF-203A | 220 x 0.001g | 128 x 128mm | 12 lb | 2064 | 1,770.00 |
| GF-303A | 320 x 0.001g | 128 x 128mm | 12 lb | 2065 | 2,000.00 |
| GF-403A | 420 x 0.001g | 128 x 128mm | 12 lb | 2066 | 2,160.00 |
| GF-603A | 620 x 0.001g | 128 x 128mm | 12 lb | 2067 | 2,550.00 |
| GF-1003A | 1,100 x 0.001g | 128 x 128mm | 12 lb | 2068 | 3,070.00 |
| GF-1603A | 1,620 x 0.001g | 128 x 128mm | 12 lb | 2069 | 3,945.00 |
| GF-1202A | 1,220 x 0.01g | 128 x 128mm | 12 lb | 2070 | 1,790.00 |
| GF-2002A | 2,200 x 0.01g | 128 x 128mm | 12 lb | 2071 | 1,845.00 |
| GF-3002A | 3,200 x 0.01g | 128 x 128mm | 12 lb | 2072 | 1,905.00 |
| GF-4002A | 4,200 x 0.01g | 128 x 128mm | 12 lb | 2073 | 2,445.00 |
| GF-6002A | 6,200 x 0.01g | 128 x 128mm | 12 lb | 2074 | 2,985.00 |
| GF-10002A | 10,200 x 0.01g | 128 x 128mm | 12 lb | 2075 | 3,680.00 |
| GF-6001A | 8,300 x 0.1g | 128 x 128mm | 12 lb | 2076 | 2.030.00 |
| GF-10000A | 10,200 x 0.1g | 128 x 128mm | 12 lb | 2077 | 2,125.00 |

A&D WEIGHING DIVISION

## GF-P Precision balance

**GF-P Precision balance**

Tough, die-cast aluminum housing. Ideal for pill counting and compounding. Fast, Super Hybrid Sensor (SHS). Removeable stainless steel pan. IP54 splash proof/dust proof stainless steel weighing pan. Large, bright vacuum fluorescent display. Multiple weighing modes. ONe second response time. Data memory function. Underhook. WinCT data collection software. Quick reference operation card. RS232C standard. GLP/LIMS/ISO compliance. 5 year warranty.
NTEP Legal for Trade 04-077P

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| GF-200P | 200 x 0.001g | 5” x 5” | 16 lb | 7575 | $ 1,690.50 |
| GF-300P | 310 x 0.001g | 5” x 5” | 16 lb | 7576 | 2,010.00 |
| **Options** | | | | | |
| TB: 648 AC adapter | | | 1 lb | 5340 | 60.00 |
| **Service Parts** | | | | | |
| 08:3003976 Keysheet GF | | | 1 lb | 7510 | 20.14 |



Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

## ALC Precision balance

Stainless steel weighing platform. State of the art technology provides accuracy, repeatability and outstanding performance at remarkably affordable prices. Large LCD display. Keys are: CAL, ON/OFF, ZERO, PRINT, F. Piece counting. Percent weighing for solids, moisture loss, formulation, quality control. Averaging for unstable ambient conditions. Net totaling for formulation. User selectable two unit toggling. Advanced microprocessor for accurate weighing results, digital filtering and fast stabilization. RS 232 bi-directional interface for connection to computer or printer. Lock down capability. Four selectable application programs. 20 different weighing modes. Simple one button external calibration. 120 VAC

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| ALC-150.3 | 150g x 1mg | 3.95” dia | 6 lb | 6818 | $ 920.00 |
| ALC-1100.2 | 1,100g x 0.01g | 5.9” dia | 5 lb | 6821 | 920.00 |

**ALC**
**Precision balance**

## PGL Precision Balance

Service parts only for Adam PGL.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| **Options** | | | | | |
| 3074010266 RS-232 cable | | | 1 lb | 7068 | 35.00 |
| **Service Parts** | | | | | |
| 302409160 adapter 120 VAC | | | 1 lb | 252 | 53.33 |

**PGL**
**Precision Balance**

## CY Precision Balance

Precision balance with large LCD backlit screen. CY4102C has motorized internal calibration. CY4102 uses external calibration weights. Units: g, mg, ct, GN, mo, oz, dwt, t1T, t1H, t1S, mom, Bat, MS. Applications: PCS, % Weighing, Custom unit, Animal weighing, Check weighing, Density determination, Formulation. Output via RS232 and USB-B. 342.5mm L x 212mm W x 89.5mm H. CY1003C has chamber height 169.5mm. 115 VAC.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| CY1003C | 1,000g x 0.001g | 128mm x 128mm | 15 lb | 4292 | $ 1,020.00 |
| CY4102 | 200g x 0.001g | 190mm x 205mm | 15 lb | 4297 | 780.00 |
| CY4102C | 200g x 0.001g | 190mm x 205mm | 15 lb | 4298 | 1,000.00 |

**CY1003C**
**Precision Balance**



Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

**HCB Highland**
**Precision balance**

## HCB Highland Precision balance

HandiCal internal calibration for fast and accurate readings. Three point ShockProtect protection designed for the ultimate in performance reliability. ABS plastic with stainless steel platform. 6 digit, 0.6" backlit LCD display. Left and right tare keys. Applications include weighing, percent weighing, parts counting, totalization/accumulation. Audible overload indicator. Lock down mounting slot for Kensington type lock and cable. Internal rechargeable battery with auto power off and low battery indicator. Capacity tracker. Removable draft shield. USB and RS-232 bidirectional interface included for easy connection to computers and printers. 12VDC 800mA adapter.
NTEP Legal for Trade

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| **Non-NTEP** | | | | | |
| HCB123 | 120 x 0.001g | 4.7"dia | 5 lb | 5299 | $ 710.00 |
| HCB153 | 150 x 0.005g | 4.7"dia | 5 lb | 5300 | 615.00 |
| HCB302 | 300 x 0.01g | 4.7"dia | 5 lb | 5301 | 615.00 |
| HCB602H | 600 x 0.01g | 4.7"dia | 5 lb | 5302 | 770.00 |
| HCB602 | 600 x 0.02g | 4.7"dia | 5 lb | 5303 | 615.00 |
| HCB1002 | 1,000 x 0.01g | 4.7"dia | 5 lb | 5304 | 900.00 |
| HCB1502 | 1,500 x 0.05g | 4.7"dia | 5 lb | 5305 | 715.00 |
| HCB2202 | 2,200 x 0.05g | 4.7"dia | 5 lb | 5327 | 1,065.00 |
| HCB3001 | 3,000 x 0.1g | 4.7"dia | 5 lb | 5306 | 615.00 |
| HCB6001 | 6,000 x 0.1g | 4.7"dia | 5 lb | 5328 | 855.00 |
| **NTEP Legal for Trade** | | | | | |
| HCB103aM | 100 x 0.001g | 4.7"dia | 8 lb | 167 | 900.00 |
| HCB302aM | 300 x 0.05g | 4.7"dia | 8 lb | 168 | 715.00 |
| HCB602aM | 600 x 0.01g | 4.7"dia | 8 lb | 169 | 790.00 |
| HCB1202aM | 1,200 x 0.01g | 4.7"dia | 8 lb | 170 | 920.00 |
| HCB3001aM | 3,000 x 0.5g | 4.7"dia | 8 lb | 171 | 770.00 |
| HCB5001aM | 5,000 x 0.5g | 4.7"dia | 8 lb | 172 | 790.00 |
| **Options** | | | | | |
| 308232030 In use cover | | | 1 lb | 5298 | 20.00 |
| **Service Parts** | | | | | |
| 302409160 adapter 120VAC | | | 1 lb | 252 | 53.33 |

**PGWe Series**
**Topload Balance**

## PGWe Topload Balance

Delivering the ultimate in speed and accuracy, the PGWe sets a new industry benchmark for reliability, durability and ease of use. 17 weighing units, 7 weighing modes. Backlit LCD with multilingual display. Keys are: PRINT, CALIBRATE, MODE, UNIT. Weighing units are: gram, milligram, kilogram, carat, grain, newton, dram, pound, ounce, troy ounce, pennyweight, momme, tael (Taiwan, Hong Kong and Singapore), tola, tical and 1 custom unit. Applications for weighing, net/total, check weighing, percentage weighing, weight accumulation, averaging, parts counting, animal/dynamic weighing, density determination, below balance weighing. Capacity tracker, RS 232 bi-directional interface, second communication port. 120 VAC adapter for 15 VDC, 800 ma Three year ADAM warranty.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| PGW3502e | 3,500g x 0.01g | 7.6" x 7.6" | 11 lb | 6963 | $ 1,075.00 |

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

OHAUS®

## EP Explorer Pro Precisioin balance

Explorer Pro balances are available with internal auto calibration or internal calibration. Weighing units: g, mg, kg, lb, oz, ozt, ct, dwt, taels(3), mommes, gn, ti, N, user definable custom unit. High resolution dot matrix alphanumeric display. User can select data fields to show on display including dual weighing units and ten messages. Configurable in English, French, Spanish, German and Italian. Applications include: Gross net tare weighing, GLP, GMP, parts counting, animal weighing, check weighing, filling, percent function, under hook for density and specific gravity. Cursor keys for ease in operation. RS232 interface. Adjustable filter for stabilization time. Stainless steel pan. 2 Year warranty. 100-120 VAC adapter, 8.3" x 14.5" x 14.5"H.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| **Without internal calibration weight** | | | | | |
| EP413 | 410g x 0.001g | 4.7"dia | 19 lb | 3338 | $ 2,376.00 |
| **Options** | | | | | |
| 80850043 Security Device up to 8kg | | | 1 lb | 1632 | 365.00 |
| 80253384 Density determination kit | | | 3 lb | 2794 | 1,219.00 |
| CBM-910 Impact printer, 42 column | | | 5 lb | 7426 | 395.00 |
| 80500570 RS232 cable to printer | | | 1 lb | 7429 | 193.00 |
| **Service Parts Explorer Pro** | | | | | |
| 83020938 line cord 120 VAC | | | 1 lb | 601 | 36.00 |

**EP612**
**Precision balance**

**EX223**
**Precision balance**

OHAUS®

## EX Explorer Precision balance

Intelligent performance. Intuitive software. Ingenious draftshield. Practical touchless sensors. 5.7" full color VGA graphic display. Touch screen. Weighing applications for: Weighing, Percent Weighing, Check Weighing, Dynamic/Animal Weighing, Filling, Totalization, Formulation, Differential Weighing, Density Determination, Peak Hold, Ingredient Costing, Pipette Adjustment, SQC. Weighing units for: gram, milligram, kilogram, carat, ounce, ounce troy, pound, pennyweight, grain, newton, momme, mesghal, Hong Kong tael, Singapore tael, Taiwan tael, tical, tola, baht, 3 custom units. RS232, USB communication. 100-240 VAC adapter. 9.1"W x 15.5"D x 13.8"H. 2 year warranty.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| **AutoCal** | | | | | |
| EX223 | 220g x 0.001g | 5.1" dia | 22 lb | 7760 | $ 3,960.00 |
| EX423 | 420g x 0.001g | 5.1" dia | 22 lb | 7761 | 4,631.00 |
| EX623 | 620g x 0.001g | 5.1" dia | 22 lb | 7762 | 5,658.00 |
| EX1103 | 1,100g x 0.001g | 5.1" dia | 22 lb | 7763 | 6,632.00 |
| EX2202 | 2,200g x 0.01g | 7.5" x 7.9" | 16 lb | 7764 | 4,283.00 |
| EX4202 | 4,200g x 0.01g | 7.5" x 7.9" | 16 lb | 7765 | 4,923.00 |
| EX6202 | 6,202g x 0.01g | 7.5" x 7.9" | 17 lb | 7766 | 5,587.00 |
| EX10202 | 10,200g x 0.01g | 7.5" x 7.9" | 17 lb | 7767 | 6,627.00 |
| EX6201 | 6,200g x 0.1g | 7.5" x 7.9" | 17 lb | 7768 | 4,646.00 |
| EX10201 | 10,200g x 0.1g | 7.5" x 7.9" | 17 lb | 7769 | 5,089.00 |
| **NTEP Legal for Trade 12-012 I/II** | | | | | |
| EX423N | 420g x 0.001g | 5.1" dia | 22 lb | 7569 | 5,161.00 |
| EX1103N | 1,100g x 0.001g | 5.1" dia | 22 lb | 7570 | 7,240.00 |
| EX4202N | 4,200g x 0.01g | 7.5" x 7.9" | 16 lb | 7571 | 5,406.00 |
| EX10202N | 10.200g x 0.01g | 7.5" x 7.9" | 17 lb | 7572 | 7,240.00 |
| EX10201N | 10,200g x 0.1g | 7.5" x 7.9" | 17 lb | 7620 | 5,593.00 |
| **Tradition Calibration (not AutoCal)** | | | | | |
| EX223/E | 220g x 1mg | 5.1" dia | 22 lb | 6957 | 3,398.00 |
| EX423/E | 420g x 1mg | 5.1" dia | 22 lb | 6958 | 4,108.00 |
| EX2202/E | 2,200 x 0.01g | 7.5" x 7.9" | 16 lb | 6959 | 3,707.00 |
| EX4202/E | 4,200g x 0.01g | 7.5" x 7.9" | 16 lb | 6960 | 4,322.00 |
| EX6202/E | 6,200g x 0.01g | 7.5" x 7.9" | 16 lb | 6961 | 4,948.00 |
| EX6201/E | 6,200g x 0.1g | 7.5" x 7.9" | 16 lb | 6962 | 3,972.00 |
| **Service Parts** | | | | | |
| 83033684 Top cover | | | 1 lb | 424 | 39.00 |
| 83033652 foot kit sp EX(4) | | | 1 lb | 346 | 117.00 |




www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

OHAUS®

## AX Adventurer Precision Balance

Color Touchscreen with wide viewing angle. Ingenious draftshield opens wide on both sides. Automatic internal calibration system that calibrates the balance daily. Real time clock with GLP/GMP data. Application modes for Weighing, Dynamic Weighing, Display Hold, Parts Counting, Density Determination, Totalization/Statistic, Percent Weighing, Check Weighing and Formulation. Weighing units for: gram, milligram, mesgal, Newton, ounce, pennyweight, baht, carat, grain, pound, Hong Kong tael, Singapore tael, Taiwan tael, tical, tola, ounce troy, 1 custom unit. RS232, (2)USB ports. 100-240 VAC adapter. 9.05"W x 13.93"D x 13.39"H. 2 year warranty.

**AX124**
**Precision Balance**

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| **AutoCal.** | | | | | |
| AX223 | 220g x 0.001g | 130mm dia | 18 lb | 8226 | 2,840.00 |
| AX423 | 420g x 0.001g | 130mm dia | 18 lb | 8227 | 3,424.00 |
| AX523 | 520g x 0.001g | 130mm dia | 18 lb | 8228 | 3,741.00 |
| AX622 | 620 x 0.01g | 175 x 195mm | 15 lb | 3966 | 2,152.00 |
| AX1502 | 1,520g x 0.01g | 175 x 195mm | 15 lb | 8229 | 2,627.00 |
| AX2202 | 2,200g x 0.01g | 175 x 195mm | 15 lb | 8230 | 2,798.00 |
| AX4202 | 4,200g x 0.01g | 175 x 195mm | 15 lb | 8231 | 3,513.00 |
| AX5202 | 5,200g x 0.01g | 175 x 195mm | 15 lb | 8232 | 3,979.00 |
| AX4201 | 4,200 x 0.1g | 175 x 195mm | 28 lb | 3973 | 2,319.00 |
| AX8201 | 8,200g x 0.1g | 175 x 195mm | 15 lb | 8233 | 2,708.00 |
| **External Calibration** | | | | | |
| AX223/E | 220g x 0.001g | 130mm dia | 18 lb | 3963 | 2,256.00 |
| AX423/E | 420g x 0.001g | 130mm dia | 18 lb | 3964 | 2,783.00 |
| AX523/E | 5208 x 0.001g | 130mm dia | 18 lb | 3965 | 3,066.00 |
| AX422/E | 420g x 0.01g | 175 x 195mm | 12 lb | 3967 | 1,582.00 |
| AX822/E | 420g x 0.01g | 175 x 195mm | 12 lb | 3968 | 1,865.00 |
| AX1502/E | 1,520g x 0.01g | 175 x 195mm | 49 lb | 3969 | 2,016.00 |
| AX2202/E | 2,200g x 0.01g | 175 x 195mm | 47 lb | 3970 | 2,179.00 |
| AX4202/E | 4,200g x 0.01g | 175 x 195mm | 47 lb | 3971 | 2,826.00 |
| AX2201/E | 2,200g x 0.1g | 175 x 195mm | 28 lb | 3972 | 1,782.00 |
| AX4201/E | 4,200g x 0.1g | 175 x 195mm | 28 lb | 3974 | 2,016.00 |
| AX8201/E | 8,200 x 0.1g | 175 x 195mm | 28 lb | 3975 | 2,256.00 |
| **NTEP Legal for Trade** | | | | | |
| AX423N | 420g x 0.001g | 130mm dia | 18 lb | 5329 | 3,657.00 |
| **NTEP Legal for Trade , AutoCal** | | | | | |
| AX223N/E | 220g x 0.001g | 130mm dia | 18 lb | 6532 | 2,497.00 |
| AX423N/E | 420g x 0.001g | 130mm dia | 18 lb | 6533 | 2,977.00 |
| AX523N/E | 520g x 0.001g | 130mm dia | 18 lb | 6534 | 3,306.00 |
| AX622N/E | 620g x 0.01g | 175 x 195mm | 18 lb | 6535 | 1,933.00 |
| AX1502N/E | 1,520g x 0.01g | 175 x 195mm | 18 lb | 6536 | 2,179.00 |
| AX2202N/E | 2,200g x 0.01g | 175 x 195mm | 18 lb | 6537 | 2,421.00 |
| AX4202N/E | 4,200g x 0.01g | 175 x 195mm | 18 lb | 6538 | 3,066.00 |
| AX8201N/E | 8,200g x 0.1g | 175 x 195mm | 18 lb | 6539 | 2,421.00 |
| **Options** | | | | | |
| 30064203 SF40A Dot Matrix printer, includes RS232 cable | | | 2 lb | 1754 | 1,517.00 |
| 80500525 Cable to IBM 9 pin serial | | | 1 lb | 3047 | 304.00 |
| 83021085 USB interface w/cable | | | 1 lb | 8234 | 304.00 |
| **Service Parts** | | | | | |
| 46001724 AC adapter 120VAC w/o prong set | | | 1 lb | 6164 | 80.00 |
| 46001776 Prong set, US only | | | 1 lb | 6226 | 36.00 |
| 30111777 in use cover for AX w/o draft shield | | | 0.83 lb | 3639 | 49.00 |
| 30111792 in use cover for AX w/draft shield | | | 1 lb | 3715 | 49.00 |
| 30111779 main board AX | | | 1 lb | 6527 | 672.00 |
| 30111768 keypad AX | | | 1 lb | 6528 | 63.00 |



Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

**PX163**
**Analytical Balance**

OHAUS

## PX Pioneer Precision Balance

Metal base, plastic top housing, removable stainless steel pan, Glass draftshield, integrated weigh-below hook, security bracket, calibration locl and in-use cover. Backlit liquid crystal display LCD. Weighing applications for: Basic Weighing, Parts Counting, Percent Weighing, Animal Weighing, Density Determination. Weighing units for: gram, milligram, kilogram, ounce, pound, carat, pennyweight, Troy ounce, grain, newton, momme, mesghal, Hong Kong tael, Singapore tael, Taiwan tael, tical, tola, baht, 1 custom unit. RS232, USB communication. 100-240 VAC adapter (included), 21.7"W x 15.2"D x 11.5"H. 2 year warranty.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| **External Calibration** | | | | | |
| PX163/E | 160g x 1mg | 4.72" dia | 15.4 lb | 3666 | $ 1,478.00 |
| PX323/E | 320g x 1mg | 4.72" dia | 15.4 lb | 3667 | 1,721.00 |
| PX1602/E | 1,600g x 0.01g | 7.09" dia | 11.0 lb | 1652 | 1,424.00 |
| PX2202/E | 2,200g x 0.01g | 7.09" dia | 11.0 lb | 1653 | 1,560.00 |
| PX3202/E | 3,200g x 0.01g | 7.09" dia | 11.0 lb | 1654 | 1,876.00 |
| PX4202/E | 4,200g x 0.01g | 7.09" dia | 11.0 lb | 1655 | 2,130.00 |
| PX2201/E | 2,200g x 0.1g | 7.09" dia | 11.0 lb | 1656 | 1,324.00 |
| PX4201/E | 4,200g x 0.1g | 7.09" dia | 11.0 lb | 1657 | 1,525.00 |
| **Internal Calibration** | | | | | |
| PX163 | 160g x 1mg | 4.72" dia | 15.4 lb | 3660 | 1,855.00 |
| PX323 | 320g x 1mg | 4.72" dia | 15.4 lb | 3661 | 2,084.00 |
| PX523 | 520g x 1mg | 4.72" dia | 15.4 lb | 3662 | 2,151.00 |
| PX1602 | 1,600g x 0.01g | 7.09" dia | 11.0 lb | 1646 | 1,766.00 |
| PX2202 | 2,200g x 0.01g | 7.09" dia | 11.0 lb | 1647 | 1,915.00 |
| PX3202 | 3,200g x 0.01g | 7.09" dia | 11.0 lb | 1648 | 2,252.00 |
| PX4202 | 4,200g x 0.01g | 7.09" dia | 11.0 lb | 1649 | 2,526.00 |
| PX2201 | 2,200g x 0.1g | 7.09" dia | 11.0 lb | 1650 | 1,633.00 |
| PX4201 | 4,200g x 0.1g | 7.09" dia | 11.0 lb | 1651 | 1,850.00 |
| **Service Parts** | | | | | |
| 30372521 function label EN PX | | | 0.02 lb | 1661 | 24.00 |
| 30529325 AC adapter 100-240VAC 10W 12VDC | | | 0.44 lb | 1664 | 77.00 |

OHAUS

## PA Pioneer Precision balance

Service parts for PA Pioneer Precision balance.

| Part Number | Weight | SKU | List |
|---|---|---|---|
| **Service Parts** | | | |
| 83020241 weighing pan 90mm PA | 0.4 lb | 1681 | $ 112.00 |

**AV412**
**Precision balance**

OHAUS

## AV Adventurer Pro Precision balance

Service parts for AV Adventurer Pro Precision balance.

| Part Number | Weight | SKU | List |
|---|---|---|---|
| **Service Parts** | | | |
| 46001724 AC adapter 120VAC w/o prong set | 1 lb | 6164 | $ 80.00 |
| 46001776 Prong set, US only | 1 lb | 6226 | 36.00 |
| 46001780 Prong set, International | 1 lb | 714 | 36.00 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.


www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

OHAUS®

## NV Navigator

Two touchless sensors which free up your hands for handling samples and minimizing wear and tear on the keypad. 6 digit, 7 segment with white LED backlight or red LED. 4 mechanical keys, raised with tactile feedback. Weighing units for: gram, kilogram, pound, ounce (decimal or fractional), pound (decimal or fractional), ounce troy, grain, newton, carat, pennyweight, Hong Kong tael, Taiwan teal, Singapore teal, tical, tola. Application modes for: Weighing, Percent Weighing, Parts Counting, Check Weighing, Display Hold, Accumulate/Totalize. Over-accept-under LCD or LED annunciators. Front mounted level bubble with illumination. Adjustable leveling feet with skid resistant rubber pads. Full capacity by subtraction tare range. User selectable external span or linearity calibration, digital with external weight. 12VDC AC adapter included or (4) AA batteries (not included). 8.03"W x 8.34"D x 5.27"H.

**Navigator**

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| NV123 | 120g x 0.001g | 3.7" dia | 3.3 lb | 6365 | $ 607.00 |
| NV223 | 220g x 0.001g | 3.7" dia | 3.3 lb | 6366 | 674.00 |
| NV323 | 320g x 0.001g | 3.7" dia | 3.3 lb | 6367 | 740.00 |
| NV222 | 220g x 0.01g | 5.7" dia | 3.3 lb | 2139 | 545.00 |
| NV422 | 420g x 0.01g | 5.7" dia | 3.3 lb | 2140 | 694.00 |
| NV622 | 620g x 0.01g | 5.7" dia | 3.3 lb | 6368 | 707.00 |
| NV1202 | 1,200g x 0.01g | 7.5" x 5.7" | 3.3 lb | 6369 | 788.00 |
| NV2202 | 2,200g x 0.01g | 7.5" x 5.7" | 3.3 lb | 6370 | 828.00 |
| NV3202 | 3,200g x 0.01g | 7.5" x 5.7" | 3.3 lb | 6371 | 867.00 |
| NV221 | 220g x 0.1g | 7.5" x 5.7" | 3.3 lb | 2141 | 319.00 |
| NV621 | 620g x 0.1g | 7.5" x 5.7" | 3.3 lb | 2142 | 467.00 |
| NV1201 | 1,200g x 0.1g | 7.5" x 5.7" | 3.3 lb | 2143 | 529.00 |
| NV2201 | 2,200g x 0.1g | 7.5" x 5.7" | 3.3 lb | 2144 | 587.00 |
| NVT2201 | 2,200g x 0.1g | 9.1" x 6.9" | 5.1 lb | 2145 | 587.00 |
| NVT4201 | 4,200g x 0.1g | 9.1" x 6.9" | 5.1 lb | 2146 | 734.00 |
| NVT2200 | 2,200g x 1g | 9.1" x 6.9" | 5.1 lb | 2147 | 555.00 |
| NVT6200 | 6,200g x 1g | 9.1" x 6.9" | 5.1 lb | 2148 | 734.00 |
| NVT12000 | 12,200g x 1g | 9.1" x 6.9" | 5.1 lb | 2149 | 793.00 |
| NVT22000 | 22,200g x 1g | 9.1" x 6.9" | 5.1 lb | 2150 | 948.00 |
| NVT6201 | 6,200g x 0.1g | 9.1" x 6.9" | 5.1 lb | 6372 | 739.00 |
| NVT10201 | 10,200g x 0.1g | 9.1" x 6.9" | 5.1 lb | 6373 | 778.00 |

**Options**

| | | | |
|---|---|---|---|
| 830332108 USB interface | | 6163 | 262.00 |
| 830332107 RS232 interface | | 6162 | 262.00 |
| 830332109 Ethernet interface | | 1747 | 262.00 |
| 30467963 Carrying case | | 1749 | 172.00 |
| 30467987 Adapter w/ships (5) countries(EU,US,UK,AU,KR) | | 2875 | 65.00 |
| 30064203 SF40A Dot Matrix printer, includes RS232 cable | 2 lb | 1754 | 1,552.00 |





13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

WLC
Bench

## WLC Precision

Stainless steel weighing platter. Fast and precise mass determination in laboratory and industrial conditions. Excellent in areas with no access to mains. Backlit LCD display. Counting pieces. Checkweighing and percentage. Animal weighing. Caps lock of max indication. Measurement in Newton. WLCA2 have the option of weighing loads outside the weighing platform (under hook weighing). Includes internal rechargeable battery and RS232 output.

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| WLC2/A2 | 2kg x 0.01g | 7.7" x 7.7" | 5 lb | 7617 | $ 757.00 |
| WLC10/A2 | 10kg x 0.1g | 7.7" x 7.7" | 9 lb | 7621 | 757.00 |
| WLC20/A2 | 20kg x 0.1g | 7.7" x 7.7" | 9 lb | 7622 | 802.00 |

WTC
Bench

## WTC Precision

Internal rechargeable battery for portable operation. Fast and precise mass determination in laboratory and industrial conditions. Stainless steel weighing pan. Backlit LCD display. Checkweighing, Parts Counting, Percent, Totalizing, Animal weighing, Peak hold. Includes internal rechargeable battery. Optional RS232 output. IP43.

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| WTC200 | 200 g x 0.001 g | 100mm dia | 3.88 lb | 67 | $ 581.00 |
| WTC600 | 600 g x 0.01 g | 128x128mm | 3.88 lb | 122 | 488.00 |
| WTC2000 | 2,000 g x 0.01 g | 128x128mm | 3.88 lb | 68 | 548.00 |
| WTC3000 | 3,100 g x 0.1 g | 128x128mm | 3.88 lb | 123 | 608.00 |

sartorius

## Midrics Level 1 & 2 Precision balance

Rugged construction. 2 display and indicator units. 4 adjustable feet. Level indicator. 10 weighing ranges from 3kg to 3t.
**Midrics 1** for simple weighing tasks.
**Midrics 2** with 10 key touch pad and applications programs. Applications include: counting, checkweighing, classification, totalizing, net-total formulation, animal weighing, percent weighing, neutral measurement.
Stainless steel. Indicator is stainless steel and IP65. Stainless steel versions are suited for industrial use in wet environments.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| **Midrics Level 1 Weigh Only** | | | | | |
| MW1P1U-3DC-L | 3kg x 0.002kg | 12.6” x 9.4” | 21 lb | 4943 | $ 1,665.00 |
| MW1P1U-6DC-L | 6kg x 0.005kg | 12.6” x 9.4” | 21 lb | 4944 | 1,665.00 |
| MW1P1U-15DC-L | 15g x 0.001kg | 12.6” x 9.4” | 21 lb | 4945 | 1,665.00 |
| MW1P1U-30ED-L | 30kg x 0.002kg | 15.7” x 11.8” | 30 lb | 4946 | 1,841.00 |
| MW1P1U-60ED-L | 60kg x 0.005kg | 15.7” x 11.8” | 30 lb | 4947 | 1,841.00 |
| MW1P1U-60FE-L | 60kg x 0.005kg | 19.7” x 15.7” | 37 lb | 4948 | 2,055.00 |
| MW1P1U-150FE-L | 150kg x 0.01kg | 19.7” x 15.7” | 37 lb | 4949 | 2,055.00 |
| **Midrics Level 2 Weight & Keypad** | | | | | |
| MW2P1U-3DC-L | 3kg x 0.0002g | 12.6” x 9.4” | 21 lb | 4951 | 1,348.00 |
| MW2P1U-6DC-L | 6kg x 0.0005kg | 12.6” x 9.4” | 21 lb | 4952 | 1,348.00 |
| MW2P1U-15DC-L | 15kg x 0.001kg | 12.6” x 9.4” | 21 lb | 4953 | 1,348.00 |
| MW2P1U-30ED-L | 30kg x 0.002kg | 15.7” x 11.8” | 30 lb | 4954 | 1,409.00 |
| MW2P1U-60ED-L | 60kg x 0.005kg | 15.7” x 11.8” | 30 lb | 4955 | 1,409.00 |
| MW2P1U-60FE-L | 60kg x 0.01kg | 19.7” x 15.7” | 37 lb | 4956 | 1,666.00 |
| MW2P1U-150FE-L | 150kg x 0.01kg | 19.7” x 15.7” | 37 lb | 4957 | 1,666.00 |
| **Options** | | | | | |
| YDH01CWSUS 13” Column SS column | | | 4 lb | 4962 | 195.00 |
| YDH02CWSUS 19.7” High SS column | | | 5 lb | 4964 | 210.00 |
| YDH03CWSUS 29.5” SS Column | | | 7 lb | 4966 | 241.00 |

**Midrics Level 1 Weigh only Precision balance**

**Midrics Level 2 Precision balance**

sartorius

## CP Precision balance

Service parts only for Sartorius CP.

| Part Number | Weight | SKU | List |
|---|---|---|---|
| **Service Parts** | | | |
| 6971500 Power supply 110VAC | 3 lb | 3054 | $ 667.00 |
| YDP03-OCE Data printer with statistics & time/date* | 5 lb | 3751 | 980.00 |

* Order printer power supply separately

sartorius

## Practum

Unmatched reliability with the world class weighing instrument. Fast and easy data transfer. Touch screen with Sartorius graphical useer interface. Overload protection for years of reliability. Glass level indicator with air bubble for centering. External calibration. Standard built in applications for: Weighing, Density, Percentage, Checkweighing, Peak Hold, COunting, Unstable Conditions. Selectable weighig units for: Gram, Kilogram, Carat, Pound, Ounce, Troy Ounce, Honk Kong Tael, Singapore Tael, Taiwan Tael, Grain, Pennyweights, Milligram, Parts Per Pound, China Tael, Mommes, Austrian Carat, Tola, Baht, Mesghal and Newton. USB port. 100-240 VAC, 50/60 Hz.

**Practum 2012-1S**
**Precision balance**

**Practum 213-1S**
**Precision balance**

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| Practum 124-1S | 120g x 0.1mg | 3.5” | 11 lb | 7605 | $ 2,530.00 |
| Practum 224-1S | 220g x 0.1mg | 3.5” | 11 lb | 7606 | 2,780.00 |
| Practum 213-1S | 210g x 0.001g | 4.75” | 10 lb | 7607 | 1,440.00 |
| Practum 313-1S | 310g x 0.001g | 4.75” | 10 lb | 7608 | 1,555.00 |
| Practum 612-1S | 610g x 0.01g | 7” | 8 lb | 7609 | 1,130.00 |
| Practum 1102-1S | 1100g x 0.01g | 7” | 8 lb | 7610 | 1,250.00 |
| Practum 2102-1S | 2100g x 0.01g | 7” | 8 lb | 7611 | 1,310.00 |
| Practum 5101-1S | 5100g x 0.1g | 7” | 8 lb | 7612 | 1,335.00 |
| Practum 5100-1S | 5100g x 1.0g | 7” | 8 lb | 7625 | 1,030.00 |

sartorius

## TE Precision balance

Weighing craftsmanship that is easy to afford. Left and right tare keys. Typical modes of use are counting of small parts, weighing in percent, net-total calculation, toggling between two weight units, weigh averaging. Battery operable units without 'S' suffix use (8) AA batteries. RS232 data interface. LCD Liquid Crystal Display. Includes AC adapter.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| TE212 | 210 x 0.01g | 4.6"dia | 8 lb | 4677 | $ 595.00 |
| **Options** | | | | | |
| YDP03-OCE Data printer with statistics & time/date | | | 5 lb | 3751 | 980.00 |
| YCC01-USBM2 cable RS232 to USB | | | 1 lb | 3763 | 221.00 |

**TE212**
**Precision Balance**

sartorius

## M-Prove Precision balance

Very compact design. Can be stacked. The M-Class balances were developed especially for ambitious first time users in the laboratory and academic sector. Keys for I/O, ZERO, CAL, F, ENTER, PRINT. 9VDC battery (not included). 120VAC adapter, included.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| AY123 | 120 x 0.001g | 97mm dia | 4.19 lb | 7703 | $ 475.00 |

**AY123**
**Precision Balance**

aczel
Solution Simplified

## CZ Precision Balance NTEP

Backlit LCD display 15mm high.
Capacity bar graph
Standard RS232 port.
Battery operated 40 hour usage with 12 hour charging time.
6.5"W x 11"D x 5"H.
NTEP Legal for Trade 09-109

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| CZ602 | 600g x 0.01g | 120mm dia | 4 lb | 4304 | $ 410.00 |
| CZ1202 | 1,200g x 0.01g | 120mm dia | 4 lb | 4302 | 570.00 |
| CZ1200 | 1,200g x 0.1g | 140mm X 150mm | 4 lb | 4301 | 410.00 |
| CZ6000H | 6,000g x 0.1g | 140mm X 150mm | 4 lb | 4303 | 440.00 |

**CZ1202**
**Precision Balance**



Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

**HI410S**
**Precision balance**

**SI2000S**
**Precision balance**

## HI & SI Precision balance

Award winning variable capacitance sensing technology. Large bright LED display. Rapid update rate for filling. Bidirectional RS232. Rugged die cast aluminum housing. Chemically resistant keypad. Stainless steel weighing pan. Standard RS232 interface.
HI series has keys for CAL, MODE, PRINT, UNITS, TARE/POWER, %. Units are grams, ounces, carats, %, g per second, user defined unit. Fast or slow update rate. Print will transmit data instantaneously, continuously or at selected intervals.
SI has keys for MODE, TARE/POWER. Dual range balances display the finest resolution whenever the balance is tared, regardless of how much weight is zeroed out.
120 VAC adapter, 11"L x 7"W x 3"H.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| HI410S * | 410g x 0.001g | 4.75" dia | 10 lb | 6070 | $ 3,004.79 |
| HI4100S | 4,100g x 0.01g | 6.25" dia | 10 lb | 6071 | 2,754.39 |
| SI200S * | 200g x 0.001g | 4.75" dia | 10 lb | 6072 | 2,654.23 |
| SI410D * | 100g x 0.001g<br>410g x 0.01g | 4.75" dia | 10 lb | 6073 | 2,302.67 |
| SI410S * | 410g x 0.001g | 4.75" dia | 10 lb | 6074 | 2,754.39 |
| SI2000S | 2,000g x 0.01g | 6.25" dia | 10 lb | 6075 | 2,303.67 |
| SI4100D | 1,000g x 0.01g<br>4,100g x 0.1g | 6.25" dia | 10 lb | 6076 | 2,303.67 |
| SI4100S | 4,100g x 0.01g | 6.25" dia | 10 lb | 6077 | 2,503.99 |

* Cylindrical draftshield included

**Options**

| | | | |
|---|---|---|---|
| 407914R Draftshield, 3 way glass door for 4.75"dia pan | 2 lb | 6080 | 461.09 |
| 407902 CC Dustcover | 1 lb | 6082 | 45.00 |

**Service Parts**

| | | | |
|---|---|---|---|
| 407712 120 VAC adapter | 1 lb | 6066 | 141.60 |
| 409748 Supercount AC adapter | 1 lb | 6083 | 141.60 |
| 404290-01R load cell 1kg | 5 lb | 6062 | 1,785.32 |
| 404290-02R load cell 2.5kg | 5 lb | 6041 | 1,785.32 |
| 404290-04R load cell 12.5kg | 5 lb | 6042 | 1,785.32 |
| 404290-05R load cell 25kg | 5 lb | 6043 | 1,785.32 |
| 404290-06R load cell 34kg | 5 lb | 6088 | 1,794.17 |
| 404290-07R load cell 50kg | 5 lb | 6044 | 1,785.32 |

A&D WEIGHING DIVISION

## MX MF ML MS Moisture Analyzers

Fast and uniform heating with halogen lamp. Four measurement programs: Standard, Automatic, timer, Manjal. Memory function for testa parameters and results. Up to 20 measurements conditions can be stored and recalled in MX-50. 10 can be stored in MF-50. Large, clear, easy to see VFD display. Plexiglass window for checking heating process. Conformity to GLP, GMP, GCP and ISO with date/time. ID, calibration data and check record outputs. Includes (20)sample pans, (2) pan handles, tweezers, spoon, test sample (30g of sodium tartrate dihydrate), CD-ROM (WinCT-Moisture for MX-50, WinCT for MF-50), RS232C cable for MX-50, display cover, dust cover, instruction manual, quick reference card, power cable, (2) fuses. 120 VAC, 50/60 Hz, 400 Watts, 5.4"W x 8.1"D x 4.4"H.

| Part Number | Capacity | Percent | Pan | Weight | SKU | List |
|---|---|---|---|---|---|---|
| MX-50 | 51g x 0.001g | 100 x 0.01% | 2.16"dia | 16 lb | 4522 | $ 4,530.00 |
| MF-50 | 51g x 0.002g | 100 x 0.05% | 2.16"dia | 16 lb | 4523 | 3,660.00 |
| ML-50 | 51g x 0.005g | 100 x 0.1% | 2.16"dia | 16 lb | 4890 | 3,150.00 |
| MS-70 | 71g x 0.001g | 100 x 0.001% | 2.16"dia | 16 lb | 4447 | 7,295.00 |

**Service Parts**

| | | | |
|---|---|---|---|
| AX-31 Sample pans (washable, 100 ea) | 1 lb | 4524 | 130.00 |
| AX-32 Glass fiber sheets (100 ea) | 1 lb | 4525 | 70.00 |
| AX-33 Sodium tartrate dihydrate test samples (30g x 12 ea) | 1 lb | 4526 | 115.00 |
| AX-34 Halogen lamp (replacement) | 1 lb | 4527 | 85.00 |
| AX-35 Pan handles (2 ea) | 1 lb | 4528 | 30.00 |
| AX-36 Tweezers (2 ea) | 1 lb | 4529 | 20.00 |
| AX-37 Spoons (2 ea) | 1 lb | 4530 | 25.00 |
| AX-38 Display covers (5 ea) | 1 lb | 4531 | 60.00 |
| AX-39 Dust cover | 1 lb | 4532 | 20.00 |
| AX-42 WinCT-Moisture (std for MX-50, option for MF-50) | 1 lb | 4533 | 320.00 |
| AD-1700-20g Calibration Mass 20g | 1 lb | 4360 | 145.00 |
| AX-43 Temperature Calibration (MX-50) | 1 lb | 4547 | 595.00 |
| PZ:3844-3852 Transformer/power supply bd MX MF | 1 lb | 4548 | 253.34 |
| PZ:3843-HITAR Heater relay bd MX MF | 1 lb | 4549 | 135.68 |

**MF-50**
**Moisture Balance**

**MX-50**
**Moisture Balance**



Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

**MB120**
**Moisture Balance**

OHAUS®

## MB120 Moisture Determination Balance

Automatic determination of moisture content. GLP compliant format when printed results are required. Fast halogen element provides uniform infrared heating up to 200 deg C. Heat from 50 deg C to 180 deg C in less than 1 minute. Display shows % moisture, % solids, weight, time, temperature and drying time. Program and recall up to 50 drying procedures. Once programmed, simply select and run test. Allows simple test editing to find best result. Auto shut off. Programming options are fast, standard, ramp or step. RS232 bidirectional interface is standard. 2 Year warranty. 120 VAC, 50/60 Hz, 7.5"W x 14"D x 6"H, 3.5" dia pan.

| Part Number | Capacity | Percent | Pan | Weight | SKU | List |
|---|---|---|---|---|---|---|
| MB120 | 120g x 0.01g | 100 x 0.01% | 3.5"dia | 19 lb | 4678 | $ 7,704.00 |
| **Options** | | | | | | |
| 80850043 Security Device up to 8kg | | | | 1 lb | 1632 | 365.00 |
| CBM-910 Impact printer, 42 column | | | | 5 lb | 7426 | 395.00 |
| 11113857 Temperature calibration kit | | | | 1 lb | 3042 | 926.00 |
| 80500525 Cable to IBM 9 pin serial | | | | 1 lb | 3047 | 304.00 |
| 80500571 Cable to SF42 Impact printer | | | | 1 lb | 3048 | 304.00 |
| 80850080 WinWedge software | | | | 1 lb | 2436 | 837.00 |
| **Service Parts** | | | | | | |
| 80850087 Pads, glass fiber, 200/box | | | | 1 lb | 3043 | 164.00 |
| 80850086 Sample pans, 50/box | | | | 1 lb | 3044 | 105.00 |
| 80850088 Reusable sample pans, pack of 3 | | | | 1 lb | 3045 | 318.00 |

**MB200**
**Moisture Balance**

OHAUS®

## MB200 Moisture Determination Balance

Options and service parts only for MB200.

| Part Number | Weight | SKU | List |
|---|---|---|---|
| **Options** | | | |
| 80850000 Anti theft security device | 1 lb | 1295 | $ 142.00 |
| **Service Parts** | | | |
| 80780012 Pan liners, pack of 100, 5"dia aluminum | 1 lb | 533 | 129.00 |
| 6081-B0 Pan liners, pack of 1,000, 5"dia aluminum | 9 lb | 577 | 256.00 |



Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

OHAUS®

## MB23 Moisture Analyzer Balance

Infrared heating. MB series combine high quality and durable construction into sleek, compact designs. One button setup. Large backlit LCD display. Manual, timed or auto shutoff. Standard RS232 port. Readabilities of 0.1%. 2 year warranty. 100 to 240 VAC, 50/60 Hz. 6.5"W x 11"D x 5"H.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| MB23 | 110g x 0.01g | 3.5" dia | 9 lb | 4028 | $ 4,529.00 |

**MB23**
**Moisture Analyzer Balance**

OHAUS®

## MB90 Moisture Analyzer Balance

Fast Halogen heating technology. Large touchscreen display. Icon driven menu navigation. Stainless steel drying pan. Four mechanical keys for fast one step ooperation, Tare, Start/Stop, Print, On/Off. Manual, timed or auto shutoff. Standard RS232 port. Readabilities of 0.01%. 2 year warranty. 100 to 240 VAC, 50/60 Hz. 6.5"W x 11"D x 5"H.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| MB90 | 90g x 0.001g | 3.5" dia | 9 lb | 4065 | $ 5,249.00 |

**MB90**
**Moisture Analyzer Balance**

aczel
Solution Simplified

## MB Moisture Analyzer Balance

Fast Halogen heating technology. Graphic alpha numeric LED backlit LCD display. Manual, timed or auto shutoff. Standard RS232 port. Readabilities of 0.01%. 115 VAC, 60 Hz 415Watt. 6.5"W x 11"D x 5"H.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| MB50 | 50g x 0.001g | 100mm dia | 10 lb | 4306 | $ 1,430.00 |
| MB200 | 200g x 0.001g | 100mm dia | 10 lb | 4305 | 1,650.00 |

**MB50**
**Moisture Analyzer Balance**

**MB32**
**Moisture Analyzer**

OHAUS®

## MB32 Moisture Analyzer

Routine moisture testing.
LCD display with second line display.
New carbon fiber heating technology.
Upgraded load cell shortens analysis time.
120 VAC, 50/60 Hz.
8.26"W x 13.86"D x 5.43"H.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| MB32 | 90 g x 1 mg | 3.5" dia | 13.4 lb | 3372 | $ 3,635.00 |
| **Options** | | | | | |
| 30954234 pan handler MB32,MB62,M92 | | | 1 lb | 3375 | 105.00 |
| 30954235 in use cover MB32,MB62 | | | 1 lb | 3376 | 30.00 |
| 11113857 temperature calibration kit | | | 1 lb | 3042 | 926.00 |
| 30284477 scoop | | | 1 lb | 3378 | 83.00 |
| SF40A impact printer | | | 2 lb | 1754 | 1,552.00 |
| 30304101 interface kit RS232 USB | | | 1 lb | 3379 | 229.00 |
| 30304102i nterface kit RS232 Ethernet | | | 1 lb | 3380 | 229.00 |
| 80252477 sample cage | | | 1 lb | 3381 | 166.00 |
| 80252478 reusable pan(3), 7mm | | | 1 ln | 3382 | 139.00 |
| 80252479 reusable pan(3), 14mm | | | 1 ln | 3383 | 145.00 |
| 80500525 cable RS232 IBM 9 pin M-F | | | 1 lb | 3047 | 304.00 |
| 80850043 security device | | | 1 lb | 1632 | 365.00 |
| 80850086 aluminum pan(80) | | | 1 lb | 3044 | 105.00 |
| 80850087 glass fiber pads(200) | | | 1 lb | 3043 | 164.00 |

**MB62**
**Moisture Analyzer**

OHAUS®

## MB62 Moisture Analyzers

Variety of moisture applications.
5 inch LCD display with knob control.
New carbon fiber heating technology.
Upgraded load cell shortens analysis time.
120 VAC, 50/60 Hz.
8.26"W x 13.86"D x 5.43"H.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| MB62 | 90 g x 1 mg | 3.5" dia | 13.4 lb | 3373 | $ 4,625.00 |
| **Options** | | | | | |
| 30954234 pan handler MB32,MB62,M92 | | | 1 lb | 3375 | 105.00 |
| 30954235 in use cover MB32,MB62 | | | 1 lb | 3376 | 30.00 |
| 11113857 temperature calibration kit | | | 1 lb | 3042 | 926.00 |
| 30284477 scoop | | | 1 lb | 3378 | 83.00 |
| SF40A impact printer | | | 2 lb | 1754 | 1,552.00 |
| 30304101 interface kit RS232 USB | | | 1 lb | 3379 | 229.00 |
| 30304102i nterface kit RS232 Ethernet | | | 1 lb | 3380 | 229.00 |
| 80252477 sample cage | | | 1 lb | 3381 | 166.00 |
| 80252478 reusable pan(3), 7mm | | | 1 ln | 3382 | 139.00 |
| 80252479 reusable pan(3), 14mm | | | 1 ln | 3383 | 145.00 |
| 80500525 cable RS232 IBM 9 pin M-F | | | 1 lb | 3047 | 304.00 |
| 80850043 security device | | | 1 lb | 1632 | 365.00 |
| 80850086 aluminum pan(80) | | | 1 lb | 3044 | 105.00 |
| 80850087 glass fiber pads(200) | | | 1 lb | 3043 | 164.00 |



Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

OHAUS®

## MB92 Moisture Analyzer

High performance with advanced features.
Full color capacitive touchscreen.
New carbon fiber heating technology.
Upgraded load cell shortens analysis time.
Multiple drying profiles, shut off criteria
120 VAC, 50/60 Hz.
8.26"W x 13.86"D x 5.43"H.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| MB92 | 90 g x 1 mg | 3.5" dia | 13.4 lb | 3374 | $ 5,397.00 |

**Options**

| | | | |
|---|---|---|---|
| 30954234 pan handler MB32,MB62,M92 | 1 lb | 3375 | 105.00 |
| 30954269 in use cover MB92 | 1 lb | 3377 | 74.00 |
| 11113857 temperature calibration kit | 1 lb | 3042 | 926.00 |
| 30284477 scoop | 1 lb | 3378 | 83.00 |
| SF40A impact printer | 2 lb | 1754 | 1,552.00 |
| 30304101 interface kit RS232 USB | 1 lb | 3379 | 229.00 |
| 30304102 interface kit RS232 Ethernet | 1 lb | 3380 | 229.00 |
| 80252477 sample cage | 1 lb | 3381 | 166.00 |
| 80252478 reusable pan(3), 7mm | 1 ln | 3382 | 139.00 |
| 80252479 reusable pan(3), 14mm | 1 ln | 3383 | 145.00 |
| 80500525 cable RS232 IBM 9 pin M-F | 1 lb | 3047 | 304.00 |
| 80850043 security device | 1 lb | 1632 | 365.00 |
| 80850086 aluminum pan(80) | 1 lb | 3044 | 105.00 |
| 80850087 glass fiber pads(200) | 1 lb | 3043 | 164.00 |

**MB92**
**Moisture Analyzer**

sartorius

## MA35 Moisture Balance

Quick and reliable analysis using thermogravimetric method. Fully Automatic infared moisture analyzer, perfect for routine operation. Sartorius MA35 is a long-lasting, rugged built, impervious to vibration and dirt, reliable even in a harsh environment. Simple use, quick measurment results with heating elements generating 360 watts of power. Temp. settings 40-160 deg C. Measures display: % of moisture, % dry mass, % ATRO, g residue conformity to GLP, data interference RS232C-S, 7 data-bit ASCII multi language selection. Power consumption max. 400VA. Power 115VAC case dimensions 224"W x 366"D x 191"H mm.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| MA35M-115US | 350g x 0.01g | 17 lb | 4725 | $ 3,630.00 |
| MA357-1US | 70g x 0.001g | 19 lb | 4832 | 3,600.00 |

**MA35**
**Moisture Balance**

A&D WEIGHING DIVISION

## GX Industrial Balance

The resolution and functions of analytical balances with the capacity and ruggedness of industrial balances. Adjustable swing arm display. Weighing modes: gram, decimal ounce, decimal pound, carat, pennyweight, troy ounce, grain, momme. Percentage and counting modes. Internal calibration weight. RS232 output is standard. Stainless steel weighing pan. 120 VAC, 50/60 Hz, 15.2"W x 13.5"D x 5.12"H.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| **Swing arm display** | | | | | |
| GX-12001L | 12,000 g x 0.1 g | 15.2" x 13.5" | 33 lb | 4740 | $ 4,465.00 |
| GX-22001L | 22,000 g x 0.1 g | 15.2" x 13.5" | 33 lb | 4741 | 4,920.00 |
| GX-32001L | 32,000 g x 0.1 g | 15.2" x 13.5" | 33 lb | 4742 | 5,845.00 |
| GX-32001LD | 32,000 g x 1 g<br>6,200 g x 0.1 g | 15.2" x 13.5" | 33 lb | 4744 | 4,070.00 |
| GX-42001L | 42,000 g x 0.5 g | 15.2" x 13.5" | 33 lb | 4746 | 5,425.00 |
| GX-62001L | 62,000 g x 0.1 g | 15.2" x 13.5" | 33 lb | 4747 | 7,655.00 |
| GX-62000L | 62,000 g x 1 g | 15.2" x 13.5" | 33 lb | 4749 | 6,675.00 |
| GX-102000L | 102,000 g x 1 g | 15.2" x 13.5" | 33 lb | 4751 | 7,025.00 |
| **Detached display** | | | | | |
| GX-32001LS | 32,000 g x 0.1 g | 15.2" x 13.5" | 33 lb | 4743 | 6,255.00 |
| GX-32001LDS | 32,000 g x 1 g<br>6,200 g x 0.1 g | 15.2" x 13.5" | 33 lb | 4745 | 4,540.00 |
| GX-62001LS | 62,000 g x 0.1 g | 15.2" x 13.5" | 33 lb | 4748 | 7,440.00 |
| GX-62000LS | 62,000 g x 1 g | 15.2" x 13.5" | 33 lb | 4750 | 6,965.00 |
| GX-102000LS | 102,000 g x 1 g | 15.2" x 13.5" | 33 lb | 4752 | 7,575.00 |
| **Options** | | | | | |
| GXL-04 Comparator relay output for GP-L | | | 1 lb | 4753 | 290.00 |
| GXL-06 Analog output interface for GP-L | | | 1 lb | 4910 | 360.00 |
| GXL-07 5m extension cable for GP-LS | | | 1 lb | 4911 | 430.00 |
| GXL-08 Ethernet interface for GP-LS | | | 1 lb | 4912 | 305.00 |
| GXL-27 Bluetooth interface for GP-LS | | | 1 lb | 4913 | 100.00 |

**GX-12001L**
**w/ swing arm display**

A&D WEIGHING DIVISION

## GP Industrial Balance

GP service parts only.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| **Service Parts** | | | | | |
| 06:4010649 leveling foot for GP | | | 1 lb | 5785 | $ 20.14 |
| PZ:3634 display board for GP | | | 1 lb | 5595 | 328.65 |

**GP-12K**
**w/ swing arm display**



Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

A&D WEIGHING DIVISION

## EK-L Precision Bench Scale

Ideal for use when large capacity and high resolution are required at the same time. The EK-15KL has 0.1 g readability across its full 15 kg capacity. The EK-30KL has a smart range function. This is especially useful when the gross weight exceeds 3 kg yet 0.1 g readability is needed to measure net weight when using heavy tare containers. A single press of the re-zero key restores the 0.1 g precision range up to 3 kg.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| EK-15KL | 15,000g x 0.01g | 12 lb | 5539 | $ 1,115.00 |
| EK-30KL | 3,000g x 0.1g<br>30,000g x 1g | 12 lb | 5540 | 1,125.00 |
| **Service Parts** | | | | |
| 07:4011266A adjustable foot | | 0.05 lb | 2986 | 10.60 |

**EK-L**

OHAUS®

## NV Navigator Industrial Balance

Two touchless sensors which free up your hands for handling samples and minimizing wear and tear on the keypad. 6 digit, 7 segment with white LED backlight or red LED. 4 mechanical keys, raised with tactile feedback. Weighing units for: gram, kilogram, pound, ounce (decimal or fractional), pound (decimal or fractional), ounce troy, grain, newton, carat, pennyweight, Hong Kong tael, Taiwan teal, Singapore teal, tical, tola. Application modes for: Weighing, Percent Weighing, Parts Counting, Check Weighing, Display Hold, Accumulate/Totalize. Over-accept-under LCD or LED annunciators. Front mounted level bubble with illumination. Adjustable leveling feet with skid resistant rubber pads. Full capacity by subtraction tare range. User selectable external span or linearity calibration, digital with external weight. 12VDC AC adapter included or (4) AA batteries (not included). 8.03"W x 8.34"D x 5.27"H.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| NV212 | 210g x 0.01g | 4.42" dia | 4 lb | 7802 | $ 398.00 |
| NV511 | 510g x 0.1g | 7.48" x 5.43" | 4 lb | 7803 | 273.00 |
| **Options** | | | | | |
| 80251930 RS232 Adapter | | | 1 lb | 7425 | 64.00 |
| 83032107 RS232 Interface w/ cable | | | 2 lb | 6162 | 262.00 |
| 83032108 USB Interface w/ cable | | | 2 lb | 6163 | 262.00 |

**Navigator XL Industrial Balance**

**NVT1601**
**Industrial Balance**

OHAUS®

## NVT Navigator Industrial Balance

Front mounted level bubble with illumination, adjustable leveling feet with skid resistant rubber pads. User selectable external span or linearity calibration with external weight. 6 digit, 7 segment with white LED backlight or red LED. Over/accept/under LCD or LED annunciators. 4 mechanical keys , raised and with tactile feedback plus 2 touchless sensors. Weighing units: gram, kilogram, pound, ounce (decimal or fractional), pound:ounce (decimal or fractional), ounce troy, grain, newton, carat, pennyweight, Hong Kong tael, Taiwan tael, Singapore tael, tical, tola. Applications modes: weighing, percent weighing, parts counting, check weighing, display hold, accumulate/totalize. User enabled auto power off after 5 minutes of inactivity. (4) C batteries not included or internal rechargeable lead acid battery (optional). 12VDCAC adapter, 240V, 50-60Hz.
9.4"W x 9.8"D x 2.75H

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| NVT3201 | 3,200g x 0.2g | 9" x 6.85" | 7 lb | 7669 | 538.00 |

OHAUS®

## EX Explorer Industrial Balance

Die cast metal base, stainless steel pan and thick metal housing. Explorer High Capacity is built to withstand daily wear and tear. 5.7" color VGA touch screen optimizes viewing and menu navigation. Two sensors on display offer hands free operation. The display can be separated from the base up to 1.5 meters in order to fit operational needs in almost any workspace. Weighing units: g, kg, ct, gn, lb, oz, ozt, N, dwt, hkt, sgt, twt, mom, tical, msg, tola, Custom Unit 1, Custom Unit 2, Custom Unit 3. Weighing applications: Weighing, Percent Weighing, Parts Counting, Check Weighing, Dynamic/Animal Weighing, Filling, Totalization, Formulation, Differential Determination, Peak Hold, Ingredient Costing, SQC. A 9 meter cable is also available when additional flexibility is needed. 2D Protection prevents shock and damage associated with movement and forces applied to the balance. Adjustable rolling feet provide assistance in easily moving the balance. IP54 protection guards balance and weighing cell from damage by dry particles, humidity and accidental spills/splashes (High Capacity models only). Rechargeable battery option provides 10 hours of operation away from a power source. Standard RS232, USB. 100-240 VAC. 17.4"W x 14.8"D x 4.72"H

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| EX12001 | 12,000g x 0.1g | 15" x 12" | 28 lb | 7344 | $ 5,852.00 |
| EX24001 | 24,000g x 0.1g | 15" x 12" | 28 lb | 7345 | 6,853.00 |
| EX35001 | 35,000g x 0.1g | 15" x 12" | 28 lb | 7346 | 8,048.00 |

**Explorer Industrial Balance**

aczel
Solution Simplified

## CY Industrial Balance

High contrast backlit LCD display. Applications: PCS, % Weighing, Animal weighing, Dynamic weighing, Check weighing, Density determination. External calibration. Overload protection. Power saving automatic shutoff. ABS housing, metal base and large stainless steel weighing pan. 100-240 VAC power adapter. RS232 output. 6.5"W x 11"D x 5"H.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| CY35001H | 35kg x 0.1g | 370mm x 260mm | 22 lb | 4295 | $ 1,730.00 |
| CY35001HC | 35kg x 0.1g | 370mm x 260mm | 28 lb | 4296 | 1,960.00 |

**CY Industrial Balance**

sartorius

## Signum Series Industrial Balance

Compact. Extremely rugged. Easy to operate. Perfectly adapts to any ambient conditions in an industrial environment. Space saving design. Choice of various resolutions. Washdown resistant and splashproof to IP65. Smart customization. Speed up technology. Custom tailored application package. Overload protection. Side impact protection. Flexible display mounting options.

**Level 1**: Weighing, (6) keys.

**Level 3**: Weighing, (17), keys, 0-9 numeric keypad, port for reference, counting, totalization, checkweighing, classification, product data memory, identifiers (4 x 40 characters), filling and counting to a target weight.

**Application Level 1**
**Industrial Scale**

**Application Level 3**
**Industrial Scale**

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| **Application Level 1** | | | | | |
| SIWADCP-V3 | 7kg x 0.1g | 13.7” x 9.4” | 30 lb | 7498 | $ 2,245.00 |
| SIWRDCP-V6 | 3kg x 0.1g | 13.7” x 9.4” | 30 lb | 7502 | 2,246.00 |
| SIWRDCP-V7 | 6kg x 0.2g | 13.7” x 9.4” | 30 lb | 7503 | 2,271.00 |
| SIWRDCP-V8 | 15kg x 0.5g | 13.7” x 9.4” | 30 lb | 7504 | 2,291.00 |
| SIWRDCP-V9 | 35kg x 1.0g | 13.7” x 9.4” | 30 lb | 7505 | 2,315.00 |
| SIWRDCP-V10 | 60kg x 2.0g | 13.7” x 9.4” | 30 lb | 7506 | 2,377.00 |
| **Application Level 3** | | | | | |
| SIWADCP-V4 | 7kg x 0.1g | 13.7” x 9.4” | 30 lb | 7499 | 2,875.00 |
| SIWADCP-V5 | 35kg x 0.5g | 13.7” x 9.4” | 30 lb | 7500 | 2,875.00 |
| SIWADCP-V6 | 65kg x 1.0g | 13.7” x 9.4” | 30 lb | 7501 | 2,875.00 |

**Flexible display**

## WLC Industrial balance

Stainless steel weighing platform. Backlit LCD display. Designed for fast and precise mass determination in laboratory and industrial conditions. WLC can be used in areas with no access to mains (230V), as their standard equipment they include internal rechargeable batteries. Applications for: Counting pieces, Checkweighing, Animal weighing, Percentage, Caps lock of max indication, Measurement in Newton. Loads are hung under the instrument, an alternative for weighing loads with non-standard dimensions and shapes. RS232 output. IP43. 230 VAC.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| **Fixed Display** | | | | | |
| WLC6/F1/R | 6kg x 0.1g | 11” x 14” | 18 lb | 7623 | $ 733.00 |
| WLC30/F1/R | 30kg x 0.5g | 11” x 14” | 18 lb | 7627 | 733.00 |
| WLC60/C2/R | 60kg x 1g | 15.7” x 19.6” | 40 lb | 7629 | 1,122.00 |
| **Detachable Display** | | | | | |
| WLC6/F1/K | 6kg x 0.1g | 11” x 14” | 18 lb | 7632 | 733.00 |
| WLC30/F1/K | 30kg x 0.5g | 11” x 14” | 18 lb | 7636 | 733.00 |
| WLC60/C2/K | 60kg x 1g | 15.7” x 19.6” | 40 lb | 7638 | 1,122.00 |

**WLC/R industrial balance**

## WLY Industrial balance

Simple operation and maximum automation of the weighing process. 5.7” color touch screen panel. Counting pieces, filling, animal weighing, check weighing, density determination, percentage, statistics, formulation. GLP procedures. Infrared proximity sensors. Detachable indicator. Data exchange through USB storage devices. Communication interfaces: Ethernet, (2) USB ports, RS232.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| WLY2/D2 | 2 kg x 0.01g | 7.7” dia | 8 lb | 7591 | 2,561.00 |
| WLY10/D2 | 10 kg x 0.1g | 7.7” dia | 8 lb | 7593 | 2,310.00 |
| WLY20/D2 | 20 kg x 0.1g | 7.7” dia | 8 lb | 7594 | 2,561.00 |

**WLY Industrial balance**

**BM-252**
**Analytical Balance**

A&D WEIGHING DIVISION

## BM Series Analytical Balance

Built in Direct Current (DC) fanless Ionizer. Clear, white backlit LCD. Interlockable slide doors. Large weighing chamber for improved usability. Built in environmental sensors. Weighing applications for: g, mg, oz, ozt, ct, mom, dwt, GN, tael, tola, PC (counting mode), percent mode. Density determination function. Data memory function can store up to 200 sets of weighing data. GLP/GMP/GCP/ISO compliant output. Motor driven internal calibration mass. Automatic response adjustment. RS-232C and Quick USB can be connected simultaneously to a balance. An external key plug for the optional foot switch is also provided. Overall dimensions 10"W x 18.3"D x 12.8"H.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| BM-5 | 5.2g x 0.001mg | 0.98" dia | 22 lb | 6450 | $ 15,680.00 |
| BM-5D | 2.1g x 0.001mg<br>5.2g x 0.01mg | 0.98" dia | 22 lb | 6451 | 14,010.00 |
| BM-20 | 22g x 0.001mg | 0.98" dia | 22 lb | 6485 | 16,765.00 |
| BM-22 | 5.1g x 0.001mg<br>22g x 0.01mg | 0.98" dia | 22 lb | 6486 | 16,140.00 |
| BM-252 | 250g x 0.01mg | 0.98" dia | 22 lb | 6487 | 6,750.00 |
| BM-200 | 200 x 0.1mg | 0.98" dia | 22 lb | 6488 | 4,975.00 |
| BM-300 | 320g x 0.1mg | 0.98" dia | 22 lb | 6489 | 5,625.00 |
| BM-500 | 520g x 0.1mg | 0.98" dia | 22 lb | 6490 | 6,655.00 |

## Shimadzu

Service parts only for Shimadzu

| Part Number | Weight | SKU | List |
|---|---|---|---|
| **Service Parts** | | | |
| BFL-321-51552-01, Small pan support | 1 lb | 82 | $ 21.50 |

A&D WEIGHING DIVISION

## MC-A / MC-M Mass Comparators

Easily visible backlit LCD. Innovative auto centering pan avoids corner load errors and ensures higher accuracy. Metrological weighing to meet ASTM Class 2-7 and OIML Class F1 and below. Automatic internal calibration. Data memory for up to 200 weighing values. Internal self assesment without weights based on Electronically Controlled Load (ECL). Industry leading 5 year warranty.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| MC-1104AS | 1,100g x 0.1mg | 5" x 5" | 5 lb | 6329 | $ 8,105.00 |
| MC-6203AS | 6,200g x 0.001g | 6.5" x 6.5" | 6 lb | 6330 | 8,350.00 |
| MC-10203MS | 10.2kg x 0.001g | 10.6" x 8.25" | 10 lb | 6331 | 9,995.00 |
| MC-32002MS | 32.2kg x 0.01g | 10.6" x 8.25" | 10 lb | 6332 | 9,995.00 |
| **Options** | | | | | |
| AD-1684A Electrostatic Fieldmaster | | | 1 lb | 6697 | 1,870.00 |
| AD-1688 Weighing data logger | | | 1 lb | 6698 | 415.00 |
| AD-1689 Tweezers for calibration weight | | | 1 lb | 6699 | 250.00 |
| KO:WW9-25 RS232C cable | | | 1 lb | 6700 | 65.00 |
| AX-USB-2920-25P USB to 25 pin RS232 | | | 1 lb | 6701 | 110.00 |
| AX-USB-2920-9P USB to 9 pin RS232 | | | 0.42 lb | 6744 | 75.00 |
| GX-13* Density determination kit | | | 1 lb | 4698 | 756.00 |
| AD-8922A Remote controller | | | 1 lb | 2234 | 813.75 |
| AD-1682 External rechargeable battery pack | | | 1 lb | 1682 | 915.00 |
| AD-1683 Static eliminator | | | 4 lb | 1248 | 1,517.25 |

**MC-A**
**Mass Comparator**



Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

**HR-A**
**Analytical Balance**

A&D WEIGHING DIVISION

## HR-AZ/HR-A Analytical Balance

Lean design for affordability. Clear, reverse backlit LCD. Large removable breeze break with antistatic coating. Weighing units: g, mg, oz, oz-t, ct, momme, dwt, grain, tael, tola, pcs (counting mode), percent, DS (density mode). GLP/GMP/GCP/ISO compliant output. Adjustable response characteristics and hold function. Statistical calculation function. Density determination kit. Rechargeable battery unit. 120 VAC 7.8"W x 11.6"D x 12.4"H

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| HR-100A | 102g x 0.1mg | 3.54" | 8 lb | 7722 | $ 2,200.00 |
| **Service Parts** | | | | | |
| 06:4005645 leveling foot | | | 0.03 lb | 1228 | 10.60 |

**FX**
**Analytical Balance**

A&D WEIGHING DIVISION

## FX Analytical Balance

External calibration. Large removable breeze break. Weighing units: g, mg, oz, oz-t, ct, momme, dwt, grain, pcs (counting mode), percent, DS (density mode). 120 VAC adapter. 7.8"W x 11.6"D x 12.4"H

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| FX-104 | 102g x 0.1mg | 3.54" | 7.7 lb | 2047 | $ 2,200.00 |
| FX-154 | 152g x 0.1mg | 3.54" | 7.7 lb | 2048 | 2,445.00 |
| FX-254 | 522g x 0.1mg | 3.54" | 7.7 lb | 2049 | 2,670.00 |

**FZ**
**Analytical Balance**

A&D WEIGHING DIVISION

## FZ Analytical Balance

Internal calibration. Large removable breeze break. Weighing units: g, mg, oz, oz-t, ct, momme, dwt, grain, pcs (counting mode), percent, DS (density mode). 120 VAC adapter. 7.8"W x 11.6"D x 12.4"H

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| FZ-104 | 102g x 0.1mg | 3.54" | 8.6 lb | 2050 | $ 2,740.00 |
| FZ-154 | 152g x 0.1mg | 3.54" | 8.6 lb | 2051 | 2,995.00 |
| FZ-254 | 522g x 0.1mg | 3.54" | 8.6 lb | 2052 | 3,195.00 |

A&D WEIGHING DIVISION

## GH Phoenix Analytical

Automatic or manual full digital calibration. Weighing units: gram, milligram, decimal ounce, troy ounce, pennyweight, carat, momme, grain, tola, tael, percentage & counting. 10" tall weighing chamber. GLP/LIMS/ISO compliant. 5 year warranty. 120VAC 50/60 HZ, 8.54"W x 17.4"D x 12.24"H

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| GH-120 | 120g x 0.1 mg | 3.6" dia | 18 lb | 5233 | $ 4,660.00 |
| GH-200 | 210g x 0.1 mg | 3.6" dia | 18 lb | 5234 | 5,275.00 |
| GH-300 | 310g x 0.1 mg | 3.6" dia | 18 lb | 5235 | 6,205.00 |
| GH-202 | 210g x 0.1g / 42g x 0.01mg | 3.6" dia | 18 lb | 5236 | 6,980.00 |
| GH-252 | 250g x 0.1g / 100g x 0.01mg | 3.6" dia | 18 lb | 5237 | 7,680.00 |
| **Options** | | | | | |
| AD-100-2 Anti-theft device | | | 1 lb | 1849 | 105.00 |
| AD-1653 Density determination kit | | | 1 lb | 2997 | 760.00 |
| AD-1682 Rechargeable battery pack | | | 5 lb | 1682 | 915.00 |
| AD-8920 Universal remote display | | | 3 lb | 1160 | 341.25 |
| AD-8922 Remote Controller | | | 1 lb | 2234 | 813.75 |
| AD-1683 Static eliminator | | | 4 lb | 1248 | 1,517.25 |
| TB: 636 AC adapter (120V)- standard with unit | | | 1 lb | 1304 | 50.00 |
| TB: 123 AC adapter (220V) | | | 1 lb | 1542 | 53.00 |
| **Service Parts** | | | | | |
| PZ:4365 switch board | | | 0.02 lb | 1614 | 85.86 |
| 06:4005645 leveling foot | | | 0.03 lb | 1228 | 10.60 |

**GH**
**Analytical Balance**





13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

**GR-202**
**Analytical Balance**

A&D WEIGHING DIVISION

## GR Analytical Balance

Service parts only for GR analytical balance

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| **Service Parts** | | | | | |
| PZ:3184 display board | | | 1 lb | 5472 | 86.10 |
| 08: 3003743-3 keysheet GR-120 | | | 1 lb | 5490 | 25.44 |
| AD-100-2 Anti-Theft Device | | | 1 lb | 1849 | 105.00 |
| TB:123 AC Adapter (220V) | | | 1 lb | 1542 | 53.00 |
| TB:636 Adapter 120VAC | | | 2 lb | 1304 | 50.00 |
| AD-1683 Static Eliminator | | | 4 lb | 1248 | 1,517.25 |
| 06:4005645 leveling foot | | | 0.03 lb | 1228 | 10.60 |

**AD-1683**
**Static Eliminator**

A&D WEIGHING DIVISION

## AD-1683 Static Eliminator

Compact, lightweight and does not require high voltage wiring which makes it easy to handle. DC type, this static eliminator has a remarkable ability for generating ions and can be used for the elimination of static charges from highly electrified weigh samples. Achieves static elimination with a high degree of efficiency regardless of the polarity or the potential of the charged object. A current limiting circuit is incorporated in the ion generating electrode to reduce the possibility of electric shock. Suited for static elimination in narrow and remote places because of its lengthy ion irradiation distance. The AD-1683 is a great compliment to our GH Semi micro balances. 240 VAC, 50/60 Hz.

| Part Number | Weight | SKU | List |
|---|---|---|---|
| AD-1683 Static Eliminator | 4 lb | 1248 | $ 1,517.25 |

OHAUS®

## AX Adventurer Analytical Balance

Color Touchscreen with wide viewing angle. Ingenious draftshield opens wide on both sides. Automatic internal calibration system that calibrates the balance daily. Real time clock with GLP/GMP data. Application modes for Weighing, Dynamic Weighing, Display Hold, Parts Counting, Density Determination, Totalization/Statistic, Percent Weighing, Check Weighing and Formulation. Weighing units for: gram, milligram, mesgal, Newton, ounce, pennyweight, baht, carat, grain, pound, Hong Kong tael, Singapore tael, Taiwan tael, tical, tola, ounce troy, 1 custom unit. RS232, (2)USB ports. 100-240 VAC adapter. 9.05"W x 13.93"D x 13.39"H. 2 year warranty.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| **Analytical, AutoCal.** | | | | | |
| AX124 | 120g x 0.0001g | 90mm dia | 18 lb | 8223 | $ 4,689.00 |
| AX224 | 220g x 0.0001g | 90mm dia | 18 lb | 8224 | 5,175.00 |
| AX324 | 320g x 0.0001g | 90mm dia | 18 lb | 8225 | 5,656.00 |
| **Analytical, External Calibration** | | | | | |
| AX124/E | 120g x 0.0001g | 90mm dia | 18 lb | 3961 | 3,869.00 |
| AX224/E | 220g x 0.0001g | 90mm dia | 18 lb | 3962 | 4,248.00 |
| **Options** | | | | | |
| 30064203 SF40A Dot Matrix printer, includes RS232 cable | | | 2 lb | 1754 | 1,552.00 |
| 80500525 Cable to IBM 9 pin serial | | | 1 lb | 3047 | 304.00 |
| 83021085 USB interface w/cable | | | 1 lb | 8234 | 304.00 |
| **Service Parts** | | | | | |
| 30111779 main board AX | | | 1 lb | 6527 | 672.00 |
| 30111768 keypad AX | | | 1 lb | 6528 | 63.00 |

**AX1502**
**Analytical Balance**



Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

**EX220**
**Analytical Balance**

OHAUS®

## EX Explorer Analytical Balance

Intelligent performance. Intuitive software. Ingenious draftshield. Practical touchless sensors. 5.7" full color VGA graphic display. Touch screen. Weighing applications for: Weighing, Percent Weighing, Check Weighing, Dynamic/Animal Weighing, Filling, Totalization, Formulation, Differential Weighing, Density Determination, Peak Hold, Ingredient Costing, Pipette Adjustment, SQC. Weighing units for: gram, milligram, kilogram, carat, ounce, ounce troy, pound, pennyweight, grain, newton, momme, mesghal, Hong Kong tael, Singapore tael, Taiwan tael, tical, tola, baht, 3 custom units. RS232, USB communication. 100-240 VAC adapter. 9.1"W x 15.5"D x 13.8"H. 2 year warranty.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| **Automatic Doors** | | | | | |
| EX124/AD | 120g x 0.1 mg | 3.5" dia | 22 lb | 7710 | $ 7,168.00 |
| EX224/AD | 220g x 0.1 mg | 3.5" dia | 22 lb | 7711 | 7,953.00 |
| EX324/AD | 320g x 0.1 mg | 3.5" dia | 22 lb | 7712 | 9,339.00 |
| **NTEP Legal for Trade 12-012 I/II Canada AM-5847** | | | | | |
| EX224N | 220g x 0.1mg | 3.5" dia | 22 lb | 7613 | 7,370.00 |
| EX324N | 320g x 0.1mg | 3.5" dia | 22 lb | 7614 | 8,628.00 |
| **Automatic Doors** | | | | | |
| EX224N/AD | 120g x 0.1 mg | 3.5" dia | 22 lb | 7714 | 8,260.00 |
| EX324N/AD | 120g x 0.1 mg | 3.5" dia | 22 lb | 7715 | 9,012.00 |

**Explorer**
**Semi Micro Balance**

OHAUS®

## EX Explorer Semi Micro Balance

Sophisticated professional weighing. Autocal uses 2 internal weights for linear calibration. Color touchscreen display. Touchless Auto doors on AD models. Ionizer to eliminate static electricity. Includes a built in weigh below hook. Weighing functions for: Standard weighing, counting, percent weighing, checkweighing, Dynamic weighing, filling, totalization, formulation, differential weighing, peak hold, density determination, pipette adjustment. Keys for: Touchscreen. Units are g, mg, kg, ct, oz, ozt, lb, dwt, N, mom, tical, msg, tola, baht, tael(3), ozt and custom unit(3). 15.5"L x 9.1"W x 13.8"H. 120 VAC.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| EX125D | 52gx0.01mg/120gx0.1mg | 90mm dia | 25 lb | 2563 | $ 8,126.00 |
| EX125 | 120gx0.01mg | 90mm dia | 25 lb | 2564 | 11,202.00 |
| **Automatic Doors** | | | | | |
| EX225D/AD | 120gx0.01mg/220gx0.1mg | 90mm dia | 27 lb | 2566 | 11,393.00 |
| EX225/AD | 220gx0.01mg | 90mm dia | 27 lb | 2567 | 13,990.00 |
| **Options** | | | | | |
| 30252145 Pipette adjustment kit | | | 4 lb | 2568 | 2,263.00 |
| 30064203 SF40A Dot Matrix printer, includes RS232 cable | | | 2 lb | 1754 | 1,552.00 |
| 80251932 Roll paper | | | 1 lb | 7427 | 34.00 |
| 80251933 Ink ribbon | | | 1 lb | 7428 | 91.00 |
| 80252571 RS232 Cable & adapter, Disc/Pion/MB | | | 1 lb | 7430 | 193.00 |
| 80253384 Density determination kit | | | 3 lb | 2794 | 1,219.00 |



Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp®
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

OHAUS®

## PR Analytical and Precision Balance

Economical balances for routine weighing applications. Model numbers with 'N' are NTEP Certified. ABS housing, stainless steel pan, glass draftshield on milligram models only, weigh below hook, security lock interface. Backlit liquid crystal display LCD. Weighing applications for: Basic Weighing, Parts Counting, Percent Weighing. Weighing units for: gram, milligram, kilogram, ounce, pound, carat, Troy ounce, grain. RS232, USB communication. 100-240 VAC adapter (included), 20"W x 15"D x 21"H w/draftshield, 21.5"W x 15"D x 11.5"H, . 2 year warranty.
NTEP Legal for Trade

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| PR64/E | 62g x 0.1mg | 4.72" dia | 15.4 lb | 5341 | $ 2,058.00 |
| PR124 * | 120g x 0.1mg | 4.72" dia | 15.4 lb | 5342 | 2,673.00 |
| PR124/E | 120g x 0.1mg | 4.72" dia | 15.4 lb | 5343 | 2,372.00 |
| PR224 * | 220g x 0.1mg | 4.72" dia | 15.4 lb | 5344 | 2,962.00 |
| PR224/E | 220g x 0.1mg | 4.72" dia | 15.4 lb | 5345 | 2,636.00 |
| PR223/E | 220g x 1mg | 4.72" dia | 15.4 lb | 5346 | 1,305.00 |
| PR523/E | 520g x 1mg | 4.72" dia | 15.4 lb | 5347 | 1,557.00 |
| PR1602/E | 1,600g x 0.01g | 7.09" dia | 11.0 lb | 5348 | 1,204.00 |
| PR2202/E | 2,200g x 0.01g | 7.09" dia | 11.0 lb | 5349 | 1,372.00 |
| PR4202/E | 4,200g x 0.01g | 7.09" dia | 11.0 lb | 5350 | 1,640.00 |
| PR2201/E | 2,200g x 0.1g | 7.09" dia | 11.0 lb | 5351 | 1,071.00 |
| PR4201/E | 4,200g x 0.1g | 7.09" dia | 11.0 lb | 5352 | 1,238.00 |
| **NTEP Legal for Trade 18-110** | | | | | |
| PR323N/E | 320g x 0.01g | 4.72" dia | 15.4 lb | 4244 | 1,593.00 |
| PR523N/E | 520g x 0.01g | 4.72" dia | 15.4 lb | 4245 | 2,030.00 |
| PP523N * | 520g x 0.01g | 4.72" dia | 15.4 lb | 4246 | 2,352.00 |
| PR322N/E | 320g x 0.01g | 4.72" dia | 15.4 lb | 4247 | 1,606.00 |
| PR522N/E | 520g x 0.01g | 4.72" dia | 15.4 lb | 4248 | 2,036.00 |
| PR822N/E | 820g x 0.1g | 7.09" dia | 11.0 lb | 4249 | 1,312.00 |
| PR2202N/E | 2,200g x 0.1g | 7.09" dia | 11.0 lb | 4250 | 1,460.00 |
| PR5202N/E | 5,200g x 0.1g | 7.09" dia | 11.0 lb | 4251 | 2,036.00 |
| PR2201N/E | 2,200g x 0.1g | 7.09" dia | 11.0 lb | 4252 | 1,499.00 |
| PR5201N/E | 5,200g x 0.1g | 7.09" dia | 11.0 lb | 4253 | 1,546.00 |
| PR6201N/E | 6,200g x 1g | 7.09" dia | 11.0 lb | 4254 | 1,633.00 |

* Internal calibration

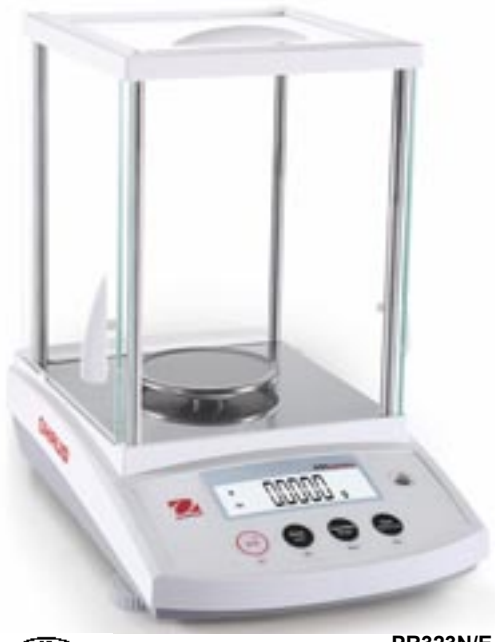

**PR323N/E**
**Analytical Balance**

**PR822N/E**
**Analytical Balance**

**PX124**
**Analytical Balance**

OHAUS

## PX Pioneer Analytical Balance

Metal base, plastic top housing, removable stainless steel pan, Glass draftshield, integrated weigh-below hook, security bracket, calibration locl and in-use cover. Backlit liquid crystal display LCD. Weighing applications for: Basic Weighing, Parts Counting, Percent Weighing, Animal Weighing, Density Determination. Weighing units for: gram, milligram, kilogram, ounce, pound, carat, pennyweight, Troy ounce, grain, newton, momme, mesghal, Hong Kong tael, Singapore tael, Taiwan tael, tical, tola, baht, 1 custom unit. RS232, USB communication. 100-240 VAC adapter (included), 21.7"W x 15.2"D x 11.5"H. 2 year warranty.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| PX84/E | 82g x 0.1mg | 3.54" dia | 15.4 lb | 3663 | $ 2,540.00 |
| PX124/E | 120g x 0.1mg | 3.54" dia | 15.4 lb | 3664 | 2,931.00 |
| PX224/E | 220g x 0.1mg | 3.54" dia | 15.4 lb | 3665 | 3,254.00 |
| **Internal Calibration** | | | | | |
| PX84 | 82g x 0.1 mg | 3.54" dia | 15.4 lb | 3657 | 2,962.00 |
| PX124 | 120g x 0.1 mg | 3.54" dia | 15.4 lb | 3658 | 3,393.00 |
| PX224 | 220g x 0.1 mg | 3.54" dia | 15.4 lb | 3659 | 3,730.00 |

**PX85**
**Semi-Micro Balance**

OHAUS

## PX Pioneer Semi Micro Balance

Metal base, plastic top housing, removable stainless steel pan, Glass draftshield, integrated weigh-below hook, security bracket, calibration locl and in-use cover. Backlit liquid crystal display LCD. Weighing applications for: Basic Weighing, Parts Counting, Percent Weighing, Animal Weighing, Density Determination. Weighing units for: gram, milligram, kilogram, ounce, pound, carat, pennyweight, Troy ounce, grain, newton, momme, mesghal, Hong Kong tael, Singapore tael, Taiwan tael, tical, tola, baht, 1 custom unit. RS232, USB communication. 100-240 VAC adapter (included), 21.7"W x 15.2"D x 11.5"H. 2 year warranty.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| PX85 | 82g x 0.01mg | 3.15" dia | 11 lb | 3655 | $ 6,263.00 |
| PX225D | 82g x 0.01mg<br>220g x 0.1mg | 3.15" dia | 11 lb | 3656 | 7,256.00 |



Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

sartorius

## Secura Analytical Balance

Easy, reliable weighing in regulated areas. The new operating concept of Secura® will noticeably ease your daily workload during weighing and, its APC function – Advanced Pharma Compliance – will relieve you from tedious and time-consuming documentation and monitoring tasks. Touch screen with Sartorius graphical user interface optimized for users in pharmaceutical laboratories always correctly leveled with Sartorius LevelControl. Special lab applications such as Mixing, Components, Statistics and Conversion; plus standard lab applications such as Weighing, Density, Percentage, Checkweighing, Peak Hold, Counting and Unstable Conditions. Regulatory Compliance with expert support. Intelligent, optoelectronic level sensor with alarm function and interactive user guidance for reliable and safe leveling.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| SECURA224-1S | 220 g x 0.1 mg | 3.5” | 12 lb | 7150 | $ 4,930.00 |
| SECURA124-1S | 120 g x 0.1 mg | 3.5” | 12 lb | 7154 | 4,450.00 |
| SECURA513-1S | 510 g x 1 mg | 3.5” | 12 lb | 7155 | 3,710.00 |
| SECURA313-1S | 310 g x 1 mg | 3.5” | 12 lb | 7156 | 2,960.00 |
| SECURA213-1S | 210 g x 1 mg | 3.5” | 12 lb | 7157 | 2,720.00 |
| SECURA5102-1S | 5100g x 10 mg | 7” | 12 lb | 7158 | 3,840.00 |
| SECURA3102-1S | 3100 g x 10 mg | 7” | 12 lb | 7159 | 3,340.00 |
| SECURA2102-1S | 2100 g x 10 mg | 7” | 12 lb | 7160 | 3,080.00 |
| SECURA1102-1S | 1100 g x 10 mg | 7” | 12 lb | 7161 | 2,590.00 |
| **Options** | | | | | |
| YDP-20 OCE Printer | | | 3 lb | 7286 | 1,190.00 |
| YDP-40 Standard printer | | | 3 lb | 7287 | 950.00 |
| YRB11Z Battery kit | | | 2 lb | 7288 | 610.00 |
| YCC04-D09 USB Data cable | | | 1 lb | 7289 | 57.00 |
| YCC03-D09 USB /RS232 cable | | | 1 lb | 7290 | 57.00 |
| **Service Parts** | | | | | |
| 69SE0056 lateral slide, right | | | 0.73 lb | 7284 | 565.00 |
| 69SE0057 lateral slide, left | | | 0.73 lb | 7285 | 565.00 |

**SECURA124**

**SECURA2103**

**SECURA2102**

**SECURA1102-1S w/ Printer**



Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

**Quintix-513-1S**
**Analytical**

## Quintix Analytical Balance

Service parts only.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| **Service Parts** | | | | | |
| YEPS01-PS4 adapter 100-240vac to 12vdc | | | 0.39 lb | 3055 | $ 75.00 |

**Quintix-3102-1S**
**Analytical**

**CY224**
**Analytical Balance**

## CY224 Aczet Analytical Balance

Analytical balance with large LCD backlit screen. CY224C has motorized internal calibration. CY224 uses external calibration weights. Units: g, mg, ct, GN, mo, oz, dwt, t1T, t1H, t1S, mom, Bat, MS. Applications: PCS, % Weighing, Custom unit, Animal weighing, Check weighing, Density determination, Formulation. Output via RS232 and USB-B. 342.5mm L x 212mm W x 341mm H. Chamber height 228.5mm. 115 VAC.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| CY224 | 220g x 0.1mg | 90mm dia | 18 lb | 4293 | $ 1,020.00 |
| CY224C | 220g x 0.1mg | 90mm dia | 18 lb | 4294 | $ 1,060.00 |

Totalcomp

## TJA Analytical Balance

Electronic analytical balance ideal for laboratory weighing. Easy to see in low light conditions 9 digit LCD display with backlight. Stainless steel weighing pan 3.15" dia. Sensitivity and speed are separately adjustable in 4 steps from low to high. Countiuous output RS232 via 9 pin connector for remote display or computer input. Below balance weighing for specific gravity determination. Weighing functions for: Standard weighing and counting. Keys for: OFF, PRINT, O/T, CAL, ON. Units are g, mg, ct, oz. Glass breeze break with top and side doors allow for quick placement of item to be weighed. CAL button and 200g calibration weight allow for easy recalibration of balance. Rear bubble level and two adjustable feet allow for quick leveling. 13.4"L x 8..5"W x 13.8"H. 120 VAC.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| TJA-203 | 200g x 0.001g | 3.15” dia | 17 lb | 5966 | $ 679.00 |

**TJA-203**
**Analytical Balance**

aczel
Solution Simplified

## AXR Aczet Micro Balance

Microbalance with color TFT touchscreen. Motorized internal calibration. Units: g, mg, ct, GN, mo, dwt, t1T, t1H, t1S, mom, Bat, MS. Applications: PCS, % Weighing, Animal weighing, Dynamic weighing, Check weighing, Density determination, Formulation. Output via RS232 USB and ethernet. Mechanical 360mm L x 140mm W x 146mm H. Electronic 240mm W x 210mm D x 65mm H. 115 VAC.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| AXR5MA | 5.1g x 1ug | 30mm dia | 22 lb | 4291 | $ 11,220.00 |

**AXR5MA**
**Micro Balance**

# Mechanical Portion

**Benchmark**

Penn Scale Manufacturing Company Inc.
Scales and Scoops

## Heirloom Scale

Durable. Rugged accuracy. Powder coated finishes in a variety of designer colors. Made of cast iron with case hardened steel pivots and bearings, and a polished brass 1lb beam in 1/4 ounce increments. The scales come in black, white, blue, pink, red, green, yellow, silver and copper vein.

**Benchmark**: This indispensible kitchen tool features (2) 6" cold rolled steel plates, a polished brass 1 lb beam in 1/4 ounce increments and (3) free-weights (2) 1lb and (1) 2 lb.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| 1704B Benchmark | 5 lb x 1 oz | 16 lb | 7597 | $ 451.67 |

DETECTO
A Division of Cardinal Scale Manufacturing Co.

**1002TB**
**Portion Control Scale**

## TB Portion Control Baker's Dough Scale

Rugged, accurate, even-balance scale. Specially designed seamless white plastic commodity scoop. Includes counterweight and 9" dia plates. Finished in durable USDA approved white oven baked enamel.
Models 1051 & 1052 are stainless steel construction for the base, plates and poise weights. Beam is chrome plated. Mechanism is epoxy coated.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| 1001TB w/scoop | 16 lb x 1/4 oz | 38 lb | 5981 | $ 987.00 |
| 1001TBNS w/o scoop | 16 lb x 1/4 oz | 38 lb | 5982 | 957.00 |
| 1001TBKG w/scoop | 8kg x 5g | 38 lb | 5983 | 1,049.00 |
| 1002TB w/scoop | 8 lb x 1/4 oz | 30 lb | 5984 | 865.00 |
| 1002TBNS w/o scoop | 8 lb x 1/4 oz | 30 lb | 5985 | 803.00 |
| 1002TBKG w/scoop | 5kg x 5g | 30 lb | 5986 | 865.00 |
| **Stainless Steel** | | | | |
| 1051TBS w/scoop | 16 lb x 1/4 oz | 38 lb | 5987 | 1,242.00 |
| 1052TBS w/scoop | 8 lb x 1/4 oz | 30 lb | 5988 | 1,178.00 |
| **Options** | | | | |
| 1WP1-1 flat weight | 1 lb | 2 lb | 5989 | 55.00 |
| 1WP2-1 flat weight | 2 lb | 3 lb | 5990 | 78.00 |
| 1WP4-1 flat weight | 4 lb | 5 lb | 5991 | 90.00 |
| 1WP8-1 flat weight | 8 lb | 9 lb | 5992 | 119.00 |
| 6100-0001 Scoop white plastic w/spout 10"x2.5"H | | 4 lb | 5994 | 88.25 |
| 6100-0002 Scoop white plastic w/spout 21"x12"x5.75"H | | 4 lb | 5995 | 127.75 |
| 6100-0003 Bowl SS w/o spout 6.25"x2.25"H | | 3 lb | 5996 | 89.25 |

Penn Scale Manufacturing Company Inc.
Scales and Scoops

## P Spring Dial Scale

The PSpring Dial Scale has an air damping dashpot that eliminates the bounce and provides a quick and accurate measurement everytime. Heavy gauge stainless steel housing. Heavy duty top loading mechanical spring scale. Large stainless steel platter. Dual easy to read dial in lb's and oz's, kg's and grams. Angled dial design for easy reading. Fine zero adjustment to ensure accuracy. Perfect for portioning and receiving.

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| P-5 Spring scale | 5 lb x 1/2 oz | 8" x 8" | 8 lb | 7601 | $ 63.47 |
| P-10 Spring scale | 10 lb x 1 oz | 8" x 8" | 8 lb | 7602 | 63.47 |

**P-2**
**Portion Mechanical Scale**





13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

**FS**
**Spring Dial Scale**

CCi SCALE COMPANY, INC.

## FS Spring Dial Scale

Heavy duty Industrial scales with high precision temperature compensated springs and reinforced dual spring level mechanism. Double beveled base plate and heavy duty sub assembly combine to give you durability you can count on. Lb/Kg dial face for dual reading is signified by DR at the end of the model number.

| Part Number | Platform | Capacity | Weight | SKU | List |
|---|---|---|---|---|---|
| **FS Series** 6" dial face w/SS platform 5-1/2"W x 7-3/8"D x 7-3/4"H | | | | | |
| FS3214-DR | 5.75" x 5.75" | 32 oz x 1/4 oz | 4 lb | 3837 | $ 70.00 |
| FS0512-DR | 5.75" x 5.75" | 5 lb x 1/2 oz | 4 lb | 3838 | 75.00 |
| **FS Options** | | | | | |
| Rotating dial (Tare feature) | | | 1 lb | 3839 | 4.41 |

**LCD**
**Spring Dial Scale**

| | | | | | |
|---|---|---|---|---|---|
| **LCD Series** 8" dial face w/SS platform 6-3/4"W x 9-3/4"D x 10-3/4"H | | | | | |
| LCD3218-DR | 9" x 9" | 32 oz x 1/8 oz | 9 lb | 3841 | 95.00 |
| **Option** for LCD 3218 only | | | | | |
| Rotating dial OVER/UNDER | | | 1 lb | 3858 | 25.00 |
| LCD0512-DR | 9" x 9" | 5 lb x 1/2 oz | 9 lb | 3842 | 90.00 |
| LCD1001-DR | 9" x 9" | 10 lb x 1 oz | 9 lb | 3843 | 90.00 |
| LCD2001-DR | 9" x 9" | 20 lb x 1 oz | 10 lb | 3844 | 90.00 |
| LCD2501 * | 9" x 9" | 25 lb x 1 oz | 10 lb | 3846 | 95.00 |
| * Not available as dual reading | | | | | |
| LCD2502-DR | 9" x 9" | 25 lb x 2 oz | 10 lb | 3847 | 95.00 |
| LCD4002-DR | 9" x 9" | 40 lb x 2 oz | 10 lb | 3848 | 100.00 |
| LCD5002-DR | 9" x 9" | 50 lb x 2 oz | 12 lb | 3849 | 105.00 |
| LCD7004-DR w/Chrome platform | 10" x 10" | 70 lb x 4 oz | 13 lb | 3850 | 125.00 |
| **LCD Options** | | | | | |
| Air dash pot (quick stop) | | | 1 lb | 3851 | 70.00 |
| Stainless steel construction | | | 1 lb | 3852 | 85.00 |
| Produce pan 10"dia stainless steel | | | 1 lb | 3853 | 96.00 |

**HCD**
**Spring Dial Scale**

| | | | | | |
|---|---|---|---|---|---|
| **HCD Series** 10" dial face w/chrome platform 10-1/2"W x 14"D x 12-1/2"H | | | | | |
| HCD7004-DR | 13" x 13" | 70 lb x 4 oz | 24 lb | 3855 | 212.00 |
| HCD10004-DR | 13" x 13" | 100 lb x 4 oz | 27 lb | 3856 | 217.00 |
| HCD20008 -DR | 13" x 13" | 200 lb x 8 oz | 30 lb | 3857 | 266.00 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

OHAUS®

## Triple Beam Balance

Triple Beam 700 and 800 Series Balances. Tiered notched beams. Choice of weighing platforms, scoop, animal container or pans. Magnetic damping. Optional tare beam. Equipped for specific gravity weighings. 5 Year warranty

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| 710-00 | 610g x 0.1g | SS Pan, 6" dia | 7 lb | 1523 | $ 433.00 |
| 710-T0 | 610g x 0.1g | SS Pan, tare | 7 lb | 1528 | 541.00 |
| 720-00 | 610g x 0.1g | Poly scoop | 7 lb | 1524 | 518.00 |
| 720-S0 | 610g x 0.1g | SS scoop | 7 lb | 1525 | 602.00 |
| 730-00 | 610g x 0.1g | Animal container | 9 lb | 1526 | 651.00 |
| 750-S0 | 610g x 0.1g | SS Plate, 6" dia | 8lb | 1521 | 246.00 |
| 760-00 | 610g x 0.1g | SS Plate, tare | 8 lb | 1527 | 457.00 |
| **Options** | | | | | |
| **With counterweight** | | | | | |
| 80780015 | Stainless Steel Scoop 12" x 6" x 2-34" footed and counterweight | | 2 lb | 2023 | 206.00 |
| 80780016 | Polypropylene Maxi-Scoop 10" dia x 1-12" | | 3 lb | 2024 | 59.00 |
| **Without counterweight** | | | | | |
| 80250400 | Stainless Steel Scoop 12" x 6" x 2-3/4" footed, tare 190g | | 2 lb | 2025 | 118.00 |

**710-00 SS pan w/optional attachment weights**

**720-00 SS Scoop**

**730-00 Animal Container**

**750-SO SS plate**

OHAUS®

## Triple Beam Junior

All the benefits of a Triple Beam, just for younger students. Notched and tiered beams. Magnetic damping. Zero adjust compensator. Metal base and beam, stainless steel pan. 5 Year warranty

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| TJ611 | 610g x 0.1g | SS Pan, 5.9" dia | 6 lb | 1612 | $ 232.00 |

**TJ611**
**Triple Beam Junior**



Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

**2400-12**
**Field Test Scale**

OHAUS®

## Field Test Scale

The heavy duty Multi purpose field scale is for use in laboratory, production facilities or field testing locations. The beam reads 1 lb by 0.01 lb divisions. The numbers and graduations are in black on a white background for maximum legibility. The scale has a sliding poise designed to eliminate reading errors. A set of slotted weights is supplied with the scale and they store in the cast metal base. For ease in moving the scale, a carrying handle is an integral part of the base. 5 year warranty. 22-1/4" x 9-3/4" x 10-1/8"H.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| 2400-12 | 36 lb x 0.01 lb | 9-3/4" dia | 23 lb | 1396 | $ 2,043.00 |

OHAUS®

## 311 Cent-O-Gram® Balance
## 310 Dial-O-Gram® Balance

These balances povide 0.01 g sensitivity and come with all the built in extras that are expected from Ohaus. The Dial-O-Gram® has the fastest results which are read on the precision engraved dial. Poises are windowed for easy reading. Built in specific gravity platform. Four notched and tiered beams on 311 Model. 10 gram vernier dial on 310 Model. Rugged, durable construction. 5 Year warranty.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| **Dial-O-Gram** | | | | |
| 310-00 | 310g x 0.01g<br>Dial and vernier 10g x 0.01g<br>Front beam 100g x 10g<br>Rear beam 200g x 100g | 6 lb | 1530 | $ 642.00 |
| **Cent-O-Gram** | | | | |
| 311-00 | 311g x 0.01g<br>Front beam 1g x 0.01g<br>Second beam 10g x 1g<br>Third beam 100 x 10g<br>Rear beam 200 x 100g | 6 lb | 1531 | 530.00 |

**311-00**
**Cent-O-Gram**
**Balance**

OHAUS®

## Triple Pro Balance

Accurate, dependable and truly best in class. Triple Pro offers the convenience of a toploading balance while allowing hands on experience through manipulation of the poises. Easy grip carrying handle is perfectly balanced for effortless movement. Convenient storage compartment for included attachment weight set. Two security features included to prevent theft, a security loop and Kensington lock (cables sold seperately). Includes includes weight set and rod & clamp assembly for specific gravity determinations. 10 Year limited warranty

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| TP2611 | 2,610 x 0.1g | 5.8” dia | 9 lb | 1536 | $ 351.00 |

**TP2611**
**w/optional attachment weights**

OHAUS®

## 1600 Dial-O-Gram® Balance

Direct reading vernier dial. Tare poise slides for coarse tare, rotates for fine adjustments. Maximum capacity of 2610 g with optional accessory weights. 5 Year warranty

| Part Number | Capacity | Tare | Platf/9rm | Weight | SKU | List |
|---|---|---|---|---|---|---|
| 1610-00 | 610g x 0.1g | 225 g | SS Pan, 6” dia | 8 lb | 1543 | $ 657.00 |
| 1650-00 | 610g x 0.1g | ------ | SS Plate, 6” dia | 8 lb | 1541 | 557.00 |
| 1650-W0 | 2,610g x 0.1g | ------ | SS Plate w/att wts | 11 lb | 1537 | 657.00 |

**Options**

| | | | | |
|---|---|---|---|---|
| 80780017 Vinyl cover for Triple Beam | 1 lb | 96 | 45.00 |
| 80780108 Attachment weights, metric, 2.5 kg set | 2 lb | 877 | 116.00 |
| 701-00 Attachment weight, 500 g | 1 lb | 1532 | 16.00 |

The Attachment weights allow full utilization of the Triple Beam’s capacity (2610g) by suspending weights from pivots on beam end. Requires (2)1,000g and (1)500g weights. Conveniently store in base of balance.

**1650-00 SS Plate**



**Tare Feature**

**1550-SD**
**Harvard Trip Balance**

OHAUS®

## Harvard Trip Balance

Beam and dial models available. Easy, reliable operation. Two pan balances of this type are commonly used for comparative weighing - to determine the difference in mass between two objects rather than the absolute value. The built in sliding masses (up to 10 or 210g) are usually suitable for this purpose, but weighings up to 2kg can be achieved by using a suitable set of calibrated masses. Magnetic damping. 0.1g sensitivity. 5 Year warranty

| Part Number | Capacity | Beam/platform | Weight | SKU | List |
|---|---|---|---|---|---|
| 1450-SD | 2,000g x 0.1g | Single beam/Plate | 7 lb | 1825 | $ 594.00 |
| 1550-SD | 2,000g x 0.1g | Double beam/Plate | 8 lb | 1828 | 618.00 |
| 1560-SD | 2,000g x 0.1g | Dbl bm/Plate w/Tare | 10 lb | 1829 | 662.00 |

**SB1200**
**School balance**

OHAUS®

## School Balance

The young scientist's first balance. Large, washable pans provide optimal space for samples to be weighed. An 18 piece weight set (10)1g, (4)5g, (2)10g, (2)25g, color coded stackable plastic mass set included. Front and rear pointers allow students to view results from both sides of the balance. Plastic pointer. ABS base, beam and pans. Zero adjust compensator.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| SB1200 | 2,000g x 0.5g | 5.5"x5.5" | 7 lb | 1822 | $ 107.00 |

**90410-00**
**Primer balance**

OHAUS®

## Primer Balance

An activity guide with 16 excercises is included with every Primer balance. The easy to slide zero adjustment weight makes ensuring the balance is ready for weighing very simkple. Front and rear pointers allow students to view results from both sides of the balance. Plastic pointer. ABS base, beam and pans. Large, washable weighing pans, dual pointers, An 18 piece weight set (10)1g, (4)5g, (2)10g, (2)25g, color coded stackable plastic mass set included.

| Part Number | Capacity | Pan | Weight | SKU | List |
|---|---|---|---|---|---|
| 80410-00 | 2,000g x 1g | 4"x4" | 2 lb | 1830 | $ 76.00 |

OHAUS®

## Pull type spring scales

Pull type spring scales feature an internal spring mechanism and offer a versatile and inexpensive way to display measurements in grams, ounces, pounds and Newtons. Demonstration spring scales offer a large faceplate for easy viewing and are ideal for all basic weighing applications. ABS housing with metal face plate, pointer, spring and hook. Large bright colored face, easy to read graduations on a frosted aluminum background.

| Part Number | Capacity | Capacity | Weight | SKU | List |
|---|---|---|---|---|---|
| 8001-MA | 9 oz x 0.25 oz | 250g x 10g | 0.4 lb | 7880 | $ 41.00 |
| 8002-MA | 19 oz x 0.5 oz | 500g x 20g | 0.4 lb | 7881 | 41.00 |
| 8004-MA | 72 oz x 2 oz | 2,000g x 50g | 0.4 lb | 7882 | 41.00 |
| 8001-MN | 250g x 10g | 2.5N x 0.1N | 0.4 lb | 7883 | 38.00 |
| 8002-MN | 500g x 20g | 5N x 0.2N | 0.4 lb | 7884 | 38.00 |
| 8003-MN | 1,000g x 25g | 10N x 0.25N | 0.4 lb | 7885 | 38.00 |
| 8004-MN | 2,000g x 50g | 20N x 0.5N | 0.4 lb | 7886 | 38.00 |
| 8008-MN | 5,000g x 100g | 50N x 1N | 0.4 lb | 7887 | 38.00 |
| 8261-M0 | 100g x 1g | | 0.4 lb | 7888 | 44.00 |
| 8262-M0 | 200g x 2g | | 0.4 lb | 7889 | 44.00 |
| 8263-M0 | 500g x 5g | | 0.4 lb | 7890 | 44.00 |
| 8264-M0 | 1,000g x 10g | | 0.4 lb | 7891 | 44.00 |
| 8265-M0 | 2,000g x 20g | | 0.4 lb | 7892 | 44.00 |
| 8001-PN | 0.56 lb x 0.02 lb | 2.5N x 0.1N | 0.4 lb | 7893 | 44.00 |
| 8002-PN | 1.12 lb x 0.04 lb | 5N x 0.2N | 0.4 lb | 7894 | 44.00 |
| 8003-PN | 2.25 lb x 0.05 lb | 10N x 0.25N | 0.4 lb | 7895 | 44.00 |
| 8004-PN | 4.5 lb x 0.125 lb | 20N x 0.5N | 0.4 lb | 7896 | 44.00 |
| 8008-PN | 11.25 lb x 0.25 lb | 50N x 1N | 0.4 lb | 7897 | 44.00 |

**8001-MA**
**Pull type spring scales**

OHAUS®

## Dial type spring scales

Dial type spring scales offer a versatile and inexpensive weight determinationin classroms, laboratories, field studies and much more. Measurements in grams, ounces, pounds and Newtons. Demonstration spring scales offer a large faceplate for easy viewing and are ideal for all basic weighing applications. ABS housing with metal face plate, pointer, spring and hook. Large bright colored dial face, easy to read graduations on a frosted aluminum background.

| Part Number | Capacity | Capacity | Weight | SKU | List |
|---|---|---|---|---|---|
| 8011-MA | 9 oz x 0.125 oz | 250g x 2g | 0.4 lb | 3013 | $ 63.00 |
| 8012-MA | 18 oz x 0.25 oz | 500g x 5g | 0.4 lb | 3014 | 63.00 |
| 8014-MA | 2,000g x 20g | 72oz x 0.5oz | 0.4 lb | 3015 | 63.00 |
| 8011-MN | 250g x 2g | 2.5N x 0.02N | 0.4 lb | 3016 | 63.00 |
| 8012-MN | 500g x 5g | 5N x 0.05N | 0.4 lb | 3017 | 63.00 |
| 8014-MN | 2,000g x 20g | 20N x 0.2N | 0.4 lb | 3018 | 63.00 |
| 8013-MN | 1,000g x 10g | 10N x 0.1N | 0.4 lb | 3019 | 63.00 |
| 8016-00 | 20N x 1/2N | | 0.4 lb | 3020 | 117.00 |
| 8015-00 | 22hg x 1/2hg | | 0.4 lb | 3021 | 117.00 |
| 8018-50 | 50N x 2N | | 0.4 lb | 3022 | 128.00 |

**8011-MA**
**Dial type spring scales**

**854F100P**
**Beam Scale**
**mechanical portable**

DETECTO
A Division of Cardinal Scale Manufacturing Co.

## Mechanical Portable Beam Scale

Portable, durable accurate trouble free performance. Rust proof die cast beam is calibrated 100 lb x 1/2 lb on both front and back. Counterpoise weights are stored on a handy hanger. Easy to read lockable poise. Simplified lever system of fabricated steel for longer life and accuracy. Platform size 19"W x 28"D. Overall size 24"W x 35"D x 45"H. FOB Webb City, MO.
NTEP Legal for Trade 88-106/107

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| 854F100P portable | 1,000 lb x 1/2 lb | 132 lb | 4037 | $ 1,260.00 |




www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

## Mechanical Portable Beam Scale

A Fairbanks classic. Rugged and economical. Large platform. Sturdy cast iron base, lever system, platform and wheels. Large easy-to-read graduations on a chrome plated beam with a brass insert. Open face poise with pointer clearly shows the exact weight. A set screw holds the poise firmly in place when set. Dimensions 21"W x 36"D x 42.75"H.
FOB Meridian, MS
Canadian AM-4657
NTEP Legal for Trade 88-266

| Part Number | Capacity | Platform | Weight | SKU | List |
|---|---|---|---|---|---|
| 1124 beam scale | 1,000 x 0.5 lb | 24" x 17" | 185 lb | 6065 | $ 1,144.00 |

**Service Parts**

| | | | |
|---|---|---|---|
| 95843 beam assy US standard for 1124 | 4 lb | 6110 | 156.00 |
| 71596 set of counterpoise weights lbs for 1124 | 11 lb | 6111 | 147.54 |
| 58935 cup hanger counterpoise for 1124 | 2 lb | 6178 | 70.33 |

**1124**
**Beam Scale**
**Mechanical Portable**





13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp

**TSCP-431**
**White plastic scoop**

**ST-64P**
**Sample pan, plastic, triangular**

**Aluminum scoop, large**

**TSCP-431-SS Scoop**
**Large**
**Stainless steel**

## Scoops

For use with any balance or scale.

| Part Number | Size | Weight | SKU | List |
|---|---|---|---|---|
| **Plastic** | | | | |
| TSCP-431 scoop, anti static white plastic, FDA approved | 21.5”x11.5”x5.5” w/6” dia foot | 2 lb | 2379 | $ 66.00 |
| ST-64P Sample pan, anti static plastic, triangular | 11”x10.5”x2.5” | 2 lb | 6109 | 20.40 |
| **Aluminum** | | | | |
| Aluminum scoop, medium | 17” x 12” x 5” | 2 lb | 4220 | 185.00 |
| Aluminum scoop, large | 20.5” x 14” x 6” | 3 lb | 4221 | 194.00 |
| **Stainless steel** | | | | |
| TSCP-441-SS scoop, large | 12” x 22” x 5.5” | 5 lb | 6671 | 166.66 |

OHAUS®

## Scoops

For use with any balance.

| Part Number | Size | Weight | SKU | List |
|---|---|---|---|---|
| 80250048 Black aluminum scoop | 4” x 3.5” | 1 lb | 1139 | $ 63.00 |
| 30020842 Gold scoop | 3” x 2.25” | 1 lb | 1141 | 56.00 |
| 80250400 Stainless Steel Scoop footed, tare 190g | 12” x 6” x 2-3/4” | 2 lb | 2025 | 118.00 |

**80250400 Stainless Steel Scoop**

## Weighing Dishes

These plastic anti-static weighing dishes are produced from a special grade of polystyrene and will resist diluted acids, aqueous solutions, alcohols and bases. They are safe, contaminent-free, biologically inert, economical containers which specifially made for many applications such as weighing, dispersing or storing. They can be used as quick freeze trays for sample material, discard trays, for broken ampules, or mixing trays for small batches. They have a smooth surface providing accurate pour-outs with minimal sample loss. Non-reactive with most substances and suitable for weiging static affected materials. Will withstand temperatures up to 80°C

### Hexagonal

Globe Scientific’s hexagonal plastic weighing dishes are avilable in 4 different sizes. The molded hexagonal design provides greater balance protection and safety. They are ideal for handling solids or liquids during weighing. They can be easily bent into pouring spouts to provide pour-outs with minimal sample loss.

| Part Number | Volume | Dimensions | Weight | SKU | List |
|---|---|---|---|---|---|
| 3615 | 20 mL | 38 mm | 1 lb | 2547 | $ 35.50 |
| 3616 | 50 mL | 64 mm | 1 lb | 2548 | 47.40 |
| 3617 | 200 mL | 102 mm | 1 lb | 2549 | 84.30 |
| 3618 | 350 mL | 127 mm | 1 lb | 2550 | 158.20 |

**Hexagonal**

### Square

Globe Scientific’s square weighing dishes are available in 3 different sizes. They have sloping sides, rounded corners and flat bottoms to ensure perfect stablility on counters.

| Part Number | Volume | Dimensions | Weight | SKU | List |
|---|---|---|---|---|---|
| 3620 | 20 mL | 41mm x 8mm H | 1 lb | 2551 | 23.80 |
| 3621 | 100 mL | 89mm x 25mm H | 1 lb | 2552 | 48.10 |
| 3622 | 330 mL | 140mm x 25mm H | 1 lb | 2553 | 123.00 |

**Square**

### Pour boat

Globe Scientific’s pour boats are available in 3 sizes. They are specifically made to facilitate dispensing of powdered and liquid materials. Smooth, uniform and economical, the molded material used is thicker than conventional weighing dishes.

| Part Number | Volume | Dimensions | Weight | SKU | List |
|---|---|---|---|---|---|
| 3623 | 2 mL | 54 x 44 x 8mm | 1 lb | 2554 | 19.80 |
| 3624 | 140 mL | 130 x 93 x 25mm | 1 lb | 2555 | 49.10 |
| 3625 | 270 mL | 191 x 125 x 25mm | 1 lb | 2556 | 122.80 |

**Pour-boat**

Totalcomp

## Clear Flexible Covers

Inuse covers for use with a variety of popular scales and balances. These covers protect from dripping paint and dyes, dust and dirt or any dripping liquid. They are easily replaceable when they have accumulated an excess of the contaminated product. The covers are made of a semi rigid clear PVC or PETG, yet they are soft enough to allow the easy use of the front panel keys on the scale or balance.

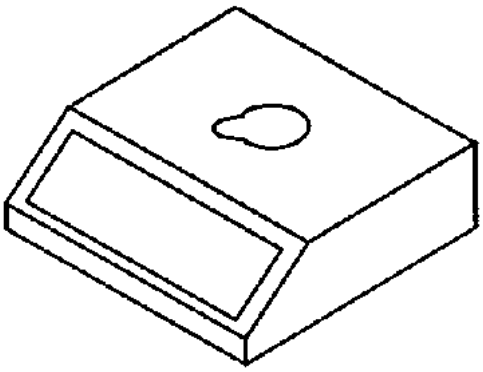

**TFC-EK12KA A&D Flexible covers**

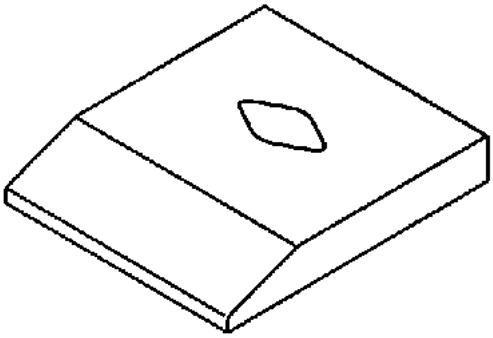

**TFC-XL/XE/XS Denver Flexible covers**

| Part Number | Weight | SKU | List |
|---|---|---|---|
| **A&D** | | | |
| TFC-EK12 A | 1 lb | 5569 | $ 40.00 |
| TFC-EK120/1200A | 1 lb | 5570 | 40.00 |
| TFC-EK6000H | 1 lb | 5571 | 40.00 |
| TFC-EK/EW series | 1 lb | 5572 | 40.00 |
| TFC-EP series | 1 lb | 5573 | 40.00 |
| TFC-FY series | 1 lb | 5575 | 40.00 |
| TFC-GF GX200/400/600 | 1 lb | 5576 | 40.00 |
| TFC-GF GX2000/4000/6000 | 1 lb | 5577 | 40.00 |
| TFC-HF6000/8000 | 1 lb | 5580 | 40.00 |
| TFC-HP series | 1 lb | 5581 | 40.00 |
| **Denver Instruments** | | | |
| TFC-TR series | 1 lb | 3367 | 40.00 |
| **Mettler/Toledo** | | | |
| TFC-AB54/AB104/AB204 | 1 lb | 5588 | 40.00 |
| TFC-PB602S-8001S | 1 lb | 5589 | 40.00 |
| TFC-AT series | 1 lb | 5590 | 40.00 |
| TFC-BB round pan | 1 lb | 5591 | 40.00 |
| TFC-BB square pan | 1 lb | 5592 | 40.00 |
| TFC-PB153-303 | 1 lb | 5593 | 40.00 |
| TFC-PC/AC | 1 lb | 5597 | 40.00 |
| TFC-PE round pan | 1 lb | 5598 | 40.00 |
| TFC-PE square pan | 1 lb | 5599 | 40.00 |
| TFC-PG-S 0.1 - 1g | 1 lb | 5602 | 40.00 |
| TFC-PM/PJ round pan | 1 lb | 5605 | 40.00 |
| TFC-PR/PG main body | 1 lb | 5607 | 40.00 |
| TFC-SB 8000-16000 | 1 lb | 5608 | 64.00 |
| TFC-SR/SG display 1 | 1 lb | 5610 | 40.00 |
| TFC-SR/SG display 2 | 1 lb | 5611 | 40.00 |
| 12102970 AP/PL | 1 lb | 5500 | 123.00 |
| 12102980 PL-S | 1 lb | 5501 | 185.00 |

Totalcomp

## Clear Flexible Covers

Continued.

| Part Number | Weight | SKU | List |
|---|---|---|---|
| **Ohaus** | | | |
| TFC-Adventurer | 1 lb | 5612 | $ 40.00 |
| TFC-B small | 1 lb | 5613 | 40.00 |
| TFC-Explorer/Voyager top loader | 1 lb | 5616 | 40.00 |
| TFC-Explorer/Voyager analytical | 1 lb | 5617 | 40.00 |
| TFC-GT/E round pan | 1 lb | 5618 | 40.00 |
| TFC-GT/E square pan | 1 lb | 5585 | 40.00 |
| TFC-Navigator | 1 lb | 5619 | 40.00 |
| TFC-SC Scout | 1 lb | 5620 | 40.00 |
| TFC-TM Pro Scout | 1 lb | 5586 | 40.00 |
| TFC-TS/TP series | 1 lb | 5621 | 40.00 |
| **Precisa** | | | |
| TFC-Precisa low profile | 1 lb | 5622 | 40.00 |
| **Sartorius** | | | |
| TFC-1400 | 1 lb | 5625 | 40.00 |
| TFC-1500/E | 1 lb | 5626 | 40.00 |
| TFC-BA round pan | 1 lb | 5627 | 40.00 |
| TFC-BA square pan | 1 lb | 5628 | 40.00 |
| TFC-BL round pan | 1 lb | 5276 | 40.00 |
| TFC-BL square pan | 1 lb | 5277 | 40.00 |
| TFC-BP round pan, small | 1 lb | 5629 | 40.00 |
| TFC-BP square pan, small | 1 lb | 5630 | 40.00 |
| TFC-BP square pan, large | 1 lb | 5631 | 40.00 |
| TFC-CP series triangular pan | 1 lb | 5632 | 40.00 |
| TFC-CP series square pan | 1 lb | 5633 | 40.00 |
| TFC-CP series analytical | 1 lb | 5634 | 40.00 |
| TFC-EA/EB series | 1 lb | 5635 | 40.00 |
| TFC-Element Series | 1 lb | 5278 | 40.00 |
| TFC-L2200 round pan | 1 lb | 5636 | 40.00 |
| TFC-L2200 square pan | 1 lb | 5637 | 40.00 |
| TFC-L610 | 1 lb | 5638 | 40.00 |
| TFC-PNA series | 1 lb | 5639 | 40.00 |
| TFC-PT | 1 lb | 5640 | 40.00 |
| TFC-Scaletec round pan | 1 lb | 5641 | 40.00 |
| TFC-U/B/LC | 1 lb | 5643 | 40.00 |

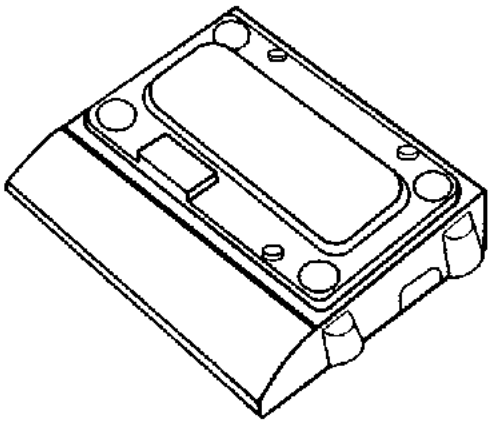

**TFC-SB 8000-16000 Mettler Flexible covers**

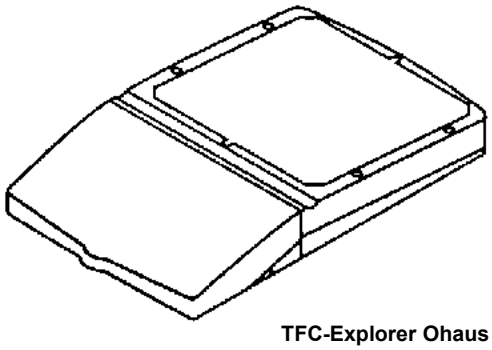

**TFC-Explorer Ohaus Flexible covers**

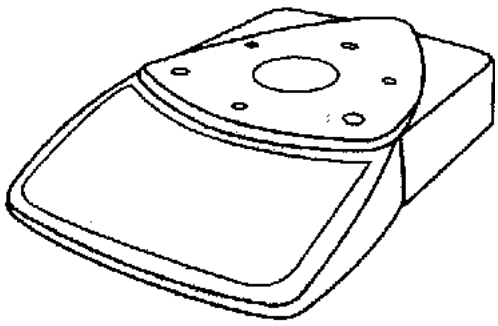

**TFC-CP triangular Sartorius Flexible covers**





13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

Totalcomp
Scales & Balances

www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

**Series 5**
**Digital Force Gauge**

MARK-10

## M5 Digital force gauge

Designed for tension and compression force testing. Reversible housing allows the gauge to be handheld or mounted to a test stand. Large, backlit graphics LCD display. 5 selectable units of measure: lbF, ozF, gF, kgF, N, kN, mN (depending on model). Keys are: ENTER, ON, UNITS/DIRECTION, DATA/DELETE, ZERO, MENU/ESCAPE, MODE. Data can be transferred to a PC or other data collector via USB, RS232, Mitutoyo (Digimatic), or analog outputs. High speed 7,000 Hz peak sampling rate. 1,000 point data memory with statistics and outputs. Live load bar with set point markers. Programmable set points, with alarms and outputs. Peak readings and set points always displayed. Averaging mode calculates average readings over time. External trigger mode for switch contact testing or remotely stopping display update. Configurable audio alarms and key tones. Password protection, configurable for individual keys and calibration. Included items: Carrying case with chisel, cone, V-groove, hook, flat, extension rod, universal voltage AC adapter, battery, quick start guide, USB cable, resource CD and NIST traceable certificate of calibration with data.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| M5-012 | 0.12 lbF | 1 lb | 7641 | $ 2,325.00 |
| M5-025 | 0.25 lbF | 1 lb | 7642 | 2,325.00 |
| M5-05 | 0.5 lbF | 1 lb | 7643 | 1,410.00 |
| M5-2 | 2 lbF | 1 lb | 7644 | 1,250.00 |
| M5-5 | 5 lbF | 1 lb | 7645 | 1,250.00 |
| M5-10 | 10 lbF | 1 lb | 7646 | 1,250.00 |
| M5-20 | 20 lbF | 1 lb | 7647 | 1,250.00 |
| M5-50 | 50 lbF | 1 lb | 7648 | 1,250.00 |
| M5-100 | 100 lbF | 1 lb | 7649 | 1,250.00 |
| M5-200 | 200 lbF | 1.2 lb | 7650 | 1,410.00 |
| M5-300 | 300 lbF | 1.2 lb | 7349 | 1,410.00 |
| M5-500 | 500 lbF | 1.2 lb | 7651 | 1,410.00 |
| M5-750 | 750 lbF | 1.8 lb | 7350 | 1,700.00 |
| M5-1000 | 1,000 lbF | 1.8 lb | 7351 | 1,700.00 |
| M5-1500 | 1,500 lbF | 1.8 lb | 7352 | 1,700.00 |
| M5-2000 | 2,000 lbF | 1.8 lb | 7353 | 1,700.00 |
| M5-2-COF | 2,000 lbF | 1.8 lb | 7354 | 1,470.00 |
| COF-K1 | Kit w/G1086 coef of friction feature | 1.8 lb | 7355 | 2,900.00 |

MARK-10

## M7 Professional force gauge

High speed data capture. Foot switch. User difined unit. Keys for: ZERO, UNITS, MENU, DATA, MODE. 5,000 point memory and statistics. Break detection. USB, RS232. Mitutoyo and analog outputs. Averaging, set points with outputs, external trigger, extension rod chisel, cone, v-groove, flat, hook. AC adapter/charger. Carrying case. NIST certificate. 3 year warranty.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| M7-012 | 0.12 lbF | 1 lb | 8108 | $ 3,450.00 |
| M7-025 | 0.25 lbF | 1 lb | 8109 | 3,450.00 |
| M7-05 | 0.5 lbF | 1 lb | 8110 | 2,100.00 |
| M7-2 | 2 lbF | 1 lb | 8111 | 1,900.00 |
| M7-5 | 5 lbF | 1 lb | 8112 | 1,900.00 |
| M7-10 | 10 lbF | 1 lb | 8113 | 1,900.00 |
| M7-20 | 20 lbF | 1 lb | 8114 | 1,900.00 |
| M7-50 | 50 lbF | 1 lb | 8115 | 1,900.00 |
| M7-100 | 100 lbF | 1 lb | 8116 | 1,900.00 |
| M7-200 | 200 lbF | 1 lb | 8117 | 2,100.00 |
| M7-500 | 500 lbF | 1 lb | 8118 | 2,100.00 |

M7
Professional Force Guage



13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

**M4**
**Performance force guage**

## M4 Performance force gauge

Live load bar graph with with set point markers. Large backlit graphic display. Keys for: ZERO, UNITS, MENU, DATA, MODE. 3,000 Hz sampling rate. 50 point data memory with statistics and outputs. MESUR Lite Data collection software. Configurable audio alarms and key tones. USB, RS232, Mitutoyo. Extension rods, chisel, cone, v-groove, flat, hook, AC adapter/charger. Carrying case NIST certificate.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| M4-012 | 0.12 lbF | 1 lb | 8119 | $ 1,980.00 |
| M4-025 | 0.25 lbF | 1 lb | 8120 | 1,980.00 |
| M4-05 | 0.5 lbF | 1 lb | 8121 | 1,195.00 |
| M4-2 | 2 lbF | 1 lb | 8122 | 995.00 |
| M4-5 | 5 lbF | 1 lb | 8123 | 995.00 |
| M4-10 | 10 lbF | 1 lb | 8124 | 995.00 |
| M4-20 | 20 lbF | 1 lb | 8125 | 995.00 |
| M4-50 | 50 lbF | 1 lb | 8126 | 995.00 |
| M4-100 | 100 lbF | 1 lb | 8127 | 995.00 |
| M4-200 | 200 lbF | 1 lb | 8128 | 1,195.00 |
| M4-500 | 500 lbF | 1 lb | 8129 | 1,195.00 |

**M3**
**Digital force gauge**

## M3 Digital force gauge

Ultra compact size. Ergonomic, reversible aluminum housing allows for hand held use or test stand mounting for more sophisticated testing requirements. Large backlit graphic display. 4 selectable units of measure: lbf, gF, kgF, N(depending on model). Display indicators for: Set Points, Pass/Fail indicators, Current Reading, Battery Indicator, Tension/Compression indicator, Peak Readings, Measurement Mode, Units of Measure, Analog Load Bar w/ Set Point Markers. High speed 2,000 Hz sampling rate. USB data output. Configurable audio alarms and key tones. MESUR Lite data collection software included. Included items are: Carrying case with chisel, cone, V-groove, hook, flat, extension rod, universal voltage AC adapter, battery, quick start guide, USB cable, resource CD (USB driver, MESUR Lite software, MESUR gauge DEMO software, and user's guide), and NIST-traceable certificate of calibration (certificate with data is available for an additional charge). AC or rechargeable battery. Multi-step low battery indicator is displayed, guage shuts off automatically when power is too low..

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| M3-012 | 0.12 x 0.0001 lbF | 1 lb | 6680 | $ 1,700.00 |
| M3-025 | 0.25 x 0.0002 lbF | 1 lb | 6681 | 1,700.00 |
| M3-05 | 0.05 x 0.0005 lbF | 1 lb | 6682 | 925.00 |
| M3-2 | 2 x 0.002 lbF | 1 lb | 6683 | 750.00 |
| M3-5 | 5 x 0.005 lbF | 1 lb | 6684 | 750.00 |
| M3-10 | 10 x 0.01 lbF | 1 lb | 6685 | 750.00 |
| M3-20 | 20 x 0.02 lbF | 1 lb | 6686 | 750.00 |
| M3-50 | 50 x 0.05 lbF | 1 lb | 6687 | 750.00 |
| M3-100 | 100 x 0.1 lbF | 1 lb | 6688 | 750.00 |
| M3-200 | 200 x 0.2 lbF | 1 lb | 6689 | 925.00 |
| M3-500 | 500 x 0,5 lbF | 1 lb | 6690 | 925.00 |



Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

MARK-10

## M2 Economical force gauge

Reversible housing for alternate load cell orientation. A backlit graphic LCD displays the current, peak tension, or peak compression reading. Keys for: Menu, Peak, Zero. Peak tension and compression readings are reliably captured via the gauges' ±0.5% accuracy and 500 Hz sampling rate. Powered by 9V battery or available AC adapter. Series 2 gauges are directly compatible with Mark-10 test stands and grips.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| M2-2 | 2 lbF | 1 lb | 8130 | $ 495.00 |
| M2-5 | 5 lbF | 1 lb | 8131 | 495.00 |
| M2-10 | 10 lbF | 1 lb | 8132 | 495.00 |
| M2-20 | 20 lbF | 1 lb | 8133 | 495.00 |
| M2-50 | 50 lbF | 1 lb | 8134 | 495.00 |
| M2-100 | 100 lbF | 1 lb | 8135 | 495.00 |
| M2-200 | 200 lbF | 1 lb | 8136 | 675.00 |
| M2-500 | 500 lbF | 1 lb | 8137 | 675.00 |
| **Options** | | | | |
| 12-1049 Carrying Case | | 1 lb | 8138 | 45.00 |
| AC1030 AC adapter 110 VAC | | 1 lb | 8139 | 45.00 |
| 3-1031-2 Attachment kit for M2-2 - M2-100 | | 1 lb | 8140 | 100.00 |
| 23-1031-3 Attachment kit for M2-200 - M2-500 | | 1 lb | 8141 | 120.00 |
| CERT NIST traceable certificate of calibration w/ data | | 1 lb | 5971 | 85.00 |

**Series 2**
**Economical Force Gauge**

MARK-10

## BG Digital force gauge

Reversible aluminum housing for hand held use or stand mounting. Programmable analog and digital filters. Compatible with all Mark 10 test stands and grips. Keys are: POWER, UNITS, ZERO, DATA, MODE, CLEAR. Units: lb, kg(g). 4-1/2 digit 0.3" LCD. 62 readings per second. GCL Gauge Control Language for full control of all functions. Measures tensile and compressive forces. Permanent configuration memory. Automatic peak memory, push button calibration. RS232 Mitutoyo and analog outputs, programmable auto shut off. Battery or AC operation. Includes cushioned carrying case with an AC adapter, user's manual and NIST certificate with a set of accessories: chisel, cone, V groove, hook, flat, extension.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| BG2 | 2 x 0.001 lb | 9 lb | 5763 | $ 395.00 |
| BG10 | 10 x 0.005 lb | 9 lb | 5765 | 395.00 |

**BG**
**Digital Force Gauge**

**TT03**
**Torque gauge**

**TT03C**
**Cap torque gauge**

**WT3-201 manual**
**wire crimp pull tester**

**WT3-201 motorized**
**wire crimp pull tester**

MARK-10

## TT03 Torque gauge

Designed for clockwise and counter-clockwise torque testing. Capacities from 10 ozFin to 100 lbFin. Dedicated torque sensor with Jacobs chuck is used to grip a sample, bit or fixture. Hand held or mounted to a test stand. USB output gives continuous or individual readings to a PC. Set point indicators for High, Low, In-range. Analog load bar gives visual indication of applied load.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| MTT03-10Z | 10 ozFin x 0.01 ozFin | 1.8 lb | 7512 | $ 1,595.00 |
| MTT03-20Z | 20 ozFin x 0.02 ozFin | 1.8 lb | 7513 | 1,595.00 |
| MTT03-50Z | 50 ozFin x 0.05 ozFin | 1.8 lb | 7514 | 1,595.00 |
| MTT03-12 | 12 lbFin x 0.01 lbFin | 1.8 lb | 7515 | 1,400.00 |
| MTT03-50 | 50 lbFin x 0.05 lbFin | 1.8 lb | 7516 | 1,400.00 |
| MTT03-100 | 100 lbFin x 0.1 lbFin | 1.8 lb | 7517 | 1,400.00 |
| **Cap torque gauge** | | | | |
| MTT03C-12 | 12 lbFin x 0.01 lbFin | 2.1 lb | 7518 | 1,775.00 |
| MTT03C-50 | 50 lbFin x 0.05 lbFin | 2.1 lb | 7519 | 1,775.00 |
| MTT03C-100 | 100 lbFin x 0.1 lbFin | 2.1 lb | 7520 | 1,775.00 |

MARK-10

## WT3 Wire crimp pull tester

Wire crimp pull testing. A manual ergonomic lever applies force or a motorized unit will automatically apply load to a selected load or load until the sample breaks. Adjustable wire terminal fixture fits wire sizes up to AWG 3 or 0.25“. The motorized tester starts automatically when sample is loaded and returns to home when sample breaks. USB, RS232, Mitutoyo and analog outputs. Save and recall up to 500 test profiles. Pull to a specified load or maintain load for a specified period of time as per UL486A/B.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| WT3-201 manual | 200 lbF | 3.1 lb | 7521 | $ 2,620.00 |
| WT3-201M motorized | 200 lbF | 4.2 lb | 7522 | 4,890.00 |
| **Options** | | | | |
| WF010 Save multiple profiles option for WT3-201M | | 0.0 lb | 7523 | 895.00 |
| WF011 Pull to load option for WT3-201M | | 0.0 lb | 7524 | 675.00 |
| WF012 Load holding option for WT3-201M | | 0.0 lb | 7525 | 1,010.00 |
| WF013 Date & time stamp option for WT3-201M | | 0.0 lb | 7526 | 620.00 |
| WFCOMP Complete options package for WT3-201M | | 0.0 lb | 7527 | 2,080.00 |
| WF3002 Ring terminal fixture for WT3-201 / WT3-201M | | 1.1 lb | 7528 | 220.00 |
| WF3003 Machinable blank terminal fixture WT3-201/M | | 1.8 lb | 7529 | 200.00 |
| WF3004 Carrying case for WT3-201 | | 2.9 lb | 7530 | 285.00 |
| WF3004-1 Carrying case for WT3-201M | | 3.1 lb | 7531 | 285.00 |
| AC1049 Calibration fixture for WT3-201/M (no weights) | | 2.1 lb | 7532 | 1,000.00 |



Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp®
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

MARK-10

## MTT01 Cap torque tester

The CT captures peak torque in both clockwise and counterclockwise directions for application and removal measurements. Tester features a solid aluminum housing and rugged construction for many years of service in laboratory or production environments. Adjustable posts effectively grip a broad range of container shapes and sizes, while a set of optional jaws is available as an alternative gripping method. Accepts samples up to 7.5" dia. Selectable units of measurement are lbin, kgFmm and Ncm. Movable container gripping posts. Battery or AC operation. Includes set of four posts, AC adapter and 9V non rechargeable battery, 30 hours of continuous operation. Users manual and NIST-traceable certificate of calibration.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| MTT01-12 | 12 x 0.01 lbin | 10 lb | 4514 | $ 1,660.00 |
| MTT01-25 | 25 x 0.02 lbin | 10 lb | 4554 | 1,660.00 |
| MTT01-50 | 50 x 0.05 lbin | 10 lb | 4515 | 1,660.00 |
| MTT01-100 | 100 x 0.1 lbin | 10 lb | 4516 | 1,660.00 |
| **Options** | | | | |
| CT001 Sample gripping jaws for TT01 pair | | 1.0 lb | 3220 | 85.00 |
| CT002 Carrying case for TT01 | | 2.1 lb | 4256 | 250.00 |
| CT003 Adjustable gripping jaws for TT01, pair | | 1.1 lb | 4257 | 395.00 |
| CT004 Set of posts for TT01/R53 1.25" long, set of 4 | | 0.4 lb | 4258 | 170.00 |
| CT005 Set of posts for TT01/R53 2.5" long, set of 4 | | 0.6 lb | 4259 | 195.00 |
| CT006 Set of posts for TT01/R53 4" long, set of 4 | | 0.8 lb | 4260 | 225.00 |
| CT007 Kit of 4 posts of each length, set of 12 | | 1.8 lb | 4261 | 450.00 |
| AC1036 Calibration kit for TT01 (weights not included) | | 2.7 lb | 4262 | 760.00 |

**MTT01**
**Cap torque t ester**
**w/ standard adjustable posts**

**Optional**
**Gripping Jaws**

**Standard**
**Adjustable Posts**

MARK-10

## MTT02 Digital torque tester

Simple, yet accurate solution for testing torque screwdrivers, wrenches and other tools. Solid aluminum housing make it rugged enough for many years of service in production or laboratory use. Universal receptacle with square drive and grooves accepts commpn bits and attachments. Applications exist in virtually every industry. Captures peak torque in both clockwise and counterclockwise directions. Selectable units of measure are: lbFin, kgFmm, Ncm. Push button calibration. RS-232 and Mitutoyo (Digimatic). WinWedge software allows the torque tester to send data to a PC for furthur analysis in Windows applications such as Excel. AC or non-rechargeable 9V battery with Intelligent Power Management System (IPM). IPM warns user via "LO BAT" indicator and then will power off the gauge. 30 hours of continuous use.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| MTT02-12 | 12 lbin | 5 lb | 6900 | $ 1,495.00 |
| MTT02-25 | 25 lbin | 5 lb | 6808 | 1,495.00 |
| MTT02-50 | 50 lbin | 5 lb | 6901 | 1,495.00 |
| MTT02-100 | 100 lbin | 5 lb | 6902 | 1,495.00 |
| **Options** | | | | |
| AC1066-1 | Rundown fixture 0-50 lbFin | 1 lb | 6809 | 295.00 |
| AC1066-2 | Rundown fixture 0-50 lbFin | 1 lb | 6810 | 295.00 |
| ST001 | Bench mounting bracket | 2 lb | 6903 | 170.00 |
| ST002 | Carrying case for TT02 | 2 lb | 6811 | 200.00 |

**MTT02**
**Digital Torque Tester**

**MTT05**
**Torque Tester**

## MTT05 Torque tester

Universal torque testers have a stainless steel loading surface with conveniently spaced threaded holes for mounting fixtures and attachments. Measures torques up to 100 lbTin. For use in the laboratory or the production floor. USB, RS232, Mititoyo and analog outputs. Data memory, set points and automatic data output. Peak torque detection. Pass fail detection.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| MTT05-12 | 12 x 0.01 lbin | 10 lb | 6813 | $ 1,495.00 |
| MTT05-25 | 25 x 0.02 lbin | 10 lb | 6814 | 1,495.00 |
| MTT05-50 | 50 x 0.05 lbin | 10 lb | 6815 | 1,495.00 |
| MTT05-100 | 100 x 0.1 lbin | 10 lb | 6816 | 1,495.00 |
| **Options** | | | | |
| CT002 | Carrying case for TT05/TT01 | 2.1lb | 4256 | 250.00 |

**M5I**
**Torque Indicator**

**MR01**
**S-Beam**

## Plug & Test indicator & sensors

Force and torque indicators

| Part Number | | Weight | SKU | List |
|---|---|---|---|---|
| M7I | Professional force/torque indicator | 2 lb | 5766 | $ 1,740.00 |
| M5I | Advanced force/torque indicator | 2 lb | 5799 | 1,025.00 |
| M3I | Basic force/torque indicator | 2 lb | 5767 | 710.00 |
| PTA | User configurable adapter w/software | 2 lb | 5768 | 275.00 |

## Plug & Test indicator & sensors

Force sensors

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| MR01-50 | 50 lb | 2 lb | 5810 | $ 700.00 |
| MR01-100 | 100 lb | 2 lb | 5811 | 700.00 |
| MR01-200 | 200 lb | 2 lb | 5812 | 700.00 |
| MR01-300 | 300 lb | 2 lb | 5769 | 700.00 |
| MR01-500 | 500 lb | 2 lb | 5813 | 700.00 |
| MR01-750 | 750 lb | 2 lb | 5770 | 700.00 |
| MR01-1000 | 1,000 lb | 2 lb | 5814 | 700.00 |
| MR01-1500 | 1,500 lb | 2 lb | 5771 | 700.00 |
| MR01-2000 | 2,000 lb | 2 lb | 5815 | 700.00 |
| MR01-5000 | 5,000 lb | 2 lb | 5816 | 1,050.00 |
| MR01-10000 | 10,000 lb | 2 lb | 5817 | 1,050.00 |
| MR02-100 | 100 lb | 1 lb | 5803 | 880.00 |
| MR02-200 | 200 lb | 1 lb | 5804 | 880.00 |
| MR02-500 | 500 lb | 1 lb | 5805 | 880.00 |
| MR02-1000 | 1000 lb | 1 lb | 5806 | 880.00 |
| MR02-2000 | 2000 lb | 1 lb | 5807 | 880.00 |
| MR02-5000 | 5000 lb | 1 lb | 5808 | 1,000.00 |
| MR02-10000 | 10000 lb | 1 lb | 5809 | 1,000.00 |



Prices are subject to change without notice. See website for current prices.
Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp®
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

MARK-10

## Plug & Test indicator & sensors, continued

Force sensors

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| MR03-025 | 0.25 lb | 1 lb | 5818 | $ 1,510.00 |
| MR03-05 | 0.5 lb | 1 lb | 5819 | 915.00 |
| MR03-22 | 2 lb | 1 lb | 5820 | 765.00 |
| MR03-5 | 5 lb | 1 lb | 5821 | 765.00 |
| MR03-10 | 10 lb | 1 lb | 5822 | 765.00 |
| MR03-20 | 20 lb | 1 lb | 5823 | 765.00 |
| MR03-50 | 50 lb | 1 lb | 5824 | 765.00 |
| MR03-100 | 100 lb | 1 lb | 5825 | 765.00 |

**MR03**
**Force sensor compression**

MARK-10

## MR04 Minature Force Sensor

Extremely compact force measurement sensor for tensile and compressive loads in a limited space. This sensor features outstanding mechanical overload protection of up to 1,000% of full scale for most applications and threaded holes on two sides for the mounting of attachments or implements. Member of the BGi family interchangeable sensors. Personality module holds all calibration and configuration data. Measures tensile and compressive forces. Mechanical overload protection of up to 200% for SJR50 and SJR100 when used in tension only. Accuracy ± 0.2% of full scale ± 1 digit + BGI. NIST traceable certificaltes of calibration included.

| Part number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| MR04-025M | 0.25 lb | 1 lb | 6745 | $ 2,850.00 |
| MR04-05M | 0.5 lb | 1 lb | 6746 | 1,750.00 |
| MR04-2 | 2 lb | 1 lb | 6747 | 1,750.00 |
| MR05-5 | 5 lb | 1 lb | 6748 | 1,750.00 |
| MR04-10 | 10 lb | 1 lb | 6749 | 1,750.00 |
| MR04-20 | 20 lb | 1 lb | 6750 | 1,750.00 |
| MR04-50 | 50 lb | 1 lb | 6751 | 1,750.00 |
| MR04-100 | 100 lb | 1 lb | 6752 | 1,750.00 |
| MR05-500 | 500 lb | 1 lb | 6817 | 875.00 |
| **Wire pull force sensor** | | | | |
| MR06-200 | 200 lb | 1 lb | 6112 | 2,270.00 |

**MR04**
**Tension compression**

**MR05**
**Miniature Force Sensor**

MARK-10

## MR50 Torque sensor, Universal

Bi-directional, small size. Rugged aluminum housing, remote operation. Accuracy: 0.35% FS . NIST traceable calibration certificate included.

| Part number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| MR50-10Z | 10 ozin | 1 lb | 5850 | $ 1,020.00 |
| MR50-20Z | 20 ozin | 1 lb | 5851 | 1,020.00 |
| MR50-50Z | 50 ozin | 1 lb | 5852 | 1,020.00 |
| MR50-12 | 12 lbin | 1 lb | 5853 | 940.00 |
| MR50-50 | 50 lbin | 1 lb | 5854 | 940.00 |
| MR50-100 | 100 lbin | 1 lb | 5855 | 940.00 |

**MR50**
**Universal torque sensor**



Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

**MR51**
**Universal torque sensor**

## MR51 Torque Sensor, Universal

Member of the BGI interchangeable sensors. Outstanding overload protection, interchangeable chucks. Personality module holds all calibration and configuration data. Accuracy: 0.15% FS. NIST traceable calibration certificate included.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| MR51-10Z | 10 ozin | 1.lb | 5857 | $ 995.00 |
| MR51-20Z | 20 ozin | 1 lb | 5858 | 995.00 |
| MR51-50 Z | 50 ozin | 1 lb | 5859 | 995.00 |
| MR51-12 | 12 lbin | 1.lb | 5860 | 925.00 |
| MR51-50 | 50 lbin | 1.lb | 5861 | 925.00 |
| MR51-100 | 100 lbin | 1.lb | 5862 | 925.00 |
| **Accessories** | | | | |
| G1016-1 Jacobs chuck for STH | 0.25” | 1 lb | 5863 | 165.00 |
| G1016-2 Jacobs chuck for STH | 0.375” | 1 lb | 5864 | 170.00 |
| G1016-3 Jacobs chuck for STH | 0.5” | 1 lb | 5865 | 175.00 |
| G1017 Bit holder for STH, 1/4” hex | | 1 lb | 5866 | 175.00 |

**MR52**
**Tool Calibration**

## MR52 Torque sensor, Tool calibration

Small size, remote operation. Universal mounting, may be used for torque tool calibration or as a component of a torque testing system. Accuracy: 0.35% of full scale. NIST traceable calibration certificate included.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| MR52-1OZ | 10 ozin | 1 lb | 5837 | $ 1,025.00 |
| MR52-2OZ | 20 ozin | 1 lb | 5838 | 1,025.00 |
| MR52-5OZ | 50 ozin | 1 lb | 5839 | 1,025.00 |
| MR52-12 | 12 lbin | 1 lb | 5840 | 960.00 |
| MR52-50 | 50 lbin | 1 lb | 5841 | 960.00 |
| MR52-100 | 100 lbin | 1 lb | 5842 | 960.00 |





www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp®
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

MARK-10

## MR55 Torque sensor, Wrench extension

Rugged all metal construction. Converts any wrench to a torque tool. May be used as torque tool or as a component of a torque testing system. Accuracy: 0.6% of full scale NIST traceable calibration certificate included.

| Part number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| MR55-20 | 20 x 0.02 lbin | 1 lb | 6734 | $ 1,450.00 |
| MR55-50 | 50 x 0.05 lbin | 1 lb | 6735 | 1,450.00 |
| MR55-100 | 100 x 0.1 lbin | 1 lb | 6736 | 1,450.00 |
| MR55-200 | 200 x 0.2 lbin | 2 lb | 5845 | 1,450.00 |
| MR55-400 | 400 x 0.5 lbin | 2 lb | 5846 | 1,450.00 |
| MR55-1000 | 1000 x 0.1 lbin | 2 lb | 5847 | 1,450.00 |
| MR55-5000 | 5000 x 5 lbin | 2 lb | 5848 | 1,450.00 |

**MR54**
**Wrench Extension**

MARK-10

## Motorized test stands

Single column force tester for tension and compression for use in the laboratory or production floor. Used for break testing, cycling, limit testing to a load or distance, loadholding and elongation. Adjustable test speed,force and distance limits. Data can be output to a PC for analysis.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| **Options** | | | | |
| ESM303-001-1 | 6” Single column extension | 2 lb | 8366 | $ 640.00 |
| ESM303-001-2 | 12” Single column extension | 4 lb | 8367 | 685.00 |
| ESM303-001-3 | 24” Single column extension | 8 lb | 8368 | 815.00 |
| ESM303-002-1 | 6” Double column extension | 4 lb | 8369 | 2,900.00 |
| ESM303-002-2 | 12” Double column extension | 8 lb | 8370 | 3,100.00 |
| ESM303-002-3 | 24” Double column extension | 16 lb | 8371 | 3,250.00 |
| AF008 | FollowMe manual positioning | | 8375 | 380.00 |
| AF009 | Travel indication w/USB output | 1 lb | 8376 | 1,380.00 |
| AF010 | Computer control via USB | | 8377 | 1,380.00 |
| AF011 | Programmable travel set points | 1 lb | 8378 | 380.00 |
| AF012 | Overload protection | | 8379 | 380.00 |
| AF013 | Auto return | | 8380 | 265.00 |
| AF014 | Cycling/dwell time | | 8381 | 380.00 |
| AF016 | Independent up and down speeds | | 7489 | 230.00 |
| AF017 | Extended speed range, low | | 7490 | 265.00 |
| AF018 | Extended speed range, high | | 7491 | 265.00 |
| AF019 | Break detection | | 7492 | 265.00 |
| AF020 | Load holding | | 7493 | 595.00 |
| AF021 | Preload/sample touch | | 7494 | 380.00 |
| AF022 | Profiles | | 7495 | 755.00 |
| AFCOMP | Complete options package, vertical | | 7496 | 5,450.00 |
| AFCOMP-H | Complete options package, horizontal | | 7497 | 5,450.00 |

**ESM303**
**Motorized test stand**
**Vertical**

**ESM303H**
**Motorized test stand**
**Horizontal**

**TSTM-DC**
**Motorized test stand**
**Vertical**

**TSTMH-DC**
**Motorized test stand**
**Horizontal**

MARK-10

## Motorized test stands, continued

Torque testing for closures and fasteners. Vertical and horizontal units. Motorized clockwise and counterclockwise rotation. Settable rotation speed. Constant speed with load c;hanges. Fixture mounting plate with angle indicator. Easy change between angle and torque limits. Custom column lengths.

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| TSTM-DC Vertical | 100 lb | 195 lb | 840 | $ 8,925.00 |
| TSTMH-DC Horizontal | 100 lb | 195 lb | 841 | 8,925.00 |
| TSTM-DC-1 Vertical | 200 lb | 195 lb | 842 | 9,950.00 |
| TSTMH-DC-1 Horizontal | 200 lb | 195 lb | 843 | 9,950.00 |
| TSTM-DC-2 Vertical, 60RMP | 100 lb | 195 lb | 844 | 9,660.00 |
| TSTMH-DC-2 Horizontal, 60RMP | 100 lb | 195 lb | 845 | 9,660.00 |

**Options**

| | | | | |
|---|---|---|---|---|
| SP-2496 | Torque upgrade | | 846 | 965.00 |
| SP-2624 | Speed upgrade | | 847 | 725.00 |
| TST002 | Angle encoder | | 848 | 725.00 |
| TSF002 | Wall mounting kit | | 849 | 270.00 |
| TSFM500(H)-DC | Column extension 12” | | 850 | 375.00 |
| TSTM(H)-DC | Column extension 42” | | 851 | 895.00 |
| AC1057 | Force gauge mounting kit | 12 lb | 6127 | 480.00 |
| AC1056 | Load cell mounting kit | 12 lb | 7900 | 480.00 |
| SF008 | FollowMe positioning | | 7901 | 680.00 |
| SF009 | Travel indication ESM1500/ESM750 | | 7902 | 2,385.00 |
| SF009-1 | Travel indication ESM1500S/ESM750S | | 7903 | 1,830.00 |
| SF010 | Computer control via USB | | 7904 | 1,400.00 |
| SF011 | Programmable travel set points | | 7905 | 1,138.00 |
| SF012 | Overload protection | | 7906 | 985.00 |
| SF013 | Auto return | | 7907 | 675.00 |
| SF014 | Cycling dwell time | | 7908 | 985.00 |
| SF016 | Independent up & down speeds | | 7909 | 605.00 |
| SF017 | Extended speed range, low | | 7910 | 675.00 |
| SF018 | Extended speed range, high 1500/1500S | | 7911 | 675.00 |
| SF018-1 | Extended speed range, high 750/750S | | 7912 | 675.00 |
| SF019 | Break detection | | 7913 | 675.00 |
| SF020 | Load holding | | 7914 | 825.00 |
| SF021 | Preload sample touch | | 7536 | 830.00 |
| SF022 | Profiles | | 7537 | 1,130.00 |
| SFCOMP | Complete options ESM1500/ESM750 | | 7538 | 8,200.00 |
| SFCOMP-1 | Complete options ESM1500S/ESM750S | | 7539 | 7,645.00 |



Prices are subject to change without notice. See website for current prices.
Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp®
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

MARK-10

## Manual test stands

Economical and compact push/pull test stands. Lever action gives quick testing at high speeds, while hand wheel action gives fine positioning and better motion control

| Part Number | | Capacity | Weight | SKU | List |
|---|---|---|---|---|---|
| ES05 Test stand with lever | | 30 lb | 10 lb | 5542 | $ 760.00 |
| ES10 Test stand with lever | | 100 lb | 10 lb | 5879 | 760.00 |
| ES20 Test stand with hand wheel | | 100 lb | 10 lb | 5880 | 850.00 |
| **Options** | | | | | |
| ES001 | Dial indicator for ES10/ES20 | | 1 lb | 5882 | 185.00 |
| ES002 | Digital indicator for ES10/ES20 | | 2 lb | 5543 | 430.00 |
| ES001NI | Brackets for indicator 9.5mm dia | | 2 lb | 5544 | 145.00 |
| ES001NI-8MM | Brackets for indicator 8mm dia | | 2 lb | 5545 | 145.00 |
| AC1060 | Base plate w/threaded holes | | 2 lb | 5546 | 95.00 |

**ES**
**Manual test stand**

**ES30**
**Manual test stand**

| Part Number | | Capacity | Weight | SKU | List |
|---|---|---|---|---|---|
| ES30 Test stand with hand wheel | | 200 lb | 17 lb | 5881 | $ 1,220.00 |
| **Options** | | | | | |
| ESM001 | Digital travel display for ES30 6” | | 1 lb | 5885 | 985.00 |
| ESM004 | Digital travel display for ES30 12” | | 1 lb | 5473 | 1,900.00 |
| ESM003-1 | Column extension for ES30 6” | | 1 lb | 5474 | 190.00 |
| ESM003-2 | Column extension for ES30 12” | | 1 lb | 5475 | 220.00 |
| ESM003-3 | Column extension for ES30 24” | | 1 lb | 5476 | 275.00 |

**TSA**
**Manual test stand**

**TSB**
**Manual test stand**

| Part Number | | Capacity | Weight | SKU | List |
|---|---|---|---|---|---|
| TSA750 Test stand lever, vertical | | 750 lb | 16 lb | 5867 | $ 1,375.00 |
| TSA750H Test stand lever, horizontal | | 750 lb | 13 lb | 5868 | 1,375.00 |
| **Options** | | | | | |
| TSA-1 | Digital travel display for TSA | | 1 lb | 5869 | 870.00 |
| TSA-2 | Horizontal wall mount kit for TSA | | 1 lb | 5870 | 190.00 |
| TSA-3 | Table assembly for TSA/TSAH | | 1 lb | 5871 | 260.00 |
| TSB100 Test stand with lever | | 100 lb | 12 lb | 5872 | $ 1,095.00 |
| **Options** | | | | | |
| TSB003 | Travel stops kit for TSB | | 1 lb | 5875 | 115.00 |

| Part Number | | Capacity | Weight | SKU | List |
|---|---|---|---|---|---|
| TSC1000 Test stand, wheel, vertical | | 1,000 lb | 25 lb | 5876 | $ 1,895.00 |
| TSC1000H Test stand wheel, horizontal | | 1,000 lb | 20 lb | 5877 | 1,895.00 |
| **Options** | | | | | |
| TSC001 | Digital travel display for TSC/TSCH | | 1 lb | 5878 | 820.00 |

**TSC**
**Manual test stand**

**TST**
**Manual test stand**

| Part Number | | Capacity | Weight | SKU | List |
|---|---|---|---|---|---|
| TSF Test stand, wheel, vertical | | 1,000 lb | 25 lb | 5547 | $ 2,895.00 |
| TSFH Test stand wheel, horizontal | | 1,000 lb | 20 lb | 5548 | 2,895.00 |
| **Options** | | | | | |
| TSF001 | Digital travel display for TSF | | 1 lb | 5549 | 985.00 |
| TST Test stand, wheel, vertical | | 100 lb | 17 lb | 6740 | $ 3,580.00 |
| TSTH Test stand wheel, horizontal | | 100 lb | 17 lb | 6741 | 3,580.00 |
| **Options** | | | | | |
| TST001 | Digital travel display for TST/TSTH | | 2 lb | 5550 | 1,190.00 |
| TST002 | Mounting kit for TST/TSTH | | 4 lb | 5551 | 725.00 |
| TSA/B/C(H) | Column extension 12” | | | 5552 | 230.00 |
| TSF(H) | Column extension 12” | | | 5553 | 295.00 |
| TST(H) | Column extension 12” | | | 5554 | 375.00 |



Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

EK3

ME force gauge

EKE

G1001
Wire terminal grip

MARK-10

## Ergonomics testing kits

For use in muscle strength assessment, ergonomic studies and workplace design.

| Part Number | | Capacity | Weight | SKU | List |
|---|---|---|---|---|---|
| EK3-100 Test kit w/Series 3 gauge | | 100 lb | 12 lb | 4534 | $ 1,175.00 |
| EK3-200 Test kit w/Series 3 gauge | | 200 lb | 12 lb | 4535 | 1,175.00 |
| EK3-500 Test kit w/Series 3 gauge | | 500 lb | 12 lb | 4536 | 1,175.00 |
| ME-100 Force gauge | | 100 lb | 3 lb | 4537 | 1,175.00 |
| ME-200 Force gauge | | 200 lb | 3 lb | 4538 | 1,175.00 |
| ME-500 Force gauge | | 500 lb | 3 lb | 4539 | 1,175.00 |
| **Options** | | | | | |
| E1000 | Carrying case, small | | 2 lb | 4540 | 200.00 |
| E1001 | Carrying case, large | | 3 lb | 4541 | 315.00 |
| E1002 | Padded attachment, square | | 2 lb | 4542 | 90.00 |
| E1003 | Padded attachment, rectangular | | 2 lb | 4543 | 100.00 |
| E1004 | Padded attachment, curved | | 2 lb | 4544 | 115.00 |
| E1005 | Padded attachment, circular | | 2 lb | 4545 | 140.00 |
| E1006 | Snap hook | | 2 lb | 4546 | 125.00 |
| E1007 | Snap hook chain assy | | 2 lb | 4556 | 110.00 |
| E1008 | Single handle grip | | 2 lb | 4557 | 115.00 |
| E1009 | Double handle grip | | 2 lb | 4558 | 170.00 |
| E1010 | Pistol grip | | 2 lb | 4559 | 285.00 |
| E1011 | Grip adapter | | 2 lb | 4560 | 55.00 |
| E1012 | Looped cable | | 2 lb | 4561 | 50.00 |
| E1013 | Myometer assessory | | 2 lb | 4562 | 325.00 |

| Part Number | Capacity | Weight | SKU | List |
|---|---|---|---|---|
| **Advanced Ergonomics testing kit** | | | | |
| EKE-100-1 Test kit w/Series E gauge | 100 lb | 12 lb | 4563 | $ 1,650.00 |
| EKE-200-1 Test kit w/Series E gauge | 200 lb | 12 lb | 4564 | 1,650.00 |
| EKE-500-1 Test kit w/Series E gauge | 500 lb | 12 lb | 4565 | 1,650.00 |
| **Professional Ergonomics testing kit** | | | | |
| EKE-100-2 Test kit w/Series E gauge | 100 lb | 12 lb | 4566 | 2,130.00 |
| EKE-200-2 Test kit w/Series E gauge | 200 lb | 12 lb | 4567 | 2,130.00 |
| EKE-500-2 Test kit w/Series E gauge | 500 lb | 12 lb | 4568 | 2,130.00 |
| ME-500 Force gauge | 500 lb | 3 lb | 4739 | 70.00 |

MARK-10

## Grips

For use with, digital force gauges, digital torque gauges, digital force/torque indicators, and test stands.

| Part Number | | Weight | SKU | List |
|---|---|---|---|---|
| G1001 | Wire terminal grip 0.000” to 0.125” OD | 1 lb | 5889 | $ 325.00 |
| G1001-1 | Wire terminal grip 0.125” to 0.250” OD | 2 lb | 5800 | 325.00 |
| G1001-2 | Wire terminal grip 0.250” to 0.375” OD | 2 lb | 5801 | 325.00 |
| G1002 | Dual roller grip 0” to 0.25” | 1 lb | 5890 | 265.00 |
| G1002-1 | Dual roller grip 0.10” to 0.34” | 2 lb | 5802 | 215.00 |
| G1003 | Mini component grip” | 1 lb | 5891 | 200.00 |
| G1008 | Film and paper grip to 1.25” wide | 1 lb | 5892 | 300.00 |
| G1009 | Compression plate 2” dia | 1 lb | 5893 | 55.00 |
| G1009-1 | Compression plate 3” dia | 1 lb | 5894 | 90.00 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp®
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

MARK-10

## Grips, continued

For use with, digital force gauges, digital torque gauges, digital force/torque indicators, and test stands.

| Part Number | | Weight | SKU | List |
|---|---|---|---|---|
| G1009-2 | Compression plate 2” dia | 2 lb | 5939 | $ 80.00 |
| G1009-3 | Compression plate 3” dia | 2 lb | 5954 | 120.00 |
| G1010 | Pin vise 0.062” to 0.375” dia | 1 lb | 5895 | 140.00 |
| G1010-1 | Pin vise 0.028” to 0.25” dia | 2 lb | 5941 | 130.00 |
| G1010-2 | Pin vise 0.078” to 0.5” dia | 2 lb | 5942 | 150.00 |
| G1011 | Rubber tip | 1 lb | 5896 | 45.00 |
| G1013 | Parallel jaw grip | 1 lb | 5898 | 255.00 |
| G1015-1 | Film and paper grip 3” wide | 1 lb | 5899 | 375.00 |
| G1015-2 | Film and paper grip 5” wide | 1 lb | 5900 | 475.00 |
| G1015-3 | Film and paper grip 7” wide | 1 lb | 5901 | 495.00 |
| G1016-1 | Jacobs chuck for R51 0.028” to 0.25” dia | 1 lb | 5863 | 165.00 |
| G1016-2 | Jacobs chuck for R51 0.062” to 0.375” dia | 1 lb | 5864 | 170.00 |
| G1016-3 | Jacobs chuck for R51 0.5” dia | 1 lb | 5865 | 175.00 |
| G1017 | Bit holder for R51 1.4” dia | 1 lb | 5905 | 175.00 |
| G1019 | Padded attachment, square | 1 lb | 5908 | 55.00 |
| G1020 | Padded attachment, rectangular | 1 lb | 5909 | 75.00 |
| G1021 | Curved padded attachment | 1 lb | 5910 | 95.00 |
| G1022-1 | Jacobs chuck for TST 0.028” to 0.25” dia | 1 lb | 6730 | 225.00 |
| G1022-2 | Jacobs chuck for TST 0.062” to 0.375” dia | 1 lb | 6731 | 250.00 |
| G1022-3 | Jacobs chuck for TST 0.078” to 0.5” dia | 1 lb | 6732 | 280.00 |
| G1023 | Bottle grip for TST 0.050” to 6.0” dia | 1 lb | 6733 | 595.00 |
| G1046 | Pneumatic grip | 1 lb | 5944 | 715.00 |
| G1053 | Univrsal v-jaw grip | 1 lb | 5945 | 395.00 |
| G1056 | Multi jaw grip | 1 lb | 5946 | 350.00 |
| G1058 | Cap grip | 1 lb | 5947 | 475.00 |
| G1061 | Wedge grip 0.75” jaw | 1 lb | 5948 | 690.00 |
| G1061-1 | Wedge grip 0.375” jaw | 1 lb | 5949 | 690.00 |
| G1061-2 | Wedge grip 1.0” jaw | 1 lb | 5950 | 755.00 |
| G1061-3 | Wedge grip 0.75” jaw, rubber face | 1 lb | 5897 | 755.00 |
| G1062 | Minature wedge grip | 1 lb | 5196 | 335.00 |
| G1074 | Vice grip | 1 lb | 5197 | 395.00 |
| G1071 | Score bend fixture set | 1 lb | 5198 | 530.00 |
| G1072 | Opening force fixture set | 1 lb | 5199 | 480.00 |
| G1076 | Wire terminal grip turret | 1 lb | 5200 | 495.00 |
| G1077 | Clevis grip | 1 lb | 5201 | 145.00 |
| G1078 | Miniature filament grip | 1 lb | 5202 | 350.00 |
| G1085 | Dual roller grip adjustable | 1 lb | 5203 | 475.00 |
| G1086 | Coefficient of friction fixture | 1 lb | 5204 | 1,785.00 |
| G1087 | Compression plate 3.78”dia eye end | 1 lb | 5205 | 250.00 |
| G1087-1 | Compression plate 2.20”dia eye end | 1 lb | 5206 | 175.00 |
| G1089 | Syringe fixture | 1 lb | 5207 | 1,135.00 |
| G1090 | High capacity clevis grip eye end | 1 lb | 5208 | 385.00 |
| G1092 | High capacity wire rope grip eye end | 1 lb | 6375 | 1,010.00 |
| G1093 | High capacity wire terminal grip eye end | 1 lb | 6376 | 1,670.00 |
| G1094 | High capacity eccentric roller grip eye end | 1 lb | 6377 | 1,195.00 |

**G1010**
**Pin vise**

**G1013**
**Parallel jaw grip**

**G1002**
**Dual roller grip**

**G1016-2**
**Jacobs chuck**

Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

**G1003**
**Mini component grip**

**G1017**
**Bit holder**

**8G1008**
**Film & paper grip**

**G1009**
**Compression plate**

MARK-10

## Grips, continued

For use with, digital force gauges, digital torque gauges, digital force/torque indicators, and test stands.

| Part Number | | Weight | SKU | List |
|---|---|---|---|---|
| G1095 | Bend fixture eye end | 1 lb | 6378 | 950.00 |
| G1096 | High capacity bend fixture eye end | 1 lb | 6379 | 1,300.00 |
| G1097 | Upper anvil for bend fixture eye end | 1 lb | 6380 | 275.00 |
| G1098 | Loop tack fixture | 1 lb | 6381 | 980.00 |
| G1100 | Parallel jaw grip large eye end | 1 lb | 6382 | 750.00 |
| G1101 | Parallel jaw grip medium eye end | 1 lb | 6383 | 410.00 |
| G1102 | Wire rope grip large eye end | 1 lb | 6384 | 750.00 |
| G1103 | Wire rope grip medium eye end | 1 lb | 6385 | 455.00 |
| G1104 | Flip cap grip | 1 lb | 6386 | 190.00 |
| G1105 | Cork extracion fixture | 1 lb | 6387 | 1,500.00 |
| G1106 | Vise grip self centering | 1 lb | 6801 | 1,195.00 |
| G1107 | Snap hook | 1 lb | 6802 | 130.00 |
| G1109 | 90 degree peel fixture | 1 lb | 6803 | 2,140.00 |
| G1110 | Puncture fixture eye end | 1 lb | 6804 | 3,060.00 |
| G1111 | Ribbon grip eye end | 1 lb | 6805 | 910.00 |

MARK-10

## Attachments

For use with, digital force gauges, digital torque gauges, digital force/torque indicators, and test stands.

| Part Number | | Weight | SKU | List |
|---|---|---|---|---|
| G1024 | Extension rod 5” 10-32 | 1 lb | 5911 | 20.00 |
| G1031 | Extension rod 5” 5/16-18 | 1 lb | 5921 | 25.00 |
| G1024-1 | Extension rod 2” 10-32 | 1 lb | 5912 | 20.00 |
| G1031-1 | Extension rod 2” 5/16-18 | 1 lb | 5922 | 25.00 |
| G1024-2 | Extension rod 1” 10-32 | 1 lb | 5913 | 20.00 |
| G1031-2 | Extension rod 1” 5/16-18 | 1 lb | 5923 | 25.00 |
| G1025 | Chisel point 10-32 | 1 lb | 5914 | 20.00 |
| G1032 | Chisel point 5/16-18 | 1 lb | 5924 | 25.00 |
| G1026 | Cone point 10-32 | 1 lb | 5915 | 20.00 |
| G1033 | Cone point 5/16-18 | 1 lb | 5925 | 25.00 |
| G1027 | V-groove 10-32 | 1 lb | 5916 | 20.00 |
| G1034 | V-groove 5/16-18 | 1 lb | 5926 | 25.00 |
| G1029 | Flat head 10-32 | 1 lb | 5919 | 20.00 |
| G1036 | Flat head 5/16-18 | 1 lb | 5928 | 25.00 |
| G1028 | Hook small 10-32 | 1 lb | 5917 | 20.00 |
| G1038 | Hook medium 10-32 | 1 lb | 5930 | 15.00 |
| G1035 | Hook large 5/16-18 | 1 lb | 5927 | 25.00 |
| G1042 | Hook extra large 1/2-20 | 1 lb | 6806 | 30.00 |
| G1030 | Adapter 5/16 to 10-32 | 1 lb | 5920 | 20.00 |
| G1037 | Coupling 5/16-18 | 1 lb | 5929 | 20.00 |
| G1039 | Coupling 10-32 | 1 lb | 5931 | 15.00 |
| G1040 | Adapter 5/16 to 5/16-18 | 1 lb | 5932 | 20.00 |
| G1041 | Adapter 5/16 to 1/2-20 | 1 lb | 5933 | 20.00 |
| G1018-1 | Adapter # 10-32 UNF 200 lb | 1 lb | 5906 | 110.00 |

MARK-10

## Attachments, continued

For use with, digital force gauges, digital torque gauges, digital force/torque indicators, and test stands.

| Part Number | | Weight | SKU | List |
|---|---|---|---|---|
| G1018-2 | Swivel adapter 5/16-18 UNC 500 lb | 1 lb | 5907 | $ 130.00 |
| G1044 | Adapter plate TSF/TST 1/2-20F | 1 lb | 6229 | 55.00 |
| G1047 | Adapter 10-32-to M4F | 1 lb | 6230 | 25.00 |
| G1048 | Adapter M4M to 10-32 | 1 lb | 6231 | 25.00 |
| G1049 | Adapter M6M to 5/16-18 | 1 lb | 6232 | 25.00 |
| G1050 | Adapter 4-40M to 10-32F | 1 lb | 6233 | 25.00 |
| G1051 | Adapter4-40M to 10-32M | 1 lb | 6234 | 25.00 |
| G1054 | Adapter 10-32F to M6M | 1 lb | 6235 | 25.00 |
| G1055 | Adapter G1053 to stand | 1 lb | 6236 | 60.00 |
| G1057 | Adapter M6F to 10-32F | 1 lb | 6237 | 25.00 |
| G1059 | Adapter 5/16-18F to 1/2-20F | 1 lb | 6238 | 25.00 |
| G1060 | Adapter 10-32M to 10-32M | 1 lb | 6239 | 25.00 |
| G1063 | Adapter10-32M to 10-32F | 1 lb | 6240 | 25.00 |
| G1066 | Adapter 5/16-18F to 1/2-20M | 1 lb | 6756 | 25.00 |
| G1067 | Adapter 1/2-20M to 10-32F | 1 lb | 6757 | 25.00 |
| G1068 | Adapter G1023 to G1045 | 1 lb | 6758 | 80.00 |
| G1069 | Adapter 5/16-18F to 1/4-28M | 1 lb | 6759 | 25.00 |
| G1113 | Adapter M3M to 4-40F | 1 lb | 6761 | 25.00 |
| AC1082 | Stud jam nut set 10-32 | 1 lb | 6762 | 10.00 |
| AC1082-1 | Stud jam nut set 5/16-18 | 1 lb | 6763 | 10.00 |
| AC1082-2 | Stud jam nut set 1/2-20 | 1 lb | 6764 | 10.00 |

**90 degree peel fixture**

**Cork extraction**

MARK-10

## Eye end adapters

For use with, digital force gauges, digital torque gauges, digital force/torque indicators, and test stands.

| Part Number | | Weight | SKU | List |
|---|---|---|---|---|
| G1079 | Lock ring | 1 lb | 6765 | $ 25.00 |
| G1080 | Anchor pin | 2 lb | 6766 | 25.00 |
| G1081 | Eye end 10-32M | 2 lb | 6767 | 35.00 |
| G1081-1 | Eye end 5/16-18M | 2 lb | 5415 | 35.00 |
| G1081-2 | Eye end 1/2-20M | 2 lb | 5416 | 35.00 |
| G1081-3 4 | Eye end 1/4-28M | 2 lb | 5417 | 35.00 |
| G1082 | Eye end 10-32F | 2 lb | 5418 | 35.00 |
| G1082-1 | Eye end 5/16-18F | 2 lb | 5419 | 35.00 |
| G1083 | Eye end adapter 10-32M | 2 lb | 5420 | 35.00 |
| G1083-1 | Eye end adapter 5/16-18M | 2 lb | 5421 | 35.00 |
| G1083-2 | Eye end adapter 1/2-20M | 2 lb | 5422 | 35.00 |
| G1084 | Washer 0.20” | 2 lb | 5423 | 25.00 |
| G1084-1 | Washer 0.32” | 2 lb | 5424 | 25.00 |
| G1084-2 | Washer 0.51” | 2 lb | 5425 | 25.00 |
| G1088 | Spanner wrench | 2 lb | 5787 | 70.00 |
| AC1047 | Base/load cell adapter kit 10-32M | 2 lb | 5788 | 95.00 |
| AC1047-1 | Base/load cell adapter kit 5/16-18M | 2 lb | 5789 | 95.00 |
| AC1047-2 | Base/load cell adapter kit 1/2-20M | 2 lb | 5790 | 95.00 |

**Snap hook**

**Puncture fixture**



Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

**09-1162**
**Cable**

## Eye end adapters, continued

For use with, digital force gauges, digital torque gauges, digital force/torque indicators, and test stands.

| Part Number | | Weight | SKU | List |
|---|---|---|---|---|
| G1047-3 | Base/load cell adapter kit 1/4-28M | 1 lb | 5711 | $ 70.00 |
| AC1047-4 | Load cell adapterR03 10-32M | 2 lb | 5792 | 110.00 |
| G1046 | Pneumatic grip 10-32F | 2 lb | 5793 | 715.00 |
| AC1046-1 | Grip adapter kit 5/16-18M | 2 lb | 5794 | 55.00 |
| G1046-2 | Grip adapter kit 1/2-20M | 2 lb | 5795 | 35.00 |
| AC1045 | Force gauge adapter 10-32F | 2 lb | 5796 | 120.00 |
| AC1045-1 | Force gauge adapter 5/16/18F | 2 lb | 5797 | 120.00 |
| AC1045-2 | Force gauge adapter 1/2-20M | 2 lb | 5718 | 120.00 |

**09-1066**
**Mitutoyo**

## Cables & communication adapters

For use with, digital force gauges, digital torque gauges, digital force/torque indicators, and test stands.

| Part Number | | Weight | SKU | List |
|---|---|---|---|---|
| AC1114 | Cable 7/5/4 to ESM303 | 1 lb | 5724 | $ 175.00 |
| AC1115 | Cable 7/5 to ESM303H | 1 lb | 5725 | 175.00 |
| AC1107 | USB cable B to A | 1 lb | 5727 | 30.00 |
| AC1109 | Cable serial 7/5/4 to RS232 DB9 | 1 lb | 7652 | 125.00 |
| AC1110 | Cable 5/4 to Mitutoyo | 1 lb | 7653 | 175.00 |
| AC1111 | Cable USB 7/5/4/3 to PC | 1 lb | 5764 | 30.00 |
| AC1112 | Cable analog 7/5/4 | 1 lb | 7654 | 150.00 |
| AC1114 | Serial cablestand to PC | 1 lb | 5713 | 50.00 |
| AC1108 | Cable gauge to stand | 1 lb | 5714 | 175.00 |
| AC1105 | Cable Mitutoyo | 1 lb | 5940 | 150.00 |
| RSU100 | Communications adapter RS232 to USB | 1 lb | 5849 | 135.00 |
| MU100 | Adapter Mitutoyo to RS232 9pin | 1 lb | 5943 | 350.00 |

**MU100**
**Adapter Mitutoyo**

## Legacy cables

For use with, digital force gauges, digital torque gauges, digital force/torque indicators, and test stands.

| Part Number | | Weight | SKU | List |
|---|---|---|---|---|
| 09-1047 | Cable legacy gauge to Mitutoyo | 1 lb | 5856 | $ 80.00 |
| 09-1048A | Cable serial to PC DB-9 | 1 lb | 5937 | 80.00 |
| 09-1049 | Cable analog dual banana plug | 1 lb | 5938 | 80.00 |
| 09-1143 | Muilti function cable | 1 lb | 5967 | 135.00 |

## Software

For use with, digital force gauges, digital torque gauges, digital force/torque indicators, and test stands.

| Part Number | | SKU | List |
|---|---|---|---|
| 15-1004 | MESUR gauge single license | 7704 | $ 560.00 |
| 15-1004-5 | MESUR gauge 5 licenses | 7705 | 2,265.00 |
| 15-1005 | MESUR gauge Plus | 7706 | 710.00 |
| 15-1005-5 | MESUR gauge Plus 5 licenses | 7707 | 2,810{.00 |
| 15-1006 | Upgrade MESUR gauge to MESUR gauge Plus | 7708 | 225.00 |

Prices are subject to change without notice. See website for current prices. Other items are available from the manufacturers, please call for prices.



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp®
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

MARK-10

## Accessories & related items

For use with, digital force gauges, digital torque gauges, digital force/torque indicators, and test stands.

| Part Number | | Weight | SKU | List |
|---|---|---|---|---|
| 08-1026 | Replacement battery 8.4V NiMH | 2 lb | 5951 | $ 20.00 |
| AC1030 | AC adapter/charger 110V US | 2 lb | 5952 | 45.00 |
| AC1031 | AC adapter/charger 220V Europe | 2 lb | 5953 | 45.00 |
| AC1032 | AC adapter/charger 220V UK | 2 lb | 5979 | 45.00 |
| AC1035 | AC adapter/charger 220V Australia | 2 lb | 5980 | 45.00 |
| AC1002 | Handle grip 7/5/4 double grip | 2 lb | 5955 | 145.00 |
| AC1002-1 | Handle grip 7/5/4 single grip | 1 lb | 5956 | 135.00 |
| AC1003 | Handle grip 2/3 double grip | 1 lb | 5957 | 120.00 |
| AC1003-1 | Handle grip 2/3 single grip | 1 lb | 5958 | 100.00 |
| AC1004 | Mounting kit indicator TT03 to TS | 1 lb | 5705 | 100.00 |
| AC1006 | Mounting kit R52 | 1 lb | 5843 | 75.00 |
| AC1007 | Mounting kit R51/TT03 | 1 lb | 5961 | 135.00 |
| AC1008 | Stand indicator TT03 | 1 lb | 5503 | 160.00 |
| AC1010 | Mounting kit MR55 | 1 lb | 5963 | 135.00 |
| AC1014 | Jacobs chuck R52 0.062”-0.375” | 2 lb | 5844 | 195.00 |
| AC1014-1 | Jacobs chuck R52 0.028”-0.25” | 2 lb | 5594 | 195.00 |
| AC1015 | Mounting kit R51 to TST | 2 lb | 5959 | 75.00 |
| AC1016 | Mounting kit R55 to TST | 2 lb | 5960 | 110.00 |
| AC1016-1 | Mounting kit R55 to TST | 2 lb | 4210 | 110.00 |
| AC1018 | Mounting kit R01 to TST | 2 lb | 4211 | 175.00 |
| AC1019 | Air connection kit G1046 | 1 lb | 4212 | 285.00 |
| AC1044 | Maintenance kit G1046 | 2 lb | 4213 | 150.00 |
| AC1020 | Gauge mounting kit DFE | 2 lb | 4214 | 110.00 |
| AC1021 | Gauge mounting kit DFM | 2 lb | 4215 | 110.00 |
| AC1022 | Gauge mounting kit DFIS | 2 lb | 4216 | 110.00 |
| AC1023 | Gauge mounting kit AFG | 2 lb | 4217 | 110.00 |
| AC1024 | Gauge mounting kit ESM | 2 lb | 4218 | 110.00 |
| AC1025 | Gauge mounting kit FGV | 2 lb | 4219 | 110.00 |
| AC1037 | Gauge mounting kit DFE | 2 lb | 4594 | 150.00 |
| AC1038 | Gauge mounting kit DFM | 2 lb | 4595 | 150.00 |
| AC1039 | Gauge mounting kit DFIS | 2 lb | 4596 | 150.00 |
| AC1040 | Gauge mounting kit AFG | 2 lb | 4597 | 150.00 |
| AC1041 | Gauge mounting kit TSA | 2 lb | 4598 | 150.00 |
| AC1042 | Gauge mounting kit FGV | 2 lb | 4599 | 150.00 |
| AC1061 | Gauge mounting kit TCD | 2 lb | 4600 | 90.00 |
| AC1069 | Gauge mounting kit Mecmesin | 2 lb | 4601 | 90.00 |
| AC1029 | Axial compressor | 2 lb | 4602 | 295.00 |
| AC1043 | HI Lo limits indicator | 2 lb | 4603 | 125.00 |
| AC1036 | Calibration kit TT01 (no weights) | 2 lb | 4262 | 760.00 |
| AC1049 | Calibration kit WT3-201/M (no weights) | 2 lb | 7532 | 1,000.00 |
| AC1051 | Foot switch 7/M71 | 2 lb | 7455 | 205.00 |
| AC1052 | Mounting plate 500 lb | 2 lb | 7456 | 60.00 |
| AC1058 | Mounting plate 2,000 lb | 2 lb | 7457 | 90.00 |
| AC1053 | Set 4 blanks G1089 syringe fixture | 2 lb | 7458 | 175.00 |
| AC1062 | Mounting kit indicator load cell ESM | 2 lb | 7459 | 265.00 |

**AC10002**
**Handle grip**

**AC1014**
**Jacobs chuck STC**

**AC1006**
**Mounting kit R52**

**AC1008**
**Indicator stand TT03**



Prices are subject to change without notice. See website for current prices.

Other items are available from the manufacturers, please call for prices.

**AC1062**
**Mounting kit indicator ESM**

**Calibration kit**

## Accessories & related items, continued

For use with, digital force gauges, digital torque gauges, digital force/torque indicators, and test stands.

| Part Number | | Weight | SKU | List |
|---|---|---|---|---|
| AC1065 | Load cell mounting hardware ESM1500/750 | 2 lb | 8422 | $ 130.00 |
| AC1067 | Rollers for bend fixtures 1mm set of 4 | 2 lb | 8423 | 90.00 |
| AC1067-1 | Rollers for bend fixtures 2mm set of 4 | 2 lb | 8424 | 90.00 |
| AC1067-2 | Rollers for bend fixtures 5mm set of 4 | 2 lb | 8425 | 90.00 |
| AC1067-3 | Rollers for bend fixtures 10mm set of 4 | 2 lb | 7804 | 90.00 |
| AC1068 | Test strips G1098 | 2 lb | 7805 | 195.00 |
| AC1070-1 | Jaws for G1100 2.36” | 2 lb | 7806 | 335.00 |
| AC1070-2 | Jaws for G1100 3.94” | 2 lb | 7807 | 380.00 |
| AC1071-1 | Jaws for G1100 1.18” | 2 lb | 7808 | 140.00 |
| AC1071-2 | Jaws for G1100 1.97” | 2 lb | 7809 | 210.00 |
| AC1071-3 | Jaws for G1100 3.15” | 2 lb | 7810 | 285.00 |
| AC1071-4 | Jaws for G1100 3.94” | 2 lb | 7811 | 330.00 |
| AC1073-1 | Inline adapter 3/2 force gauge | 2 lb | 7812 | 140.00 |
| AC1073-2 | Inline adapter 7/5/4 force gauge | 2 lb | 7813 | 185.00 |
| AC1073-3 | Inline adapter E force gauge | 2 lb | 8321 | 185.00 |
| AC1074 | Remote emergency switch ESM | 2 lb | 8322 | 310.00 |
| AC1076-1 | Mounting posts G1086 ESM750 | 2 lb | 8323 | 60.00 |
| AC1076-2 | Mounting posts G1086 ESM1500 | 2 lb | 8324 | 60.00 |
| AC1077 | Connector covers kit TT01 | 2 lb | 8325 | 25.00 |
| AC1078 | Adjustable angle pulley adapter G1109 | 2 lb | 8326 | 500.00 |
| AC1079 | Adjustable angle mount G1109 | 1 lb | 8327 | 550.00 |
| AC1080 | Adapter G1023 to G1109 | 1 lb | 8328 | 150.00 |
| AC1087 | Adapter G1109 to ESM | 1 lb | 8329 | 175.00 |
| 20-1025 | Chuck key 1/2 | 1 lb | 8330 | 10.00 |
| 20-1025-1 | Chuck key 1/4 3/8 | 1 lb | 8331 | 10.00 |

## Services

For use with, digital force gauges, digital torque gauges, digital force/torque indicators, and test stands.

| Part Number | | SKU | List |
|---|---|---|---|
| SVC001 | Calibration w/NIST certificate | 5965 | $ 285.00 |
| SVC006 | Load cell w/cal, NIST cert. | 5968 | 495.00 |
| SVC008 | Sensor w/cal, NIST cert | 5970 | 670.00 |
| SVC013 | Non warranty repair force or torque | 5756 | 265.00 |
| SVC009 | Gauge non warranty repair | 5757 | 160.00 |
| SVC011 | Evaluation fee if quoted repair charge is refused | 5758 | 105.00 |
| SVC014 | UpgradeBGI to Plug & test w/NIST cert | 5759 | 295.00 |
| CERT | NIST certificate with data | 5760 | 85.00 |





www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

Totalcomp®
Scales & Balances

13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718

# International Wire Transfers

| | |
|---|---|
| Beneficiary Bank | ConnectOne Bank |
| Beneficiary Bank Address | 301 Sylvan Ave Englewood Cliffs NJ 07632 |
| Beneficiary Bank Swift # | CNNOUS33 |
| Beneficiary Name | Totalcomp Inc |
| Beneficiary Address | 13-01 Pollitt Dr Ext Fair Lawn NJ 07410 |
| Beneficiary Customer # | xxxxxxxxxxxx |

Please contact us for Customer Account #.

# Domestic ACH **(Automated Clearing House)**

| | |
|---|---|
| Bank Name | ConnectOne Bank |
| Bank Address | 301 Sylvan Ave Englewood Cliffs NJ 07632 |
| Bank ABA # | 021213944 |
| Beneficiary Name | Totalcomp Inc |
| Beneficiary Address | 13-01 Pollitt Dr Ext Fair Lawn NJ 07410 |
| Beneficiary Account # | xxxxxxxxxxxx |

Please contact us for Customer Account #.

# Tarjetas de Crédito

El despacho se hará el mismo día

Solo aceptamos VISA y MASTERCARD

Nota: Proveer siempre el número de cuenta y la Fecha de Vencimiento.

Estimado cliente tener en cuenta que: Mastercard y Visa cobran el 3.15% mas $1.15 por transacción. Estos costos serán agregados a su factura.

# Con Cheque

Cheque de banco de USA o Money Order.

Despachamos cuando el cheque arribe a nuestras oficinas. Por ejemplo si lo envián por servicio courier como DHL o FedEx, el cheque llegaría en 2 ó 3 días a Totalcomp.

Cheque a nombre de: Totalcomp Inc

Enviarlo a: Totalcomp Inc
13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
USA

# Cheque por fax/email

Agilizan sus ordenes de compras

En Totalcomp ahora tenemos el nuevo sistema de cheques por fax que permitira el despacho de los productos el mismo día. Tambien agiliza los pagos de facturas vencidas, y ahorra gastos de transferencia y de courier cuando envian un cheque a nuestras oficinas.

¿Como trabaja?

Ustedes consiguen un cheque de un banco local con nexos bancarios Norteamericanos en Dólares Americanos y lo envían vía fax a Totalcomp, con una autorización firmada por el dueño de la cuenta que diga lo siguiente:

Este cheque autoriza cargar a nuestra cuenta la suma de $_____

Una vez que lo tengamos tomaremos el número de cuenta del cheque, el número de tránsito y el número MICR que identifica el banco original. Luego imprimimos un cheque con esos datos y lo depositamos normalmente. Esta transaccion es completamente legal y es permitida en los Estados Unidos.

Una vez que tengamos el cheque por fax podremos despachar el mismo día. Ustedes se ahorran los gastos de DHL, FEDEX, tranferencia, o cargos del 2.8% cuando pagan con Visa o MasterCard.

# Terms

Your choice of payment.

1. Check or money order with order.

2. Net 30 days for approved credit customers. If you desire a Totalcomp charge account, simply request a credit application with your next order (or at any time) and we will ship your order when your credit is approved.

3. C.O.D. will be delivered by UPS or Federal Express. They will collect total charges which will include merchandise, freight and handling.

Prices are FOB Fair Lawn, New Jersey or FOB Factory and are subject to change without notice. Orders will be filled with prices in effect at the date of shipment.
Minimum order is $20.00 excluding shipping charges.

# Stock

Your components will be shipped within 24 hours from when we receive your order.
We normally carry an ample supply of every item on our stock shelf. It is very infrequent that our supply is depleted to zero due to unusual requests from our other customers.

# Shipping

| | |
|---|---|
| UPS . . . . . | Your order will be shipped UPS whenever possible, unless you request a different method of shipment. Maximum 150 lbs per carton. |
| UPS 2nd day air . . . | Air freight via UPS. It is a guaranteed 2-day delivery not including Saturday or Sunday. |
| UPS 3 day air. . . . . | Ground service via UPS. It is guaranteed 3 day delivery not including Saturday and Sunday. |
| UPS Next day air . . . | Air freight via UPS. It is a guaranteed 1-day delivery not including Sunday. |
| Express mail . . . . . | Air freight via U S Postal Service. Guaranteed next day delivery not including Sunday. |
| Air Freight . . . . . | Air freight via Federal Express, DHL and other independent air cargo service. Normally next day service. Extra cost for Saturday delivery. No Sunday deliveries. |
| Truck . . . . . | When shipping load cells and other parts by truck specify shipping class as SCALES NOI CLASS 85. |

# Warranty

Your Customer Warranty is the standard manufacturer's warranty, which is normally 1 year from date of shipment.

No prior return authorization is required.

Return to us the defective items. Enclose a note with the model number, serial number, invoice number and date of purchase and a brief description of defect.

Defective part will be forwarded to the manufacturer for evaluation. Customer will be advised of the status.

No credit will be issued unless offered by the manufacturer.

# Return Policy

All merchandise must be authorized prior to return. No return will be accepted without a **Return Authorization Number**, except for warranties.

If the wrong part was ordered:
1. A 20% restocking charge plus shipping charges will apply.
2. The merchandise being returned must be returned within 2 weeks of original shipping date.
3. The Merchandise being returned must be unused and received in new condition. If merchandise appears to have been used or received in poor or damaged condition, a refurbishing charge will be applied before credit is given.

If the wrong part was shipped:
1. The correct merchandise will be shipped at once.
2. Full credit will be issued upon return of incorrect merchandise.

# Damaged in Shipment

Merchandise that has been damaged in shipment must be reported to the freight carrier immediately.

Do not return the merchandise until after the freight carrier has inspected the damage. Keep all the original packaging material for the inspection. The freight carrier will not honor a claim for damage if the merchandise is not as you received it.

After the freight carrier has inspected the damage and has given us approval, we will give you a **Return Authorization Number**.

# Email

sales@totalcomp.com
purchasing@totalcomp.com
accountspayable@totalcomp.com
accountsreceivable@totalcomp.com

# Index


110ES 128
110RH 127
1119-DO 174
1124 179
1704B 170
2200 49
2200CW 76
235 112
2400-12 174
30007 122
310 175
311 175
337 98
400KL 98
4300 77
500703-0013 115
520B 92
64 88
6550 96
6855 96
7000 49
7000XL 48
710 173
7300 61
7400 47
7500 83
7600 83
8000XL 50
8001-MA 177
8011-MA 177
80410-00 176
820 112
8260DD-T-H 113
854F 178

**A**

A&D, AD-1683 162
A&D, AD-4212A 132
A&D, BM 160
A&D, EJ 10
A&D, EK 7
A&D, EK-G 10
A&D, EK-i 7
A&D, EK-L 153
A&D, EW 8
A&D, FCi 80
A&D, FG 26
A&D, FS-i 75
A&D, FV 9
A&D, FW 9
A&D, FX-i 131
A&D, FX-iWP 133
A&D, FZ-i 133
A&D, FZ-iWP 132
A&D, GF-A 134
A&D, GF-P 134
A&D, GH 161
A&D, GP 152
A&D, GR 162
A&D, GX 129, 152
A&D, GX-A 130
A&D, HCi 79
A&D, HD 79
A&D, HL 5
A&D, HLi 5
A&D, HR-AZ/HR-A 160
A&D, HT 6
A&D, HV 23
A&D, HV-G 25
A&D, HV-WP 25
A&D, HW-CEP 90
A&D, HW-G 24, 25
A&D, MC 159
A&D, MF 147
A&D, ML 147
A&D, MS 147
A&D, MX 147
A&D, SC 27
A&D, SE 27
A&D, SJ 6, 11
A&D, SK 11
A&D, SK-WP 9
A&D, SW 28
A520BT 92
ABW 12
Acculab, ALC 135
Acom, PW-200 65
AD-1683 162
AD-4212A 132
Adam, CCT 81
Adam, CPW 28
Adam, GFC 81
Adam, HCB 136
Adam, IHS 121
Adam, LBX 12
Adam, LHS 121
Adam, PGL 135
Adam, PGWe 158
Adam, SHS 115
Adam, WBW 12
Adventurer service parts 141
ALC 135
Analytical 158, 159, 160, 161, 162, 163, 164, 165, 166, 167, 168, 169
Animal 91
Anyload, 100ES 128
Anyload, 100RH-WL 127
AP1 67
APS 49
AV 140
AW-WLG 64
AW-WSM 64
AWT05 122
AX 139, 163
AY123 145

**B**

Baggage 87, 88, 89
Bench 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22
Bench/Floor 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54
Benchmark 170
BG2 187
BM 160
Brecknell, 235 112
Brecknell, CS 120
Brecknell, Electro Samson 114
Brecknell, PS500 91
BW 52

**C**

C 86
C11P 30
Cardinal, C 86
Cardinal, CIM 74
Cas, AP1 67
Cas, BW 52
Cas, Caston II 118
Cas, Caston III 119
Cas, CCB 117
Cas, CL5000 69
Cas, CL5500 69
Cas, CPS 104
Cas, DL 52
Cas, EB 71
Cas, EC 82
Cas, EC2 82
Cas, ED 13
Cas, IE 118
Cas, LP-1000 68
Cas, NC1 117
Cas, PB 53
Cas, PD-II POS 61
Cas, RW-2601P 108
Cas, RW-S/L 107
Cas, S2000 71
Cas, S2000JR 70
Cas, SC 82
Cas, SW 15
Cas, SW-RS 14
Cas, SW-W 15
Cas, SW-Z 14
CAST2-PLUS 118
Caston III 119
CCB 117
CCI, FS 172
CCT 81
Chatillon, 8260DD-T-H 113
Chatillon, IN-50 113
CIM 74

# Index


CL5000 69
CL5500 69
Compact 2, 3, 4, 5
Computing 67, 68, 69, 70, 71, 72, 73
Counting 78, 79, 80, 81, 82, 83, 84, 85, 86
Covers 182, 183
CPS 104
CPW 28
CQ 43
CR 4
Crane 115, 116, 119, 120, 121
CS 120
CS1500 116
CS200 115
CS750 116
CW250 58
CX 3

**D**

D31P 31
D32XW 32
D33P 33
D33XW 34, 35
D51P 36
D52P 40, 42
D52XW 37, 38, 39, 41
D71P 42
DCS-CD 113
Detecto, 6500 96
Detecto, Low Profile 29
Detecto, Personal Scale 96
Detecto, Physician Scale 98
Detecto, Portable Beam 178
Detecto, RW 59
Detecto, TB 170
Dial type spring scales 177
Dillon, AP 122
Dillon, ED junior 123
Dillon, EDxtreme 123
Dillon, Quick-Check 122
DL 52
DLP-300 73
DMS 89
Doran, 2200 49
Doran, 2200CW 76
Doran, 4300 77
Doran, 7000 49
Doran, 7000XL 48
Doran, 7400 47
Doran, 8000XL 50
Doran, DBS 89
Doran, DMS 89
Doran, DS2100 99
Doran, DS5250 100
Doran, MVP 50
Doran, PC400 62
Doran, PC500 63
Doran, PFS7000 56
DP-6900 51
DR 29
DS 89
DS2100 99
DS5250 100
Dynamometer 123, 124, 125, 126, 127, 128
Dynamometers 122

**E**

EB 71
EC 82, 84
EC2 82
ED 13
EDjr 123
EDx 123
EJ 10
EK 7
EK-G 10
EK-L 153
EK3 196
Electro Samson 114
EP 137
ES 195
EW 8
EX 138, 155
EX1 164

**F**

Fairbanks, 1124 179
Fairbanks, Portable Beam Scale 179
FCi 80
FD 62
FG 26
Floor 55, 56, 57, 58
FormasDePago 203
FS 172
FS-i 75
FV 9
FW 9
FX 131
FX-iWP 133
FZ 133
FZ-iWP 132

**G**

GF-A 134
GF-P 134
GFC 81
GH 161
GL 53
Globe Scientific, Weighing Dishes 181
GR 162
grip 196, 198
GX 129, 152
GX-A 130

**H**

Hanging 112, 113, 114
Hazardous 90
HC 79
HCB 136
HD 79
Health 92, 93, 94, 95, 96, 97, 98
Healthometer, 400 98
HI 146
HL 5
HR 160
HT 6
HV 23
HV-G 25
HV-WP 25
HW 23, 24
HW-CEP 90
HW-G 25

**I**

IE 118
IHS 121
IN-50 113
Index 205, 206, 207, 208
Industrial 151, 152, 153, 154, 155, PB 156, 157
Intercomp, CS1500 116
Intercomp, CS200 115
Intercomp, CS750 116
Intercomp, CW250 58
Intercomp, LP600 109
Intercomp, PT300 111
Intercomp, PT300DW 110
Intercomp, PW800 104
Intercomp, SW 106
Intercomp, TL6000 125
Intercomp, TL6000-RF 124
Intercomp, TL8500 126

**J**

JE 103
Jewelry 102, 103
JS 103

**L**

LBX 12
LC:127 23
LC:4102 24
LC:4103 24
LHS 121
Lift Truck 105
LP-1000 68
LP600 109
LTEF-16 105
LTS, LTEF 105

**M**

M2 187
M3 186
M4 186
M5 184
M7 185
MA35 151
Mark-10 185, 186, 187, 188, 189, 190, 192, 193, 194, 195, 196, 197, 198, 199, 200, 201, 202
Mark-10, Accessories 201, 202
Mark-10, Attachments 198, 199
Mark-10, BG 187
Mark-10, Cables & communication 200
Mark-10, Ergonomics 196
Mark-10, Eye end adapters 199, 200
Mark-10, Grips 196, 197, 198
Mark-10, Legacy cables 200
Mark-10, M2 187
Mark-10, M3 186
Mark-10, M4 186
Mark-10, M5 184
Mark-10, M7 185
Mark-10, Manual test stands 195
Mark-10, Motorized test stands 193, 194
Mark-10, MR04 191
Mark-10, MR50 191
Mark-10, MR51 192
Mark-10, MR52 192
Mark-10, MR55 193
Mark-10, MTT01 189
Mark-10, MTT02 189
Mark-10, MTT05 190
Mark-10, Plug & Test indicator & sensors 190, 191
Mark-10, Services 202
Mark-10, Software 200
Mark-10, TT03 188
Mark-10, WT3 188
MB120 148
MB200 148
MB23 149
MB27 149
MB32 150
MB62 150
MB90 149
MB92 151
MBS 94
MC 159
ME 196
Mechanical 173, 174, 175, 176, 177, 178, 179
Mechanical Portion 170, 171, 172
MF 147
MH-200 4
ML 147
Moisture 147, 148, 149, 150
MR 190
MR03 191
MR04 191
MR50 191
MR51 192
MR52 192
MR55 193
MS 147
MSI, hanging scale 115
MSI, Service parts 120
MTT01 189
MTT02 189
MTT05 190
MVP 50
MVS1 53
MW1P 143
MX 147

**N**

NC1 117
NCI scales service parts 101
NV 141, 153
NVT 154

**O**

Ohaus Adventurer Analytical, AX 163
Ohaus Adventurer Precision, AX 139, 141
Ohaus Analytical, EX 164
Ohaus Analytical, PX 166
Ohaus Explorer Industrial, EX 155
Ohaus Explorer Precison, EX 138
Ohaus Explorer Pro, EP 137
Ohaus Navigator Industrial, NV 153
Ohaus Navigator Precision, NV 141
Ohaus Semi Micro, PX 166
Ohaus, AV 140
Ohaus, Catapult 1000 30
Ohaus, Cent-O-Gram® 175
Ohaus, CQ31 43
Ohaus, CR 4
Ohaus, CX 3
Ohaus, Defender 3000 32, 33, 34, 35
Ohaus, Defender 5000 37, 38, 39, 40, 41, 42
Ohaus, Defender 5000 Square 36
Ohaus, Dial type spring 177
Ohaus, Dial-O-Gram® 175
Ohaus, Digital Field Test 31
Ohaus, EC 84
Ohaus, ES 31
Ohaus, FD 62
Ohaus, Field Test 174
Ohaus, Harvard Trip 176
Ohaus, JE 103
Ohaus, JS 103
Ohaus, MB120 148
Ohaus, MB200 148, 150
Ohaus, MB23 149
Ohaus, MB27 149
Ohaus, MB62 150
Ohaus, MB90 149, 151
Ohaus, NVT 154
Ohaus, PA 140
Ohaus, Pioneer 140
Ohaus, PR 165
Ohaus, Primer Balance 176
Ohaus, PS 2
Ohaus, Pull type spring 177
Ohaus, Ranger 3000 16
Ohaus, Ranger 3000 Counting 84
Ohaus, Ranger 4000 18
Ohaus, Ranger 4000 Counting 85
Ohaus, Ranger 7000 18
Ohaus, School Balance 176
Ohaus, Scoops 181
Ohaus, SD 30
Ohaus, SJX 102
Ohaus, Solution Balance 174
Ohaus, SPX 17
Ohaus, STX 17
Ohaus, TAJ 102
Ohaus, Triple Beam 173
Ohaus, Triple Beam Junior 173
Ohaus, Triple Pro 175
Ohaus, Valor 1000 19
Ohaus, Valor 2000 20
Ohaus, Valor 3000 20
Ohaus, Valor 4000 21
Ohaus, Valor 7000 21
Ohaus, YA 102
Over/Under 74, 75, 76, 77

**P**

P Spring scale 171
PA 140
package 55
Pallet truck 104
PB 53
PC 60
PC-40L 72
PC400 62
PC500 63
PD-II 61
Penn Scale, 820 112
Penn Scale, Heirloom Scale 170
Penn Scale, P 171
Penn Scale, PS 66
Pennsylvania, 64 88
Pennsylvania, 7300 61
Pennsylvania, 7500 Counting 83
Pennsylvania, 7600 Counting 83
PFS7000 56
PGL 135
PGW 158
Point of Sale 61
Portion/Food 62, 63, 64, 65
Postal 101
PPC-200W-II 64
PPC-300-II 63
PPC-300WP-II 63
PR 165
Practum 144
Precision 129, 130, 131, 132, 134, 135, 136, 137, 138, 139, 140, 141, 142, 143, 144, 145, 146

# Index


PS 2, 66
PS500 91
PT300 111
PT300DW 110
Pull type spring scales 177
PW-200 65
PW800 104
PX 140, 166

**Q**

Quintix 168

**R**

R31P 16
R41ME 18
R71MD 18
Race car 106
Radwag, WLC 142, 157
Radwag, WLY 157
Radwag, WTC 142
RC31P 84
RC41 85
Rice Lake, RLP-S 66
RLP-S 66
RW 59, 107
RW-2601P 108

**S**

S2000 71
S2000JR 70
Sartorius, CP 143
Sartorius, M-Prove 145
Sartorius, MA35 151
Sartorius, Midrics 143
Sartorius, Practum 144
Sartorius, Quintix 168
Sartorius, Secura 167
Sartorius, Signum 156
Sartorius, TE 145
SB1200 176
SC 27, 82
scoop 181
Scoops 180, 181
SD 30, 176
SE 27
SECURA 167
Service parts for CP 143
Service parts for MSI Crane Scale 120
Setra, HI 146
Setra, SI 146
Setra, Supercount 86
Shimadzu 158
SHS 115
SI 146
SIWADCP 156
SJ 6, 11
SJX 102
SK 11
SK-WP 9
SPS 101
SPX 17
SRP 60
STX 17
supercount 86
SW 14, 15, 28, 106
SW-RS 14

**T**

T 90
T29 8
TAJ 102
Tanita, TLC 74
TB 44, 46, 170
TBL 46
TBP 45
TBS 87
TBT 45, 46
TBW 54
TBWS 54
TCM2 78
TDS 57
TE212 145
TEI 29
Terms 204
TFC 182
THS 114
TJ 173
TJA-203 169
TL6000 125
TL6000-RF 124
TL8500 126
TLC 74
TM101 94
TM301 93
TM302 93
TM501 95
TM503 97
TM701 97
TM901 91
TM902 91
Toplload 133
Tor-Rey, PC-40L 72
Totalcomp, Baggage Scale Kit 87
Totalcomp, Clear Flexible Covers 182, 183
Totalcomp, Floor Scale 55
Totalcomp, Hazardous Floor Base 90
Totalcomp, MBS 94
Totalcomp, MH 4
Totalcomp, Scoops 180
Totalcomp, T29 8
Totalcomp, TB 44
Totalcomp, TBL 46
Totalcomp, TBP 45
Totalcomp, TCM2 78
Totalcomp, TEI 29
Totalcomp, THS 114
Totalcomp, TJA 169
Totalcomp, TM101 94
Totalcomp, TM301 93
Totalcomp, TM302 93
Totalcomp, TM501 95
Totalcomp, TM503 97
Totalcomp, TM701 97
Totalcomp, TM901 91
Totalcomp, TM902 91
Totalcomp, TPR 104
Totalcomp. TDS 57
TP2611 175
TPR 104
Transcell, NCI 101
Transcell, PC 60
Transcell, SPS 101
Transcell, SRP 60
TSA 195
TSCP-431 180
TSTM 194
TT03 188
TVD 22
TVP 73
TVS 65

**U**

UC-321
  Wheel Load 108, 109, 110
UPS Shipping 60

**V**

V22PW 20
V22XW 20
V31X 20
V41PW 21
V41XW 21
V71P 21
Valor 1000 19
Vision Tech, 520B 92
Vision Tech, A520BT 92
Vision Tech, DCS-CD 113
Vision Tech, DLP-300 73
Vision Tech, GL 53
Vision Tech, MVS1 53
Vision Tech, TBW 54
Vision Tech, TBWS 54
Vision Tech, TVD 22
Vision Tech, TVP 73
Vision Tech, TVS 65

**W**

weighing dishes 181
Wheel Load 107, 111
WLC 142, 157
WLY 157
WT3 188
WTC 142

**Y**

YA 102
Yamato, AW-WLG 64
Yamato, AW-WSM 64
Yamato, DP-6900 51
Yamato, PPC-200W-II 64
Yamato, PPC-300-II 63
Yamato, PPC-300WP-II 63



13-01 Pollitt Dr Ext
Fair Lawn NJ 07410
201-797-2718



www.totalcomp.com
sales@totalcomp.com
Fax 201-797-2287

13-01 Pollitt Drive Ext
Fair Lawn NJ
07410
USA
Address Service Requested

BOUND PRINTED
MATTER
U.S. POSTAGE PAID
PARAMUS, NJ
PERMIT 545

**Mail Room Supervisor:** Our customer at your location has requested this catalog. If this catalog cannot be delivered as addressed, please forward to your company's Purchasing Manager and call us at **800-631-0347** to update the changes.

**write**
13-01 Pollitt Dr Ext
Fair Lawn NJ 07410

**phone**
201-797-2718

**fax**
(201) 797-2287

**browse**
www.totalcomp.com

**e-mail**
sales@totalcomp.com