

TBT CS

Base



TBT CS

Heavy duty floor scales designed for a variety of weighing application.

- ✓ *Overload protection for both static and dynamic overloads.*
- ✓ *TBT-CS with Stainless Steel platter*
- ✓ *Aluminium load cells.*
- ✓ *Adjustable rubber feet.*
- ✓ *Bubble level.*
- ✓ *NTEP 14-050 III 5,000 div*



Totalcomp[®] Scales & Components

99 Reagent Lane • Fair Lawn, New Jersey 07410

Fax: 201-797-2287 • Toll Free Fax: 888-797-2288 • Phone: 201-797-2718 • Toll Free Phone: 800-631-0347

Email: sales@totalcomp.com • Website: www.totalcomp.com

TBT PLATFORM BASE

Part Number	Size	Capacity	Load Cell Type	Load Cell	Weight
TBT-1212-15	12" x 12" Platform x 4.25"H	15 lb	Aluminium	L6D-15 kg	30 lb
TBT-1212-30	12" x 12" Platform x 4.25"H	30 lb	Aluminium	L6D-30 kg	30 lb
TBT-1212-50	12" x 12" Platform x 4.25"H	50 lb	Aluminium	L6D-50 kg	30 lb
TBT-1212-100	12" x 12" Platform x 4.25"H	100 lb	Aluminium	L6D-100 kg	30 lb
TBT-1616-50-CS	16" x 16" Platform x 4.75"H	50 lb	Aluminium	L6E-50 kg	30 lb
TBT-1616-100-CS	16" x 16" Platform x 4.75"H	100 lb	Aluminium	L6E-100 kg	30 lb
TBT-1616-300-CS	16" x 16" Platform x 4.25"H	300 lb	Aluminium	L6E-300 kg	30 lb
TBT-1616-400-CS	16" x 16" Platform x 4.75"H	400 lb	Aluminium	L6E-400 kg	30 lb
TBT-1818-100-CS	18" x 18" Platform x 5.5"H	100 lb	Aluminium	L6G-100 kg	70 lb
TBT-1818-200-CS	18" x 18" Platform x 5.5"H	200 lb	Aluminium	L6G-200 kg	70 lb
TBT-1818-300-CS	18" x 18" Platform x 5.5"H	300 lb	Aluminium	L6G-300 kg	70 lb
TBT-2424-100-CS	24" x 24" Platform x 5.5"H	100 lb	Aluminium	L6G-100 kg	82 lb
TBT-2424-200-CS	24" x 24" Platform x 5.5"H	200 lb	Aluminium	L6G-200 kg	82 lb
TBT-2424-250-CS	24" x 24" Platform x 5.5"H	250 lb	Aluminium	L6G-250 kg	82 lb
TBT-2424-300-CS	24" x 24" Platform x 5.5"H	300 lb	Aluminium	L6G-300 kg	82 lb
TBT-2424-500-CS	24" x 24" Platform x 5.5"H	500 lb	Aluminium	L6G-500 kg	82 lb
TBT-2424-1000-CS	24" x 24" Platform x 5.5"H	1,000 lb	Aluminium	L6G-600 kg	82 lb

Performance

Full Scale Output
2 mv/v

Combined Error
0.02%

Electrical

Bridge Resistance
TBT-CS

Input 405 ohms
Output 350 ohms


Temperature

Temperature Operating Range
0°C to +40°C

Wiring

Cable Length & Type
9 foot, 6 conductor

Part Number	A	B	C	D
TBT-1212	12"	12"	3"	1"
TBT-1616	16"	16"	4"	1"
TBT-1818	18"	18"	4"	1"
TBT2424	24"	24"	4"	1"

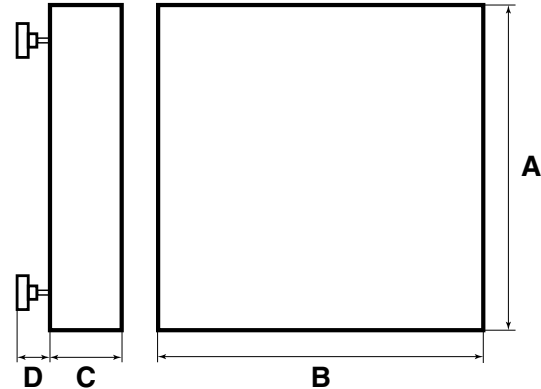

TOTALCOMP LIMITED WARRANTY

Totalcomp warrants this product to be free of defects in materials and/or workmanship and suitable for the purpose(s) intended as outlined on this sheet. This warranty is effective and shall cover the purchaser for one year from the date of shipment from our plant. If this product is found to be defective by our inspection in accordance with the above listed criteria, we will replace or repair it at our expense. For warranty service, please obtain a return authorization number from us and return the item, shipping prepaid, with a written description of the problem. We will respond promptly with the results of our evaluation.



Totalcomp®

Scales & Components

99 Reagent Lane
Fair Lawn, NJ 07410
Fax (201) 797-2287
Toll Free Fax (888) 797-2288
Phone (201) 797-2718
Toll Free Phone (800) 631-0347
Email sales@totalcomp.com
Website www.totalcomp.com