



**A Multifunction Scale  
that doesn't just weigh!**

# ED Series

Multifunction SCALE



**Multifunction Scale!**

Simple Weighing • Accumulating  
Counting • Checkweighing

**CAS**  
S • C • A • L • E



# ED Series Multifunction Scale

## Features

- Dual Range - 4 Capacities Available
- High resolution for accurate weighing/counting
- Simple and easy operation (9 large function keys)
- Counting & percentage mode
- Accumulation mode
- Weight/Count/Percentage comparison function (HI/OK/LO) with alarm beeps
- RS-232C interface (PC/Printer)
- Rechargeable battery
- Battery Saver w/Auto Power Off
- Backlight LCD
- Options: DLP-50 Label Printer  
DEP-50 Receipt Printer  
Dust Protection Cover
- Legal for Trade - COC # 09-072  
\* Counting feature not legal for trade



**The ED Series is an advanced multifunction scale, from checkweighing to counting...**


## Specifications

Model	ED-6	ED-15	ED-30	ED-60	
Capacity & Resolution	lb	3/6 lb	6/15 lb	15/30 lb	30/60 lb
		0.001/0.002	0.002/0.005	0.005/0.01	0.01/0.02
	oz	40/100 oz	80/160 oz	200/400 oz	400/1000 oz
		0.02/0.05	0.05/0.1	0.1/0.2	0.2/0.5
	kg	1.5/3 kg	3/6 kg	6/15 kg	15/30 kg
		0.0005/0.001	0.001/0.002	0.002/0.005	0.005/0.01
	g	1500/3000 g	3000/6000 g	6000/15000 g	15000/30000 g
		0.5/1	1/2	2/5	5/10
External Resolution	1/3,000				
Internal Resolution	1/60,000				
Display	LCD with Backlight				
Display Designators	STABLE, ZERO, NET, SUM, LO, OK, HI, pcs, lb, oz, g, kg, %, LACK OF UNIT				
Zero Range	+/- 2%				
Tare Range	Full Capacity by Subtraction				
Power	AC adapter DC 12V/1A or 12V/800mA				
	Internal rechargeable sealed acid battery - 6V DC				
Battery Life	170 hours (without backlight)				
Product Size (inch/mm)	13(W) x 13.6(D) x 4.2(H) / 330(W) x 346(D) x 107(H)				
Platter Size (inch/mm)	12(W) x 8.75(D) / 300(W) x 222(D)				
Operating Temp	-10°C ~ 40°C / 14°F ~ 104°F				
Product Weight	9.9 lbs/4.5 kg				

## Labels & Receipt Samples



## Dimensions

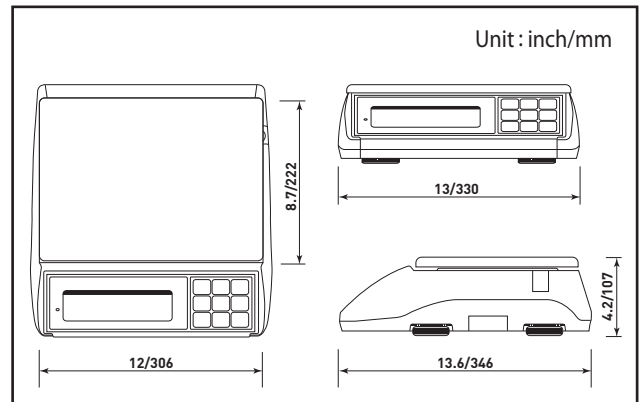

**CAS USA Corporation**  
Corporate Office  
99 Murray Hill Parkway  
East Rutherford, NJ 07073  
Tel: (201) 933-9002  
Fax: (201) 933-9025  
http://www.cas-usa.com



Specifications are subject to change without prior notice U31028020